

AQUALISA

S2 SINGLE OUTLET SMART SHOWER

WITH WI-FI CONNECTED TECHNOLOGY AND
HD TEMPERATURE DISPLAY, ADJUSTABLE HANDSET
HP / COMBI / BOOSTED GRAVITY

Chrome / Matt Black / Brushed Brass / Gunmetal Grey

S2C.H.U


S2MB.H.U

S2BB.H.U


S2GG.H.U

DIMENSIONAL DRAWINGS


S2 Single Outlet Controller

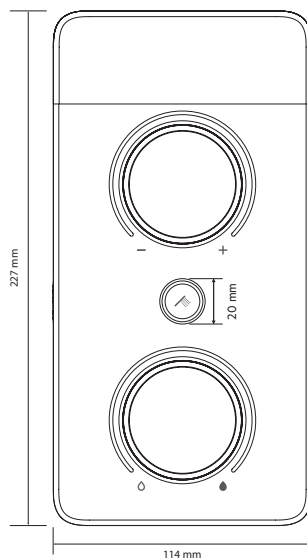


Rail Kit

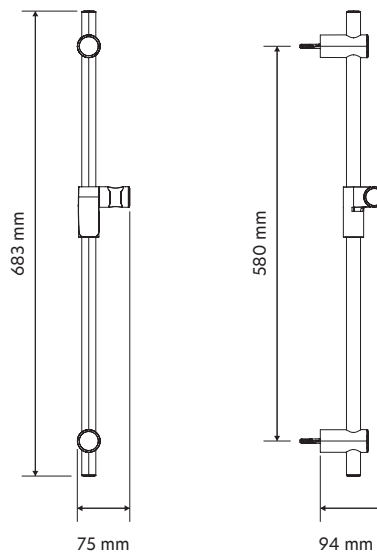


120mm Adjustable Handset

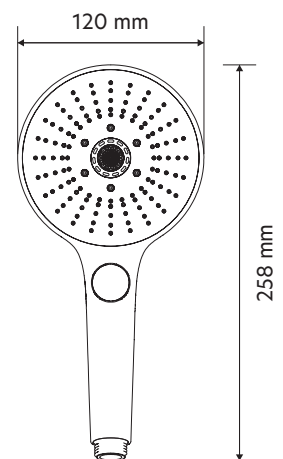


Wall Outlet

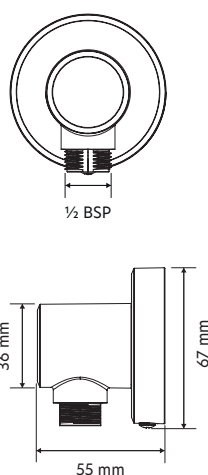

1.5m Hose



Un-Pumped Single Outlet SmartValve™
HP / Combi / Boosted gravity

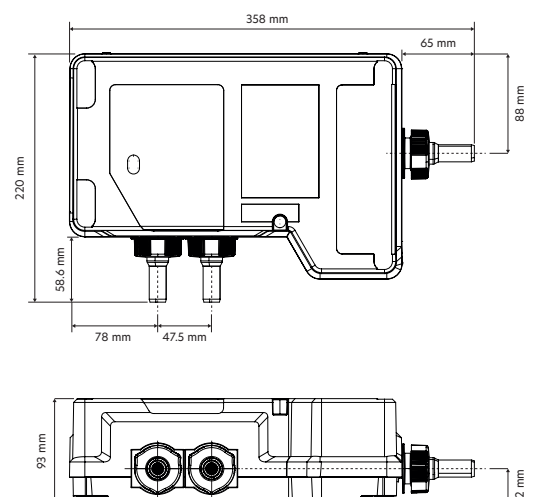

AQUALISA

S2 SINGLE OUTLET
SMART SHOWER

WITH WI-FI CONNECTED TECHNOLOGY AND
HD TEMPERATURE DISPLAY, ADJUSTABLE HANDSET
HP / COMBI / BOOSTED GRAVITY

Chrome / Matt Black / Brushed Brass / Gunmetal Grey

S2C.H.U

S2MB.H.U

S2BB.H.U

S2GG.H.U

TECHNICAL SPECIFICATIONS

Minimum operating pressure	1 Bar
Maximum operating pressure	5 Bar
Aqualisa SmartValve™ inlet fitting connections	15mm push fit fittings, valve inlet centres 47.5mm, inlet supply positions - hot right, cold left
Aqualisa SmartValve™ outlet fitting connection	15mm push fit
Permissible Aqualisa SmartValve™ siting location	Loft, airing cupboard, under bath
Supply temperature	Cold inlet temperature 1°C (minimum) Cold inlet temperature 15°C (maximum) Hot inlet temperature 65°C (maximum)
Water system	HP / Combi / Boosted gravity
Features	Digital display with temperature and flow control dial with lighting indication
	Illuminated push buttons to divert between outlets including pre-set temperature and flow
	Metal faceplate and dials including mood backlighting, adjustable via app
	Auto 'wake up' and lighting indicator to let you when know your chosen temperature has been reached
	Wifi, Mobile App, Google Home & Amazon Alexa enabled to allow you to control your shower remotely including profile selection
	120mm 3 spray adjustable head with push button spray selector
	Optional on/off and temperature control wired remote
Guarantee period	5-year guarantee - shower unit
	2-year guarantee - shower head and kit
Approvals	CE Marking
	UKCA
	BEAB