



GENERAL INFORMATION

Tools/Materials Required (not supplied)

Spanners
Screwdriver
Pencil or Marker Pen
Measuring Tape
Lubricant
Power Drill and suitable bit(s)
Model knife
Ball Head hammer



Chemicals & paints


Do not allow the inlet valve to come into contact with jointing compounds, cellulose based paints, paint thinners or strippers, solder flux, acid based descalents or aggressive cleaning products including those below pH4, high in hypochlorite (e.g. bleach) or containing hydrogen peroxide.

The Water Regulations have a requirement to fit a servicing valve adjacent to the cistern.

Access panel to the cistern should be provided for maintenance purposes.

It is the installer/specifiers responsibility to ensure compatibility with other manufacturers WC pans.

bottom inlet option

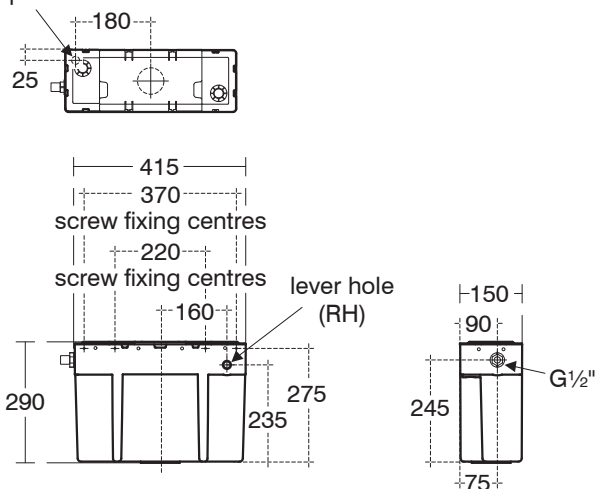

It is essential that the inlet and outlet valve seals are checked for water tightness before installing the tank.


When connecting float operated fill valve to water supply pipework, adjust the float to give shut off at the water level as marked on cistern. See table 3 below.

INLET


• PREPARE



For low pressure installation under 0.2 bar, remove the restrictor from inlet valve and ensure the open end of the filter is placed towards the inlet valve . (see diagram below)

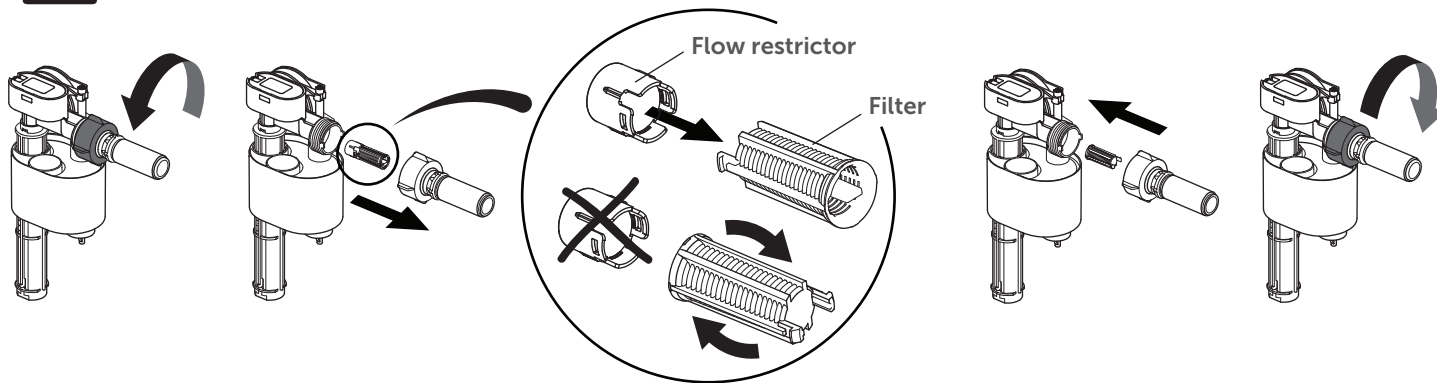


• SIDE INLET INSTALLATION

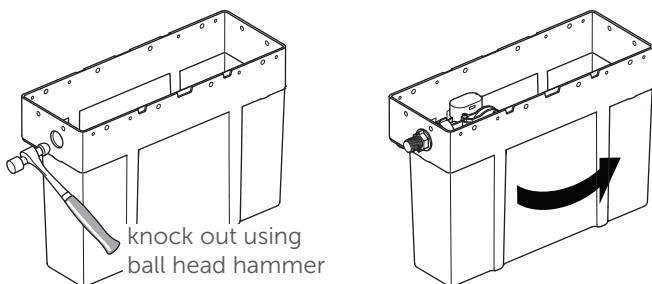

Side inlet is located on the left side of the tank. However, the tank is reversible if right hand inlet installation is required.

• BOTTOM INLET INSTALLATION

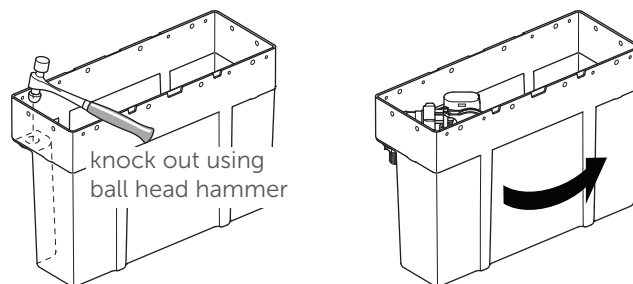


Tank can be rotated for left or right bottom inlet.


NOTE: Connection position is diagonally opposite when reversed.

If not accessible , plumb connection before mounting the cistern. Please do NOT leave the knock outs in the tank once popped out.


LH




RH



LH




RH




NOTE: Ensure that the syphon angle is adjusted if the tank is reversed.


• SETUP INLET FOR TOP INSTALLATION

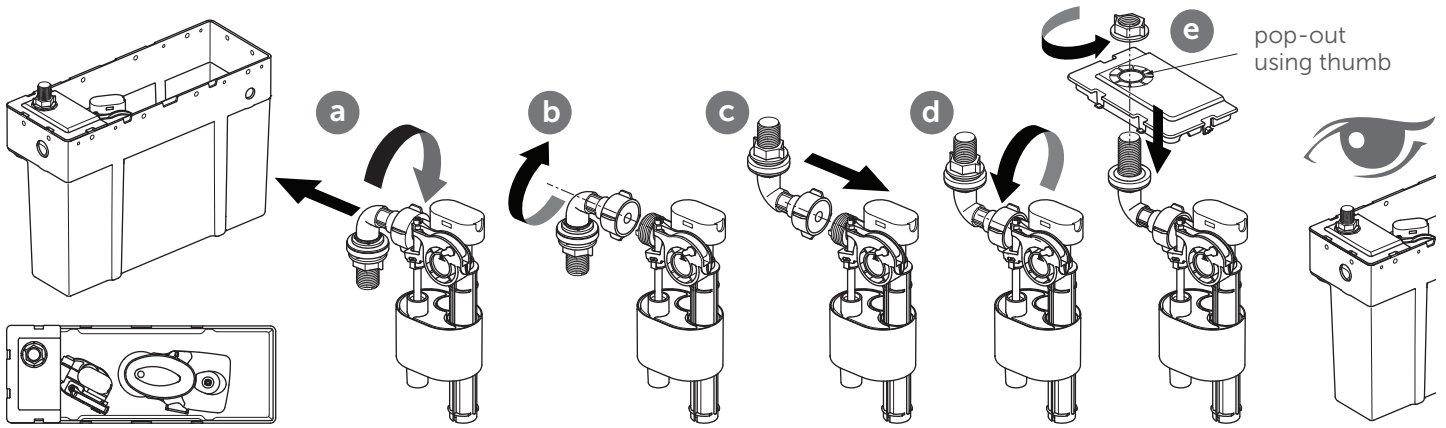


• MAINTENANCE

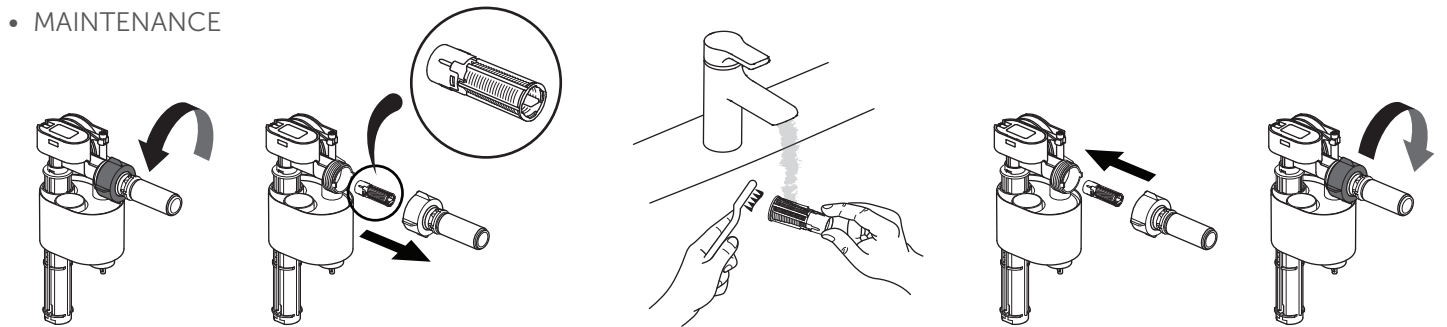

LEVER OPERATED

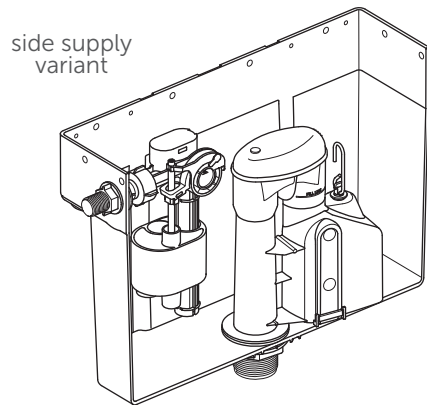


Illustrations shown may not represent product supplied

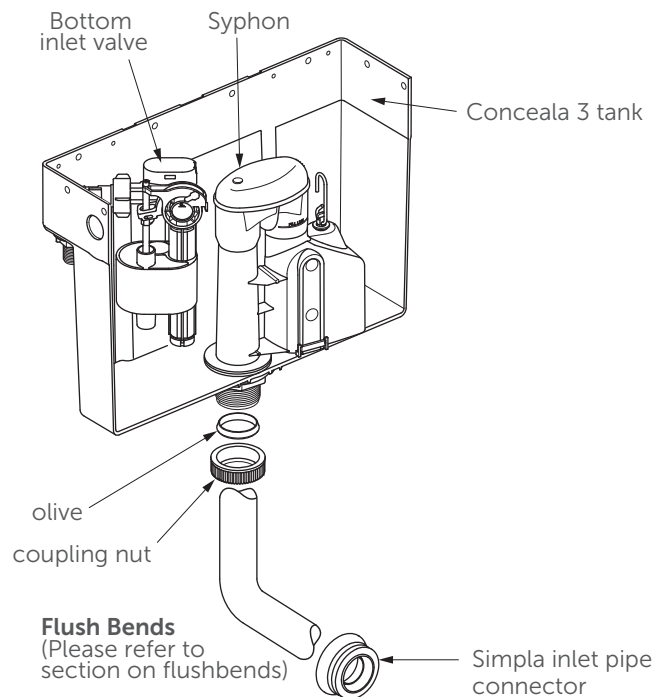


FLUSH BENDS

Assembly of Constructed Bend

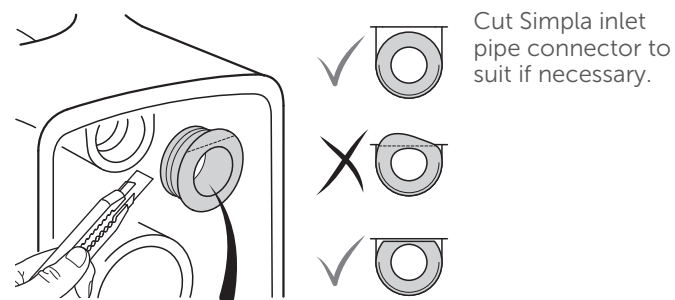

Flush bend(s) supplied vary between Conceala
Supplied bend can be cut for customer needs.

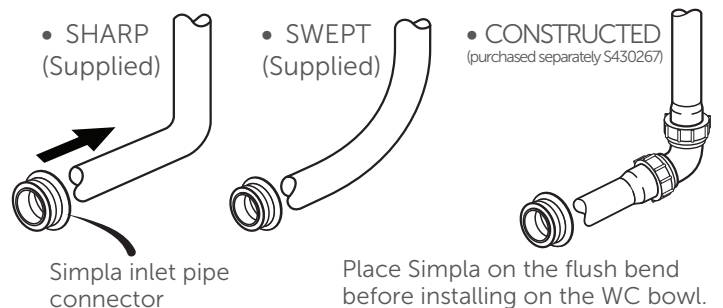


TANK MOUNTING

Four fixing holes are supplied in back and front faces of tank for front or rear wall mounting. Note: Tanks are reversible.


Components must be repositioned when alternative lever/inlet position is selected.

• FRONT VIEW



view on rear of tank

• BACK VIEW




Note: Secure to wall using **corrosive resistant fasteners** suitable to wall construction (not supplied).

LEVER OPERATED

TYPICAL ARRANGEMENTS



• FRONT FIXING

For lever fixing, please refer to details supplied with the lever.

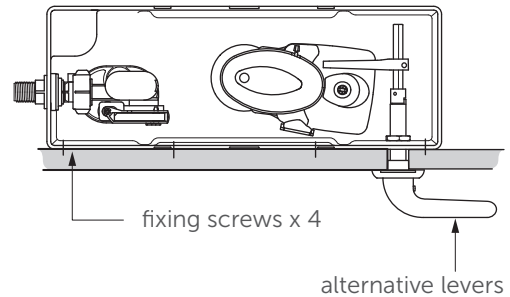


INSTALLATION REQUIREMENTS

NOTE: Concept Freedom Wall Mounted and Back To Wall pans and all Back To Wall Mounted pans with Aquablade technology are not suitable for use with lever operated cisterns. All dimensions shown in millimetres. Dimensions shown may vary within permitted tolerances.

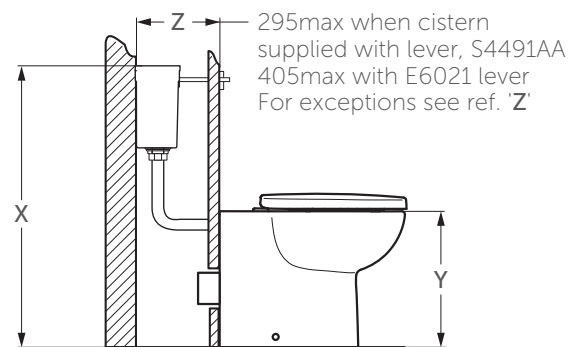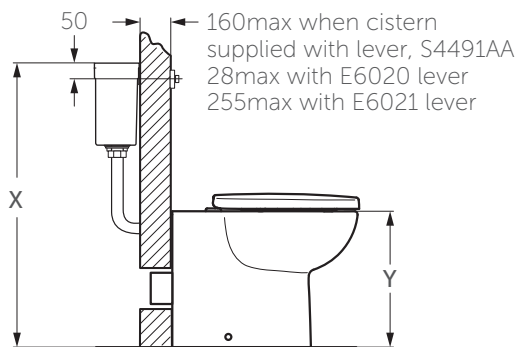

INSTALLATION

Installer should ensure an isolation valve is fitted on the water supply as close as possible to the cistern and ensure the pipe is flushed before connection to the cistern to avoid the inlet valve filter and restrictor from becoming blocked

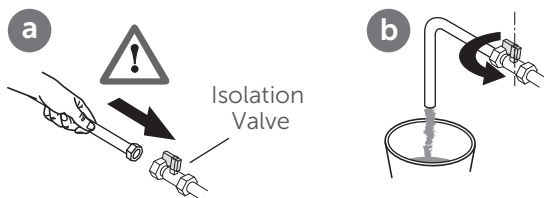

Turn on and check supply for leaks

Check all joints to ensure they are sound and watertight (inlet and outlet valve nuts). Check that the inlet valve does not foul on the outlet valve or the side wall of the cistern.

Float adjustment


Use a screwdriver to raise and lower the shut off float assembly.

Look for the marked waterline inside the tank.

Flush the tank and check that the tank refills to the marked water line, if not rotate the stalk with a screwdriver – clockwise to raise the shut off point and anti-clockwise to lower it.

Flow restrictor

See first page.

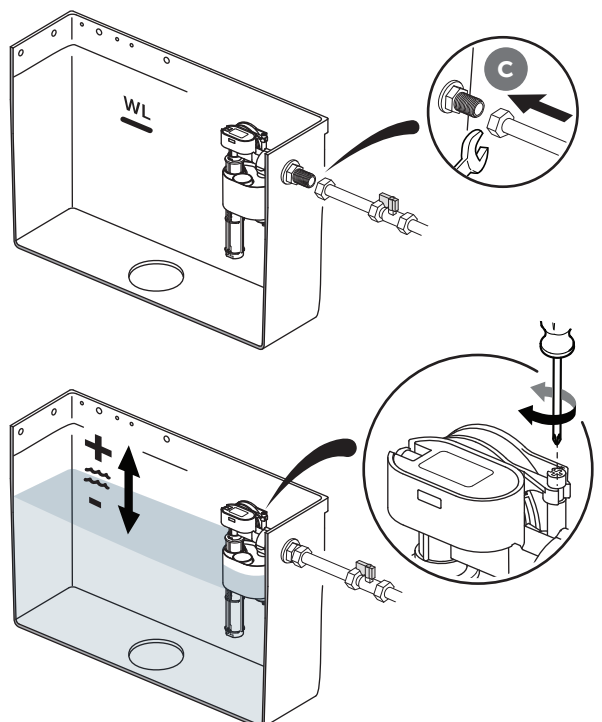

SKU	Description	Inst. type	Bend type	X	Y	Z	SKU	Description	Inst. type	Bend type	X	Y	Z
S3127	Contour 21 Splash	WM	sharp	780	355	250	E2225	Calla	BTW	swept	910	400	250
V3910	Sandringham	WM	swept	870	400	250	S3047	Contour 21	BTW	swept	820	355	250
T4522	IS I.Life A	WM	swept	870	400	250	S3086	Contour 21	BTW	swept	820	355	250
T4670	IS I.Life A S&C SC	WM	swept	870	400	250	S3125	Contour 21 Splash	BTW	swept	870	355	250
T4716	IS I.Life A	WM	swept	870	400	250	S3095	Profile 21	BTW	swept	870	400	250
P0227	Ulysse S&C NC	WM	swept	870	400	250	E8016	New Studio	BTW	swept	870	400	250
P0228	Ulysse S&C SC	WM	swept	870	400	250	E8082	New Studio	BTW	swept	870	400	250
T4817	IS I.Life A	WM	swept	870	400	250	S0795	Edit R	BTW	swept	870	400	250
T4523	IS I.Life A	WM	swept	910	400	250	E8974	Sandringham 21	BTW	swept	870	395	250
T4680	IS I.Life A	WM	swept	910	400	250	S0440	Contour 21	BTW	swept	910	450	250
E2473	IS I.Life A	WM	swept	910	400	250	S0439	Contour 21	BTW	swept	870	410	250
T4671	IS I.Life A	WM	swept	910	400	250	S3122	Contour 21 Splash	BTW	sharp	790	305	250
T4717	IS I.Life A	WM	swept	910	400	250	S3046	Contour 21	BTW	swept	760	305	250
P0229	Okyris	WM	swept	910	400	250	E7866	Concept	BTW	swept	870	400	250
T4932	Tesi RimLS+	WM	swept	910	400	250	E7916	Concept	BTW	swept	870	400	250
T5360	Tesi RimLS+ RimLS+ S&C SC SW	WM	swept	910	400	250	E7985	Concept	BTW	swept	870	400	250
T5361	Tesi RimLS+ RimLS+ S&C SC WO	WM	swept	910	400	250	E7849	Concept	BTW	swept	870	400	250
T5207	Blend Cube RL2.0 S&C SC	WM	swept	930	400	250	E7115	Concept	BTW	swept	870	400	250
T4656	Blend Cube RL2.0	WM	swept	930	400	250	E8034	Concept	BTW	swept	870	400	250
R0276	Blend Curve RL2.0 S&C SC	WM	swept	910	400	250	S0437	Contour 21+ 700	BTW	construct	870	450	250
T5206	Blend Curve RL2.0 S&C SC	WM	swept	910	400	250	S0438	Contour 21+ 750	BTW	construct	870	450	250
T4655	Blend Curve RL2.0	WM	swept	910	400	250	U4712	Waverley	BTW	swept	870	400	250
E7907	Concept	WM	swept	870	400	250	T4525	IS I.Life A	BTW	swept	910	400	250
E8035	Connect	WM	swept	870	450	250	E2474	IS I.Life A	BTW	swept	910	400	250
S3077	Contour 21	WM	swept	870	450	250	T4719	IS I.Life A	BTW	swept	910	400	250
S3078	Contour 21	WM	swept	910	450	250	T4594	IS I.Life S	BTW	swept	870	400	250
S0443	Contour 21 RL	WM	swept	910	450	250	T5197	IS I.Life S	BTW	swept	870	400	250
E6090	Contour 21 F	WM	swept	910	460	250	T4616	IS I.Life B	BTW	swept	910	400	250
T4592	IS I.Life S	WM	swept	870	400	250	E2608	IS I.Life B	BTW	swept	910	400	250
T4738	IS I.Life S	WM	swept	870	400	250	S3340	Perth2 + Seat	BTW	swept	870	400	250
T5001	IS I.Life S	WM	swept	870	400	250							
T4614	IS I.Life B	WM	swept	910	400	250							
T5217	IS I.Life B	WM	swept	910	400	250							
T5330	IS I.Life B	WM	swept	910	400	250							
T5347	IS I.Life B	WM	swept	910	400	250							
S0442	Contour 21+ 750	WM	swept	870	450	250							
S0441	Contour 21+ 700	WM	swept	870	450	250							

Table 1

*** Bowls use constructed bend, not included. (purchased separately S430267)
Back to wall (BTW) bowls don't have "Y" value to consider. WM – Wall mounted

CUSTOMER CARE HELPLINE

01482 496318

FAX LINE 01482 499611

email: customercare@idealstandard.com

WW10**0067**₆₇

ver. 1.3 / 09.24

We pursue a policy of continuing improvement in design and performance of our products. The right is, therefore, reserved to vary specifications without notice.