

sola thermostatic dm surgeons mixer lever

flow straightener compliant to HTM 04-01
removable spout version suitable for autoclaving
self draining spout with smooth internals



Deck mounted

to specify/order:

Please use the product reference
shown below.

sola thermostatic surgeons mixer, lever, including

Deck mounted, fixed spout **SF1133CP**
Deck mounted, detachable spout **SF1134CP**

finish

Chrome plated CP

approvals

BREEAM compliant
TMV3
WRAS Approved



recommended operating pressure


Minimum operating pressure 1 bar.
Maximum static pressure 12 bar.
Maximum dynamic pressure 5 bar.

available accessories

Flushing kit **SF0115XX**
Filter housing removal tool **SF0116XX**
Removable spout **SF0117CP**
Nozzle outlet **SF0118CP**

additional features

- One piece thermostatic cartridge
- Complete with brass back nuts
- Built in pasteurisation facility
- Isolation valves, check valves & filters front accessible
- Cool touch body

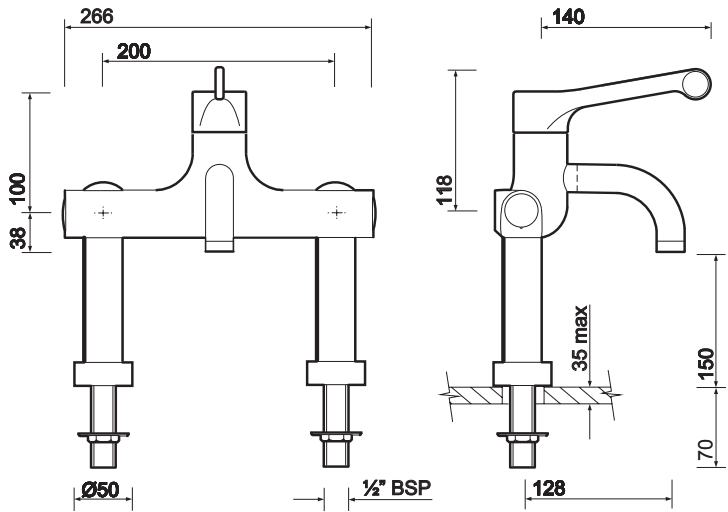

Manual Surgeons Mixer SF1133/4CP

Flow Rate (Litres per minute)	1 Bar	2 Bar	3 Bar	4 Bar	5 Bar
With Flow Regulators Fitted	4.1	4.6	5.1	6	6

All measurements shown are in millimeters. Drawing sizes are not to scale.



Healthcare



Commercial