


sola shower fittings

soap dish
height adjustable handset
available as single or three mode handset

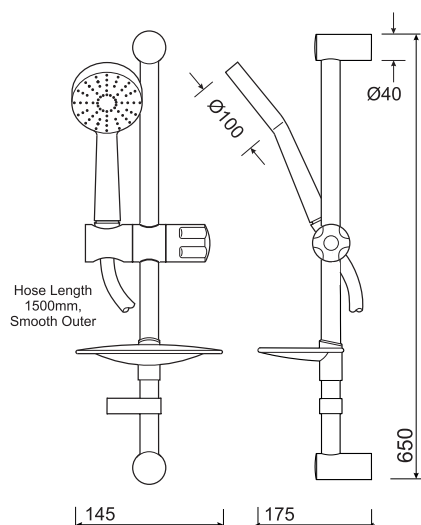

Shower rail, hose & head

Sola Shower Rail Hose & Head

Single Function, smooth hose **SF1256CP**

*Outlet Boss

SF1150CP

finish: Chrome plated CP

recommended operating pressure

Min. operating pressure 0.1 bar.

Max. dynamic pressure 5 bar.


1500mm hose.

* When used with a Concealed shower

sola shower rail, hose & head - single function

Riser Rail Shower Kit, Single Function Head – SF1256CP

Flow Rate (Litres per minute)	0.5 Bar	1 Bar	2 Bar	3 Bar	4 Bar	5 Bar
Without Flow Regulator Fitted	9.2	12.7	18.2	22.3	26.0	29.1
8 ltr/min Flow Limiter (supplied)	5.4	7.1	8.4	7.8	7.5	7.6

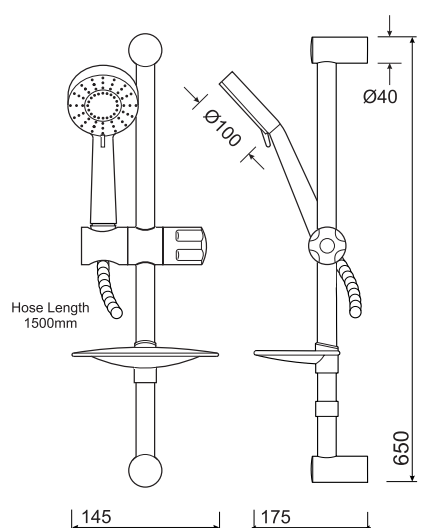

Shower rail, hose & head

Sola Shower Rail Hose & Head

- Multi Function, braided hose **SF1261CP**

8 LPM Flow regulator

XS9008XX

*Outlet Boss

SF1150CP

finish: Chrome plated CP

recommended operating pressure

Min. operating pressure 0.1 bar.

Max. dynamic pressure 5 bar.

1500mm hose.

* When used with a Concealed shower

sola shower rail, hose & head - multi function

Riser Rail Shower Kit, Multi Function Head – SF1261CP

Flow Rate (Litres per minute)	0.5 Bar	1 Bar	2 Bar	3 Bar	4 Bar	5 Bar
Without Flow Regulator Fitted	10.2	14.2	18.9	24.0	27.1	30.5

All measurements shown are in millimetres. Drawing sizes are not to scale.



Hotels



Healthcare



Education



Commercial



Residential



Less Able

Twyford
Geberit Group