


## Non Concussive Tap

### SF2251CP & SF2252CP

### Installation and Maintenance Instructions

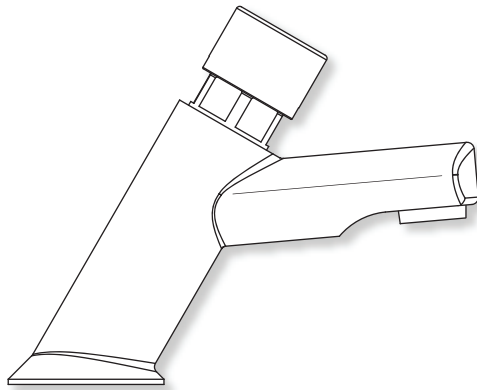

In this procedure document we have endeavoured to make the information as accurate as possible.

We cannot accept any responsibility should it be found that in any respect the information is inaccurate or incomplete or becomes so as a result of further developments or otherwise.

## Introduction

This installation guide has been produced for the SF2251CP & SF2252CP non concussive taps. These instructions cover the installation, operation and maintenance. Please read the enclosed instructions before commencing the installation of this product, please note;

**We recommend that the installation of any Twyford product is carried out by an approved installer.**

## Products

Non concussive tap - contemporary style - pair of taps	SF2251CP
Non concussive tap - contemporary style - single tap	SF2252CP

## Check Contents

Before commencing remove all components from packaging and ensuring all parts are present, before discarding any packaging. If any parts are missing, do not attempt to install your Twyford non concussive tap(s) until the missing parts have been obtained.

## Water Supply (Water Fittings) Regulations 1999

The Twyford non concussive tap(s) must be installed in accordance with the Water Bye laws.

To prevent back flow and contamination of the water supply for drinking and culinary purposes taps must provide an AUK2 or AUK3 air gap between the outlet and the basin.

Twyford basin taps provide a type AUK2 airgap for domestic usage and a type AUK3 for non domestic locations.


In order to prevent scalding the hot water tap should be connected to the hot water supply via a thermostatic mixing valve (TMV).

It is recommended that a service valve is installed in the cold water supply pipe and a thermostatic mixing valve with integral isolating valves in the hot water supply, should servicing be required in the future.

## Technical Specification

Maximum operating pressure:	10 bar - static
Minimum operating pressure:	0.5 bar - dynamic
Flow regulator:	8 l/min
Maximum inlet temperature:	65°C
Flow time at 1 bar:	15±3 seconds
Maximum basin thickness:	26 mm

## Dimensions

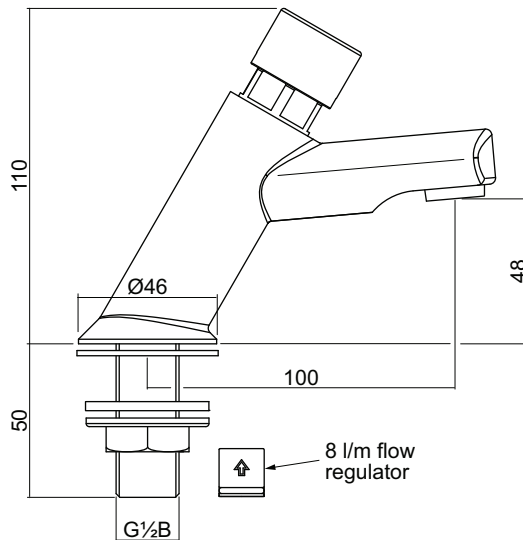

## Installation

**Important:** All plumbing is to be installed in accordance with applicable codes and regulations.

Flush the water supply pipes thoroughly prior to installation. Do not allow debris, PTFE tape or any metal particles to enter the tap.

The easiest way to install the tap(s) to the basin is to do so before the basin is installed, when the back nuts are easily accessible.

The tap for the hot water should be fitted on the left when facing the basin and the cold on the right.

The service indicators are supplied separately, one blue and one red for each tap which can be inserted into the control knob once the taps have been installed.

8 l/min flow regulators are supplied separately, which are optional. If required insert the regulator into the threaded inlet of the tap and push in until a resistance is encountered.

If replacing existing taps ensure the water supply is turned off and that the old taps are completely removed.

Insert the threaded inlet through the hole in the basin, fit the rubber sealing washer and back nut onto the threaded inlet to secure the tap.

Ensure the tap(s) are positioned correctly over the basin.

Do not over tighten the back nut.

## Installation

Use a swivel connector with a fibre washer (tap connector) to connect the water supply and make a water tight joint.

NOTE: If replacing existing taps the threaded inlet may be shorter than the original taps.

Repeat the operation for the second tap.

The red or blue service indicator is fitted by inserting into the control knob and pushing until flush with the top of the knob.

Turn on the water supply to both taps, run the water for several minutes before checking for any leaks.

## Aftercare

- Twyford taps have a high quality finish and should be treated with care.
- An occasional wipe with a mild washing-up liquid on a soft damp cloth followed by a thorough rinsing is all that is required.
- Do not use an abrasive or chemical household cleaner as this may cause damage to the surface finish.

**Please leave this Manual for the User**

## Twyford Guarantee

At Twyford, we want to make things as easy as possible for our customers. That's why we design products that are easy to fit and use, and that are quality tested to make sure they won't let you down. It's also why we offer solid guarantees on all products, effective from the date of purchase, to give you peace of mind.

Twyford non concussive taps are covered by a parts only **2 year guarantee**.

### Guarantee Terms and Conditions

This guarantee is in addition to your statutory and other legal rights and is subject to the following conditions:

- The product was purchased within the United Kingdom or Republic of Ireland.
- The guarantee applies solely to the original purchaser with proof of purchase.
- The installation must allow ready access to all products for the purpose of inspection, maintenance or replacement.
- Repair under this guarantee does not extend the original expiry date. The guarantee on any replacement parts or products ends at the original expiry date.
- Any part found to be defective during the guarantee period will be replaced without charge, providing that the product has been installed in accordance with the instructions given in this guide and used as the manufacturer intended.

The guarantee does not cover damage or defects caused by:

- General wear and tear (including special non-chrome finishes; components such as filters, seals, 'O' rings and washers).
- Incorrect installation.
- Repair using non-Twyford parts
- Accidental or wilful misuse
- Corrosion and the use of inappropriate cleaning products.

- System debris including the build up of limescale (which can be controlled through regular servicing and maintenance).

The guarantee does not cover compensation for loss of use of the product or consequential loss of any kind.

In the interests of continuous product improvement, Twyford reserves the right to alter product specifications without notice.

The Twyford Product Guarantee does not affect your statutory rights as a consumer.

### Need help?

If this product does not function correctly when first used, contact **Geberit Technical Department on 01926 516800** where our expert team of advisors will be able to offer you help and advice.

### Problems during the guarantee period

In the unlikely event that you encounter any problems with the product during the guarantee period, contact **Geberit Technical Department on 01926 516800** with your proof of purchase and we will work to resolve the problem quickly.

### Technical support hotline

(Tel: **01926 516800**) with access to fully trained advisors who can offer installation advice, talk you through quick maintenance checks, or recommend the best course of action to fix any problems with a product.

### Contact Us

For any queries please contact us or visit our website for further information:

Email: [technical@geberit.co.uk](mailto:technical@geberit.co.uk)

Website: [www.twyfordbathrooms.com](http://www.twyfordbathrooms.com)

Telephone: 01926 516800

**Notes:**

**Notes:**



E & O.E

03-11-21

---

**Geberit Sales Ltd, Geberit House**  
**Edghehill Drive, Warwick, CV34 6NH**

**Geberit International AG Schachenstrasse**  
**77, CH-8645 Jona**  
**documentation@geberit.com**  
**www.geberit.com**