

AQUALISA

eVOLVE™


ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD

- MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
- SATIN SILVER


MIDNIGHT BLACK	8.5KW	VOTZ25
	9.5KW	VOTZ26
	10.5KW	VOTZ27
ARCTIC WHITE	8.5KW	VOPZ25
	9.5KW	VOPZ26
	10.5KW	VOPZ27
SPACE GREY	8.5KW	VOXZ25
	9.5KW	VOXZ26
	10.5KW	VOXZ27

DIMENSIONAL DRAWINGS

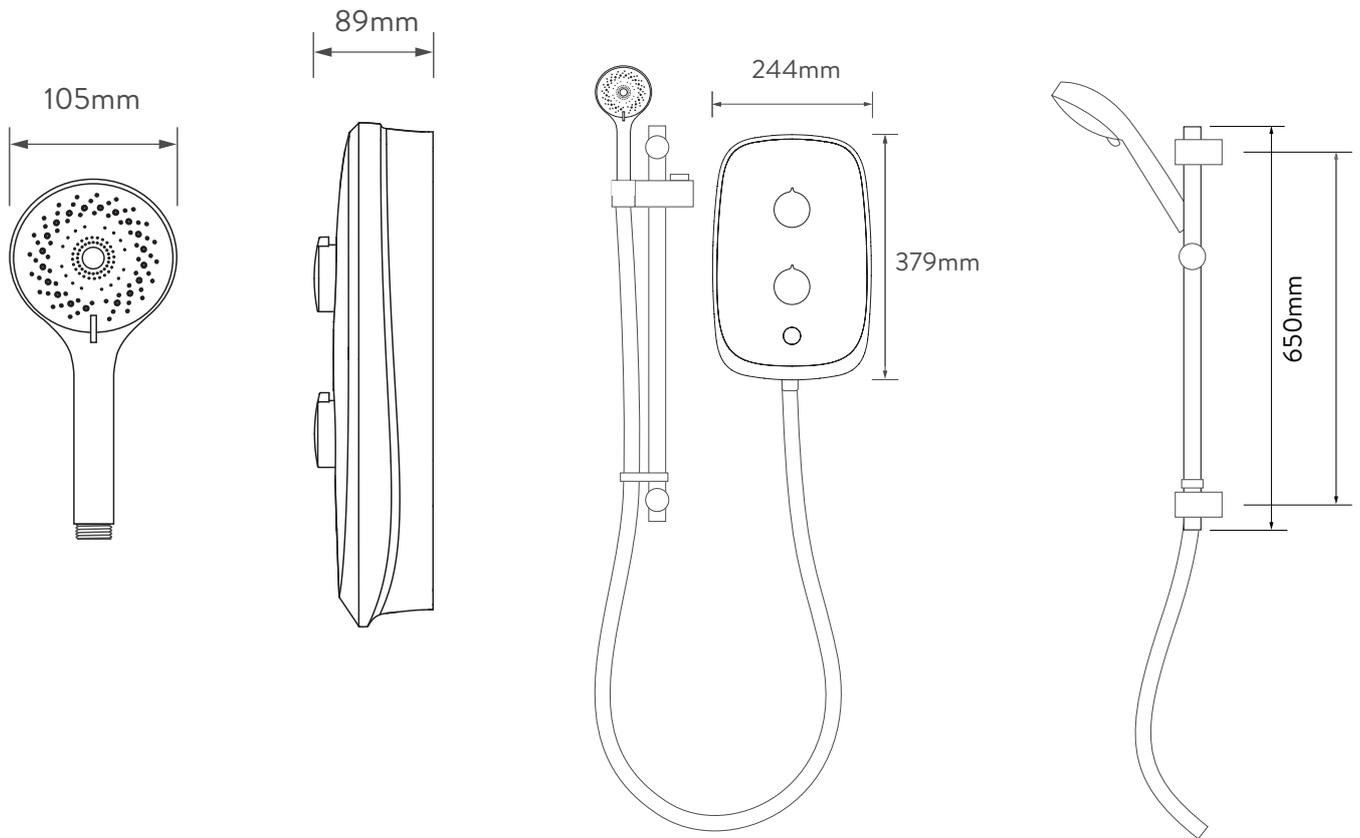

CONNECTIONS

-  ELECTRICAL
-  WATER

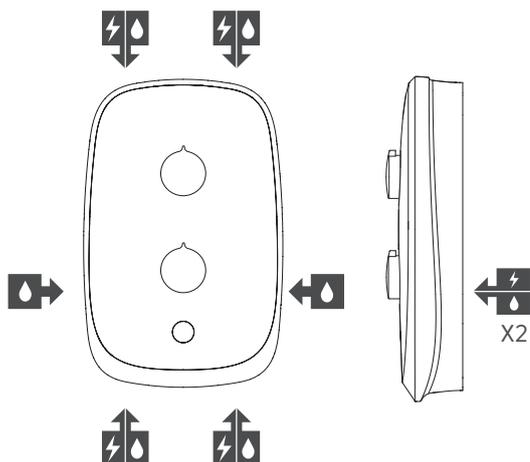

The company reserves the right to alter, change or modify the product or product specifications without prior warning. Please refer to the installation guides for technical information.

AQUALISA

eVOLVE™

ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD
 - MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
 - SATIN SILVER

MIDNIGHT BLACK	8.5KW	VOTZ25
	9.5KW	VOTZ26
	10.5KW	VOTZ27
ARCTIC WHITE	8.5KW	VOPZ25
	9.5KW	VOPZ26
	10.5KW	VOPZ27
SPACE GREY	8.5KW	VOXZ25
	9.5KW	VOXZ26
	10.5KW	VOXZ27

TECHNICAL SPECIFICATIONS

Power	8.5KW / 9.5KW / 10.5KW
Minimum pressure	0.085 MPa (0.85 bar) Recommended: 1 bar
Maximum pressure	1.0 MPa (10 bar)
Recommended maximum pressure	3 bar
Water entry points	Right hand side and left hand side: top, bottom, side and rear
Cable entry points	Right hand side and left hand side: top, bottom and rear
Inlet fitting connections	15mm compression or push fit elbow
Outlet fitting connections	1/2" BSP thread
Electric requirements	Supply voltage 230 – 240V, MCB rating : 8.5KW and 9.5KW - 40A 10.5KW - 45/50A
Water system	Mains cold system
Features	Digital temperature display
	Push button start/stop
	Rotary controls (power control rotary control)
	Safety features: Phased shut down, Over temperature protection
	Low pressure indicator
	Stainless steel hose
	105mm handset, 3 spray patterns (flow handset)
Colour	Midnight Black / Space Grey / Arctic White
Trim colour	Satin Silver
Guarantee period	Shower unit – 2 years
	Shower head and kit – 2 years
Approvals	CE Marking
	BEAB
	European Water Label
	ERP Directive
	WRAS