


**Actuator plate A1, for toilet, plastic # WD5001..1000 /**  
**WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000**  
**/ WD5001..1000**

|< 217 mm >|

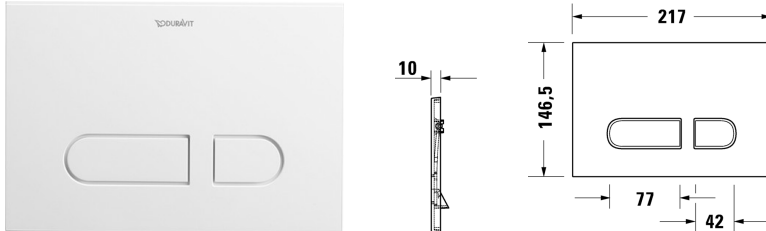

| Actuator plate A1, for toilet, plastic   | Dimension      | Weight   | Order number |
|--|----------------|----------|--------------|
| mechanical actuation, for surface mounted installation , Dual flush technology, Scope of delivery, installation frame, mounting accessoires, push rods, front plate plastic                      |                |          |              |
| <b>Colors</b>  |                |          |              |
| 00 White Alpin 03 Black Matte 04 Brushed Bronze 10 Chrome<br>34 Polished Gold 70 Brushed Stainless Steel   |                |          |              |
| <b>Variant</b>   |                |          |              |
| white  | 217 x 146,5 mm | 0.300 kg | WD5001..1000 |
| chrome highgloss   | 217 x 146,5 mm | 0.300 kg | WD5001..1000 |
| black matt   | 217 x 146,5 mm | 0.300 kg | WD5001..1000 |
| Brushed Bronze   | 217 x 146,5 mm | 0.300 kg | WD5001..1000 |
| Polished Gold  | 217 x 146,5 mm | 0.300 kg | WD5001..1000 |
| brushed stainless steel  | 217 x 146,5 mm | 0.300 kg | WD5001..1000 |
| <b>Installation accessories</b>  |                |          |              |
| Installation frame, for plastic for flush mounted installation, adjustable in depth, for wall coverings 6 - 15 mm , for drywall construction plating with minimum thickness 2 x 12,5 mm, plastic | 224,4 x 154 mm | 0.300 kg | WD6001       |
| <b>Suitable products</b>   |                |          |              |

**Actuator plate A1, for toilet, plastic # WD5001..1000 /**  
**WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000**  
**/ WD5001..1000**

|< 217 mm >|

|   |               |           |        |
|---|---------------|-----------|--------|
| <p>Toilet frame, Standard 84 cm self-supporting, for drywall construction , suitable for panelling with plasterboards, powder-coated frame, for WC ceramics with a projection of &lt;= 625 mm, adjustable feet 0–240 mm, SensoWash ready, mechanical top or front actuation, tool-free assembly of the transparent service opening plate, Requirements of the leading standards of noise protection DIN 4109 and VDI 4100 can be achieved (in combination with noise reduction set # WD6015 000 000), Cistern, concealed cistern CE tested in accordance with EN14055, maximum flush volume 9L, marking of filling height , Dual flush technology, adjustable flush volume, insulated against condensation, flushing throttle for adjustment of the flow rate, Scope of delivery, PE-wall-mounted toilet connection bend DN90/90, PE-wall-mounted toilet connection set DN90, wall-mounted toilet fastening set M12, mounting accessoires for lightweight construction, mounting accessoires for single installation, PE wall-mounted toilet reduction DN 90/110 for outlet bend , 2 cover caps, pre-installed toilet frame for wall-mounted toilet</p> | 500 x 840 mm  | 12.400 kg | WD1016 |
| <p>Toilet frame, Basic self-supporting, for drywall construction , suitable for panelling with plasterboards, powder-coated frame, for WC ceramics with a projection of &lt;= 625 mm, adjustable feet 0–240 mm, mechanical front actuation, flattenings for optimal access of press tools, metre tear and center marker, tool-free assembly of the transparent service opening plate, Requirements of the leading standards of noise protection DIN 4109 and VDI 4100 can be achieved (in combination with noise reduction set # WD6015 000 000), Cistern, concealed cistern CE tested in accordance with EN14055, maximum flush volume 9L, marking of filling height , Dual flush technology, adjustable flush volume, insulated against condensation, flushing throttle for adjustment of the flow rate, Scope of delivery, PE-wall-mounted toilet connection bend DN90/90, PE-wall-mounted toilet connection set DN90, wall-mounted toilet fastening set M12, PE wall-mounted toilet reduction DN 90/110 for outlet bend , 2 cover caps, pre-installed toilet frame for wall-mounted toilet</p>  | 500 x 1148 mm | 14.400 kg | WD1020 |
| <p>Toilet frame, Basic 99 cm self-supporting, for drywall construction , suitable for panelling with plasterboards, powder-coated frame, for WC ceramics with a projection of &lt;= 625 mm, adjustable feet 0–240 mm, mechanical top or front actuation, tool-free assembly of the transparent service opening plate, Requirements of the leading standards of noise protection DIN 4109 and VDI 4100 can be achieved (in combination with noise reduction set # WD6015 000 000), Cistern, concealed cistern CE tested in accordance with EN14055, maximum flush volume 9L, marking of filling height , Dual flush technology, adjustable flush volume, insulated against condensation, flushing throttle for adjustment of the flow rate, Scope of delivery, PE-wall-mounted toilet connection bend DN90/90, PE-wall-mounted toilet connection set DN90, wall-mounted toilet fastening set M12, mounting accessoires for lightweight construction, PE wall-mounted toilet reduction DN 90/110 for outlet bend , 2 cover caps, pre-installed toilet frame for wall-mounted toilet</p>   | 500 x 990 mm  | 12.900 kg | WD1019 |

**Actuator plate A1, for toilet, plastic # WD5001..1000 /**  
**WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000**  
**/ WD5001..1000**

|< 217 mm >|

|  |               |           |        |
|--|---------------|-----------|--------|
| <p>Toilet frame, Standard 99 cm self-supporting, for drywall construction , suitable for panelling with plasterboards, powder-coated frame, for WC ceramics with a projection of &lt;= 625 mm, adjustable feet 0–240 mm, SensoWash ready, mechanical top or front actuation, tool-free assembly of the transparent service opening plate, Requirements of the leading standards of noise protection DIN 4109 and VDI 4100 can be achieved (in combination with noise reduction set # WD6015 000 000), Cistern, concealed cistern CE tested in accordance with EN14055, maximum flush volume 9L, marking of filling height , Dual flush technology, adjustable flush volume, insulated against condensation, flushing throttle for adjustment of the flow rate, Scope of delivery, PE-wall-mounted toilet connection bend DN90/90, PE-wall-mounted toilet connection set DN90, wall-mounted toilet fastening set M12, mounting accessoires for lightweight construction, mounting accessoires for single installation, PE wall-mounted toilet reduction DN 90/110 for outlet bend , 2 cover caps, pre-installed toilet frame for wall-mounted toilet</p>  | 500 x 990 mm  | 13.400 kg | WD1018 |
| <p>Toilet frame, Basic 84 cm self-supporting, for drywall construction , suitable for panelling with plasterboards, powder-coated frame, for WC ceramics with a projection of &lt;= 625 mm, adjustable feet 0–240 mm, mechanical top or front actuation, tool-free assembly of the transparent service opening plate, Requirements of the leading standards of noise protection DIN 4109 and VDI 4100 can be achieved (in combination with noise reduction set # WD6015 000 000), Cistern, concealed cistern CE tested in accordance with EN14055, maximum flush volume 9L, marking of filling height , Dual flush technology, adjustable flush volume, insulated against condensation, flushing throttle for adjustment of the flow rate, Scope of delivery, PE-wall-mounted toilet connection bend DN90/90, PE-wall-mounted toilet connection set DN90, wall-mounted toilet fastening set M12, mounting accessoires for lightweight construction, PE wall-mounted toilet reduction DN 90/110 for outlet bend , 2 cover caps, pre-installed toilet frame for wall-mounted toilet</p>  | 500 x 840 mm  | 11.900 kg | WD1017 |
| <p>Toilet-Frame, manual odor extraction self-supporting, for drywall construction , suitable for panelling with plasterboards, powder-coated frame, for WC ceramics with a projection of &lt;= 625 mm, adjustable feet 0–240 mm, SensoWash ready, mechanical front actuation, metre tear and center marker, tool-free assembly of the transparent service opening plate, Requirements of the leading standards of noise protection DIN 4109 and VDI 4100 can be achieved (in combination with noise reduction set # WD6015 000 000), with odor extraction with integrated radial fan, fan operation manual , airtight check valve, Cistern, concealed cistern CE tested in accordance with EN14055, maximum flush volume 9L, marking of filling height , Dual flush technology, adjustable flush volume, insulated against condensation, flushing throttle for adjustment of the flow rate, Scope of delivery, pre-installation kit including power supply 100–240 V AC / 24 V DC, PE-wall-mounted toilet connection bend DN90/90, PE-wall-mounted toilet connection set DN90, wall-mounted toilet fastening set M12, mounting accessoires for lightweight construction, mounting accessoires for single installation, PE wall-mounted toilet reduction DN 90/110 for outlet bend , 2 cover caps, pre-installed toilet frame for wall-mounted toilet</p> | 500 x 1148 mm |           | WD1012 |

**Actuator plate A1, for toilet, plastic # WD5001..1000 /**  
**WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000**  
**/ WD5001..1000**

|< 217 mm >|

Toilet frame, standard for drywall construction , self-supporting, suitable for panelling with plasterboards, powder-coated frame, for WC ceramics with a projection of <= 625 mm, adjustable feet 0–240 mm, SensoWash ready, mechanical front actuation, flattenings for optimal access of press tools, metre tear and center marker, tool-free assembly of the transparent service opening plate, Requirements of the leading standards of noise protection DIN 4109 and VDI 4100 can be achieved (in combination with noise reduction set # WD6015 000 000), Cistern, concealed cistern CE tested in accordance with EN14055, maximum flush volume 9L, marking of filling height , 500 x 1148 mm  
 Dual flush technology, adjustable flush volume, insulated against condensation, flushing throttle for adjustment of the flow rate, Scope of delivery, PE-wall-mounted toilet connection bend DN90/90, PE-wall-mounted toilet connection set DN90, wall-mounted toilet fastening set M12, mounting accessoires for lightweight construction, mounting accessoires for single installation, PE wall-mounted toilet reduction DN 90/110 for outlet bend , 2 cover caps, pre-installed toilet frame for wall-mounted toilet

WD1011

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*