

Uplighters

INGROUND260

arcluce-us.com  [inground](#)



DESCRIPTION

Luminaire

- Die-cast aluminium body (EN 47100).
- AISI 316L stainless steel trim.
- AISI 316L stainless steel counter-trim.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Reflector made of 99,85 anodized aluminium with satin or non-iridescent specular finishing.
- Screen made of 19/32" thermal-shock resistant tempered glass.
- 11000lb static load capacity.
- Can be driven over at maximum speed of 12 mph.

Electrical

- Nominal LED efficacy up to 155lm/W (4000K - 350mA - CRI>80 - Tj=100°C).
- LED life time: >50000h with L80.
- High colour consistency: <3 SDCM.
- Available with conventional lamps.
- Integral LED driver. Available with DALI and 0-10V dimming options.
- Driver protected against voltage spikes.

Installation

- Recessed installation.
- Double PG16 cable gland for through wiring.
- Supplied with recessed installation box.
- Supplied with power cable (2').
- Recessed installation box made of engineering plastic.

Fixtures with stainless steel trim are suggested for walk-over or drive-over applications. Fixtures can be supplied with anti-slip glass upon request.

TECHNICAL INFORMATION

Luminaire power:	15W
Source lumen:	Up to 1850lm
LED:	3000K - 4000K, CRI>80



INGROUND260

30


Family	Model	Size	Trim type	Optics	CCT	Fixture color	Wiring
0- Ground recessed	IG Inground	7 10"	1 Stainless steel round	2 Flood	3 3000K	US- 30 Stainless steel	R 120-277V 60Hz / DALI
			2 Stainless steel round flush	3 Ultra-wide flood	4 4000K		S 120-277V 60Hz / 0-10V
			3 Stainless steel squared				



Trim type


<p>1</p> <p>Weight: 15.43 lb</p> <p>AISI 316L stainless steel round trim</p>	<p>2</p> <p>Weight: 16.89 lb</p> <p>AISI 316L stainless steel round flush trim</p>	<p>3</p> <p>Weight: 16.62 lb</p> <p>AISI 316L stainless steel squared trim</p>
---	---	---

Optics

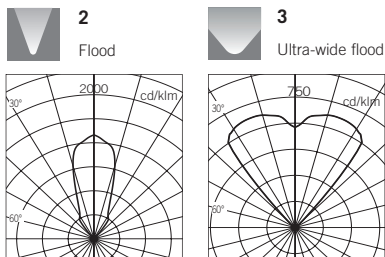

Accessories

It is possible to purchase the recessed box separately, whenever it is necessary to start the installation in advance. The item can be ordered at a later time, and it will be supplied complete with recessed box (to be removed if purchased separately in advance).



For articles code: **0-IG71**,
0-IG73

Thermoplastic material
recessed installation box.

Suitable for articles with
AISI 316L stainless steel
ring.

Code	lb
1099211X	2.20



For articles code: **0-IG72**

Thermoplastic material
recessed installation box.

Suitable for articles with
AISI 316L stainless steel
ring and counter-ring.

Code	lb
1099224X	3.53



Directional louvre for glare
control.

It allows the light flux
orientation preventing
light dispersion in the
surrounding areas and
limiting light pollution.

Code	lb
1099110X+12	0.23



Glare-control louvre.

It allows the light flux
orientation and prevents
light dispersion and glare
effects.

Code	lb
1099108X+12	0.18



To order with the light
fitting.

Anti-slip opal glass.

Code	lb
1099283X	3.60



Lens for elliptic beam

Code	lb
1099253X	0.60