

Uplighters

# INGROUND55

arcluce-us.com  inground



## DESCRIPTION

### Luminaire

- AISI 316L stainless steel body and trim.
- Silicone rubber gaskets.
- PMMA lenses for LEDs.
- Screen made of 3/16" thermal-shock resistant tempered glass.
- 2200 lb static load capacity.
- Can be walked over.

### Electrical

- Nominal LED efficacy up to 162lm/W (4000K - 350mA - CRI>70 - Tj=100°C).
- LED life time: >50000h with L80.
- LED driver not included.

### Installation

- Recessed installation.
- Supplied with recessed installation box.
- Supplied with power cable (10').
- Recessed installation box made of engineering plastic or of AISI 316L stainless steel.

**Aisi 316L stainless steel fixtures suitable for submerged installations at a maximum depth of 3'.**

**2700K on request.**

## TECHNICAL INFORMATION

<b>Luminaire power:</b>	4W
<b>Source lumen:</b>	Up to 560lm
<b>LED:</b>	3000K - 4000K, CRI>70




# INGROUND<sup>55</sup>

30


Family	Model	Size	Trim type	Optics	CCT	Fixture color	Wiring
0- Ground recessed	IG Inground	1 2"	1 Stainless steel round	2 Medium	3 3000K	US- 30 Stainless steel	I ICC350mA
			2 Stainless steel round flush	4 Wide flood	4 4000K		
				6 Elliptical			



## Trim type

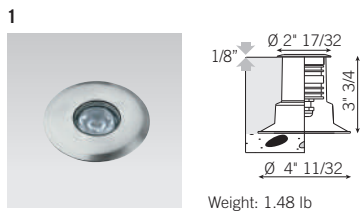


AISI 316L stainless steel round trim

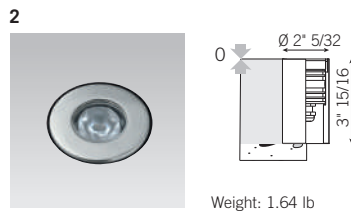


AISI 316L stainless steel round flush trim

## Optics

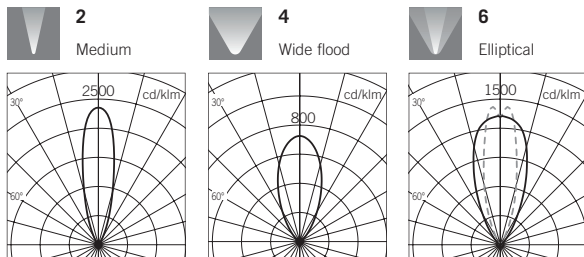


## Accessories

It is possible to purchase the recessed box separately, whenever it is necessary to start the installation in advance. The item can be ordered later on, and it will be supplied complete with recessed box (to be removed if purchased separately in advance).

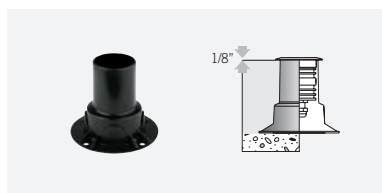


Code	lb
1099227X	0.18

Thermoplastic material recessed installation box.

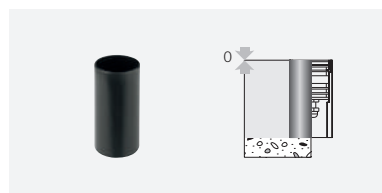

Code	lb
1099226X	0.13

Thermoplastic material recessed installation box.

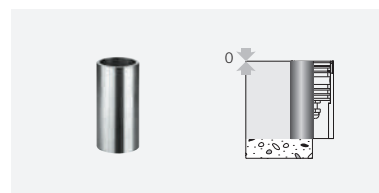

Code	lb
1099225X	1.32

Stainless steel AISI 316L recessed installation box.



