

Step lights

THUNDER²⁵

arcluce-us.com 🔍 thunder



DESCRIPTION

Luminaire

- AISI 316L stainless steel body and trim.
- Silicone rubber gaskets.
- PMMA lenses for LEDs.
- Clear PMMA screen.

Electrical

- Nominal LED efficacy up to 133lumen/Watt (4000K - 350mA - CRI>80 - Tj=100°C).
- LED life time: >50000h with L80.
- High colour consistency: <3 SDCM.
- LED driver not included.


Installation

- Recessed installation.
- Supplied with power cable (10').
- Recessed installation box made of engineering plastic or of AISI 316L stainless steel.

Amber color LED on request.

TECHNICAL INFORMATION

| | |
|-------------------------|-----------------------|
| Luminaire power: | 1W - 2W |
| Source lumen: | Up to 240lm |
| LED: | 3000K - 4000K, CRI>80 |

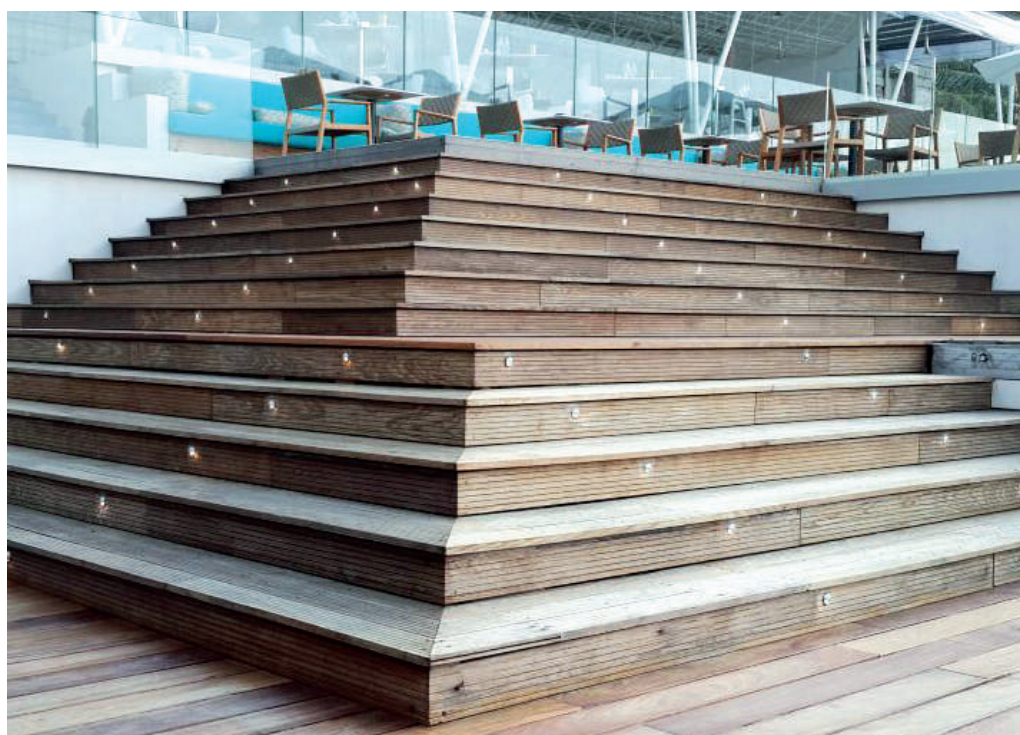


THUNDER²⁵



| Family | Model | Size | Trim type | Optics | CCT | Fixture color | Wiring |
|------------------|------------|------|-------------------------------|-----------|---------|------------------------|-------------|
| Q- Wall recessed | TH Thunder | 0 1" | 1 Stainless steel round | 2 Medium | 3 3000K | US- 30 Stainless steel | I ICC 350mA |
| | | | 2 Stainless steel round flush | | 4 4000K | | |
| | | | 6 Stainless steel bulging | 0 Radial | 3 3000K | US- 30 Stainless steel | K ICC 700mA |
| | | | | 1 One way | 4 4000K | | |
| | | | | 2 Two way | | | |




Trim type

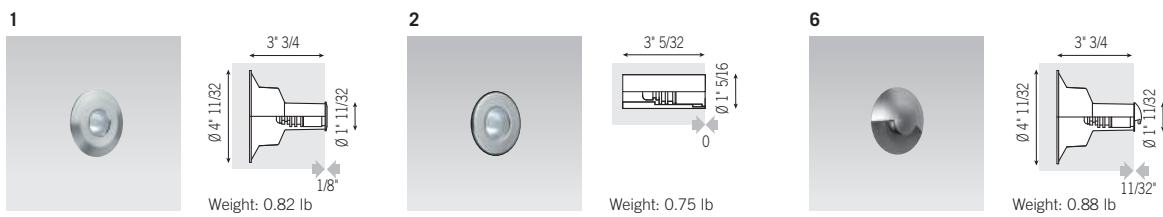


AISI 316L stainless steel frame

Optics

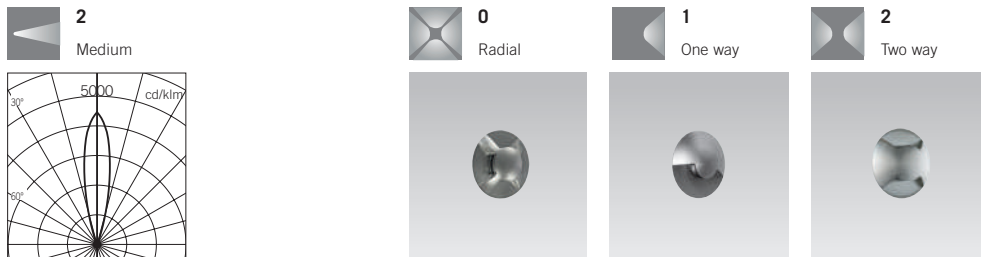


Accessories

It is possible to purchase the recessed box separately, whenever it is necessary to start the installation in advance. The item can be ordered at a later time, and it will be supplied complete with recessed box (to be removed if purchased separately in advance).

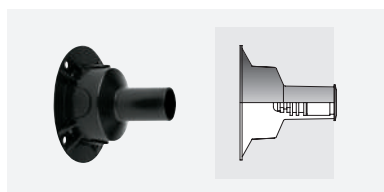


| Code | lb |
|----------|------|
| 1099223X | 0.13 |

Thermoplastic material recessed installation box.

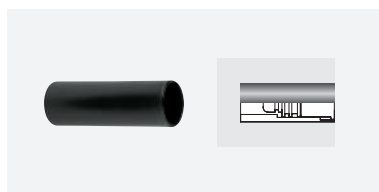

| Code | lb |
|----------|------|
| 1099222X | 0.04 |

Thermoplastic material recessed installation box.

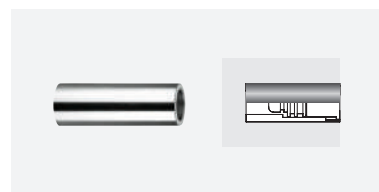

| Code | lb |
|----------|------|
| 1099221X | 0.46 |

Stainless steel AISI 316L recessed installation box.

