

Outdoor floodlights

TITO25

arcluce-us.com 🔍 tito



DESCRIPTION

Luminaire

- AISI 316L stainless steel body and trim.
- Silicone rubber gaskets.
- PMMA lenses for LEDs.
- Clear PMMA screen.

Electrical

- Nominal LED efficacy up to 119lumen/Watt (4000K - 700mA - CRI>80 - Tj=100°C).
- LED life time: >50000h with L80.
- High colour consistency: <3 SDCM.
- LED driver not included.

Installation

- AISI 316L stainless steel support bracket.
- Supplied with power cable (10').

AISI 316L stainless steel fixtures suitable for submerged installations at a maximum depth of 3'.

**Amber color LED on request.
2700K on request.**

TECHNICAL INFORMATION


Luminaire power:	2W
Source lumen:	Up to 240lm
LED:	3000K - 4000K, CRI>80



TITO25




Family	Model	Size	Yoke	Optics	CCT	Fixture color	Wiring
W- Floodlight	TT Tito	0 1"	0 Standard bracket	2 Medium	3 3000K	US- 30 Stainless steel	K ICC 700mA
				4 Wide flood	4 4000K		
				6 Elliptical			




Weight: 1.1 lb

Optics

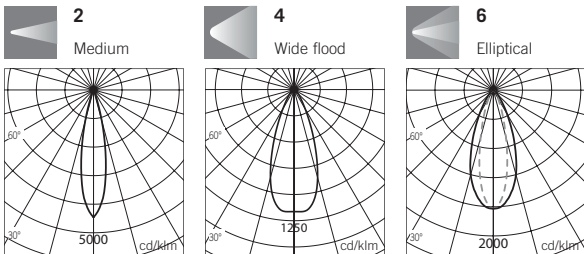

Accessories

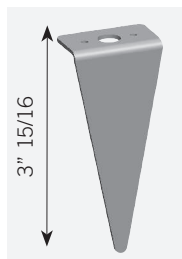

Code	lb
1099256X+30	1.77

AISI 316L stainless steel peg.



Code	lb
1099257X+12	0.08

Thermoplastic material peg.



Code	lb
1099376X+30	0,11

Polished or powder coated AISI 316L stainless steel visor.



Code	lb
1099340X+12	0,11



