

LUNIO7

arcluce.it  lunio7





Predisposto per controllo via BLE, per dettagli contattare l'azienda.

Suitable for BLE control device, for details consult the factory.

APPARECCHIO

- Corpo in alluminio pressofuso (EN 47100).
- Verniciatura a polvere poliestere in doppio strato stabilizzata ai raggi UV, resistente alla corrosione e alle nebbie saline.
- Guarnizioni in gomma siliconica.
- Viteria esterna in acciaio inox AISI 316.
- Cablaggio su piastra asportabile in acciaio zincato.
- Sezionatore che disinserisce automaticamente la linea di alimentazione all'apertura del corpo.
- Driver con protezione alle sovra-tensioni di rete sino a 4kV.
- Lenti LED in PMMA.
- Schermo in vetro temperato di spessore 4mm resistente agli shock termici.
- Apparecchio costruito in conformità alle norme EN 60598-1 e EN 60598-2-3.

SORGENTE

- LED con efficienza nominale sino a 139lumen/Watt (4000K - 500mA - CRI>70 - Tj=85°C).
- Lunga vita utile del LED: > 50000h con L80.
- Alta consistenza dei colori: <3 SDCM.
- Modulo LED protetto contro le sovratemperature.

INSTALLAZIONE

- Installazione a testa-palo.
- Fornito completo di cavo con connettore presa-spina IP66 con ghiera di bloccaggio per cavi da 9 a 12mm (0,15m).

Questi apparecchi sono predisposti per i moderni sistemi di controllo. Per le diverse possibilità vedi la sezione "Controllo della luce".

LUMINAIRE

- Die-cast aluminium body (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Wiring on removable galvanized steel tray.
- Knife-switch for automatic power disconnection when opened.
- Driver protected against voltage surges up to 4kV.
- PMMA lenses for LEDs.
- Screen made of 4mm thermal-shock resistant tempered glass.
- It complies with standards EN 60598-1 and EN 60598-2-3.


SOURCE

- Nominal LED efficacy up to 139lumen/Watt (4000K - 500mA - CRI>70 - Tj=85°C).
- LED life time: >50000h with L80.
- High colour consistency: <3 SDCM.
- LED module protected against overheating.

INSTALLATION

- Post-top installation.
- Supplied with power cable ended by IP66 socket-plug connector with locking ring for cables of diameter 9-12mm (0,15m).

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

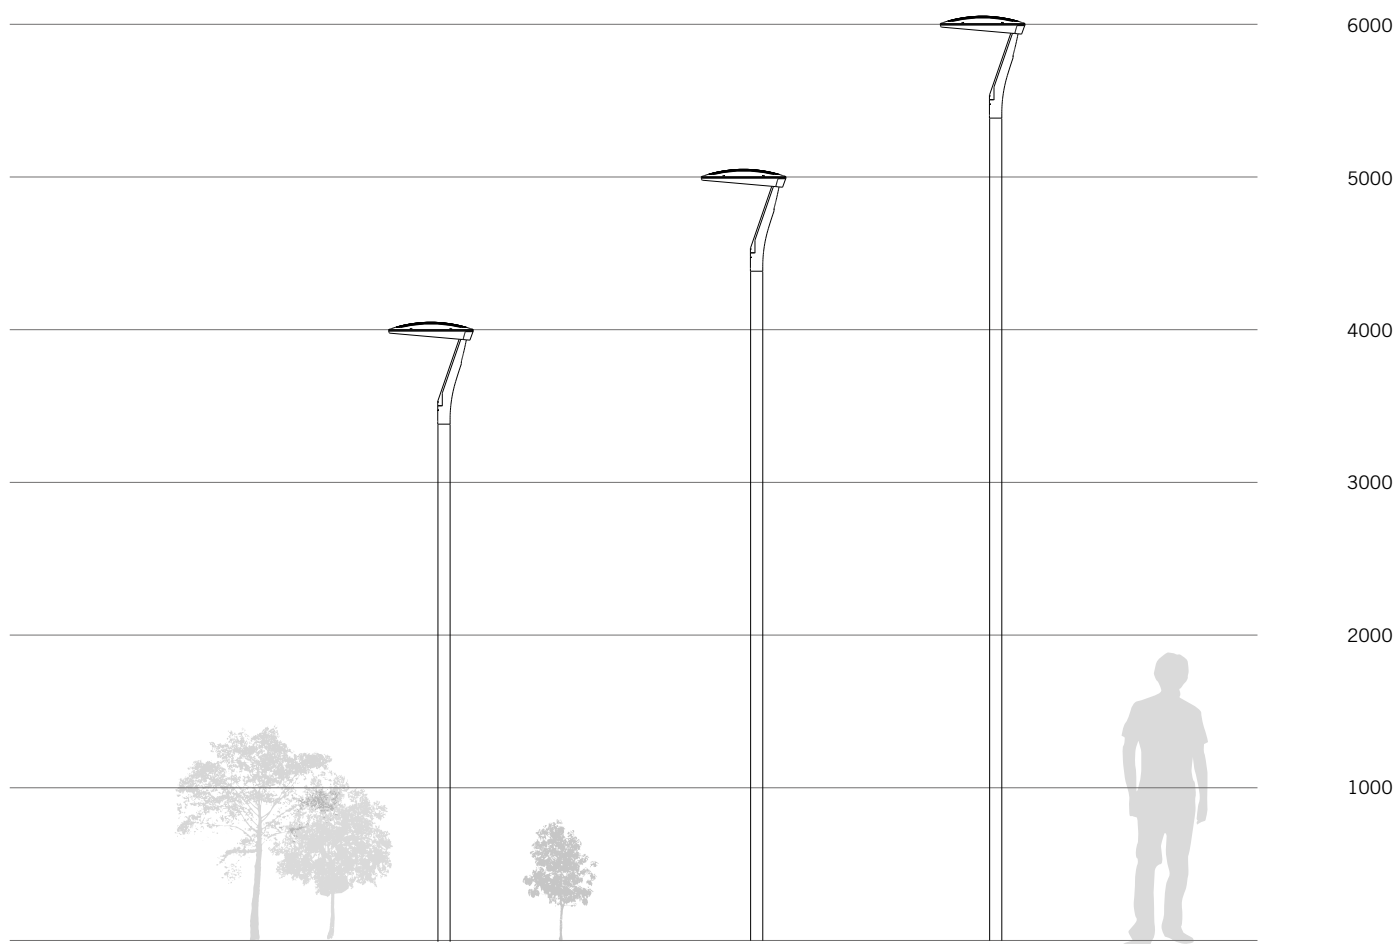


LUNIO7

Optica arredo urbano radiale - Radial urban lighting

arcluce.it lunio7

☐ 12
 ☐ 16
 ☐ 21




Code	WATT	CEI	DALI	BIP	Source lumen	Luminaire lumen	K	CRI	Class
T7697	28W LED	•	•	•	3850	2250	3000	70	□
T7698	28W LED	•	•	•	4150	2550	4000	70	□
T7699	28W LED	•	•	•	4150	2550	5000	70	□
T7700	51W LED	•	•	•	6050	3550	3000	70	□
T7701	51W LED	•	•	•	6550	3950	4000	70	□
T7702	51W LED	•	•	•	6550	3950	5000	70	□
T7703	78W LED	•	•	•	10000	6250	3000	70	□
T7704	78W LED	•	•	•	10800	7000	4000	70	□
T7705	78W LED	•	•	•	10800	7000	5000	70	□

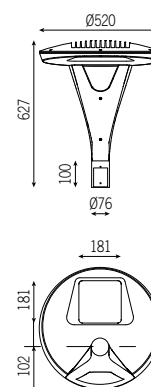

Optica stradale - Street lighting

☐ 12
 ☐ 16
 ☐ 21


Code	WATT	CEI	DALI	BIP	Source lumen	Luminaire lumen	K	CRI	Class
T7707	28W LED	•	•	•	3850	2400	3000	70	□
T7708	28W LED	•	•	•	4150	2700	4000	70	□
T7709	28W LED	•	•	•	4150	2700	5000	70	□
T7710	51W LED	•	•	•	6050	3750	3000	70	□
T7711	51W LED	•	•	•	6550	4200	4000	70	□
T7712	51W LED	•	•	•	6550	4200	5000	70	□
T7713	78W LED	•	•	•	10000	6550	3000	70	□
T7714	78W LED	•	•	•	10800	7300	4000	70	□
T7715	78W LED	•	•	•	10800	7300	5000	70	□

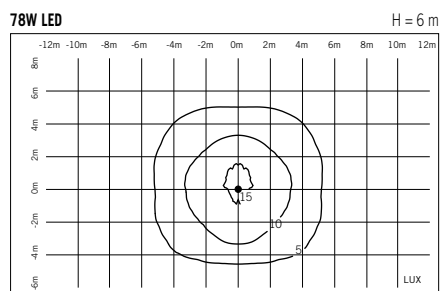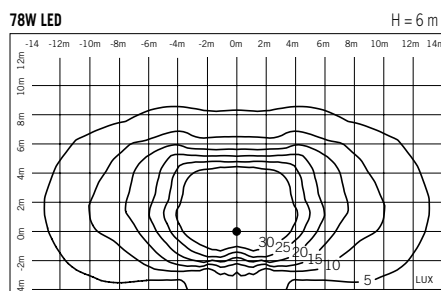
Optica arredo urbano radiale
Radial urban lightingOptica stradale
Street lighting

LUNIO7

Accessori - Accessories


 12  16  21

Pali cilindrici Ø 76 mm con riduzione Ø 60 mm
Ø 76 mm poles with Ø 60 mm spigots

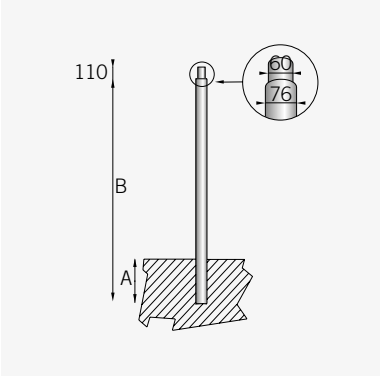

Code	A (cm)	B (cm)	Kg
S9014	50	350	18,00
S9015	50	400	20,00
S9016	50	450	22,00

Palo cilindrico Ø 76 mm con riduzione Ø 60 mm in acciaio zincato completo di finestra di ispezione e morsetteria con portafusibile.
Cylindrical galvanized steel pole with inspection slit and terminal board with fuse carrier Ø 76 mm with Ø 60 mm reduction.

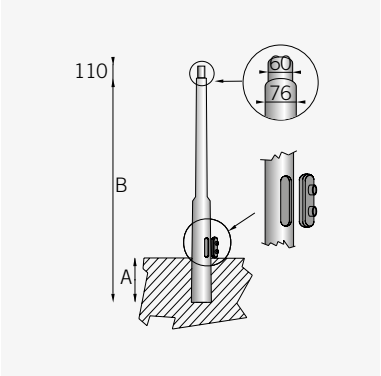

Code	A (cm)	B (cm)	Kg
S9017	50	500	41,00
S9018	50	550	44,00
S9019	50	600	46,00

Palo cilindrico rastremato Ø 76 mm con riduzione Ø 60 mm in acciaio zincato completo di finestra d'ispezione e morsetteria con portafusibile.
Cylindrical tapered galvanized steel pole with inspection slit and terminal board with fuse carrier Ø 76 mm with Ø 60 mm reduction.

