

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

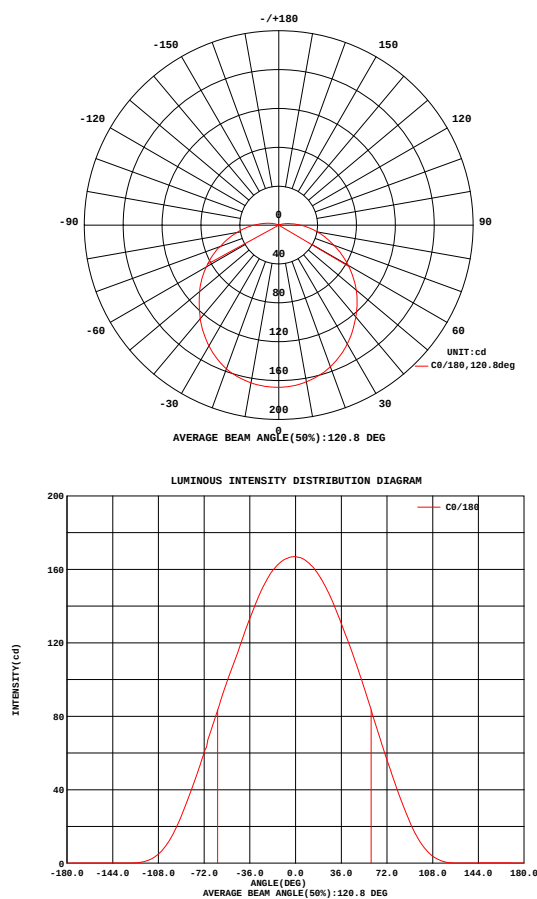


Fig. C0/C180

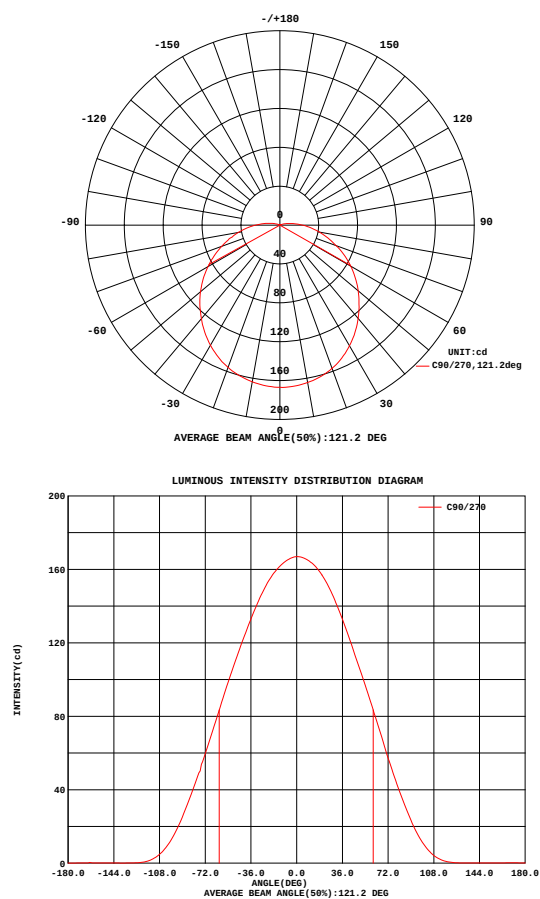


Fig. C90/C270

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2018-11-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.584m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	287.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	190.3V x 180.0H
	At 50% of Imax	121.1V x 120.8H
	At 90% of Imax	49.9V x 49.5H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	971.7 lumens per klm.
	To 50% of Imax	677.9 lumens per klm.
	To 90% of Imax	160.1 lumens per klm.

Upward LOR	4.8 %
Downward LOR	95.2 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2018-11-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.584m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: 350圆形LED蓝牙高杆太阳能灯	TYPE: 6910802335	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2018110601
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

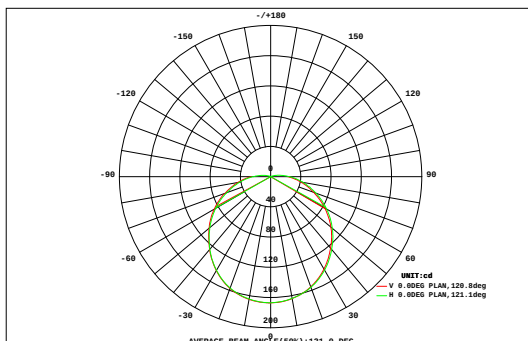

DATA OF LAMP		Eff: 74.35lm/W	
MODEL	Lextar2835 300K	Imax(cd)	167.1
NOMINAL POWER(W)	7.8	AVAILABILITY(%)	97.2
RATED VOLTAGE(V)	230	Avai. FLUX(lm)	564.3
NOMINAL FLUX(lm)	580.858	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	580.9
TEST VOLTAGE(V)	230.2	θ @50%(H,V)	121,121DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		Φ t	Φ a
	0.07	0.23	0.39	0.55	0.69	0.80	0.89	0.96	1.00	1.00	0.95	0.87	0.75	0.61	0.46	0.32	0.19	0.06	10.8	10.8
90	0.07	0.23	0.39	0.55	0.69	0.80	0.89	0.96	1.00	1.00	0.95	0.87	0.75	0.61	0.46	0.32	0.19	0.06	10.8	10.8
80	0.08	0.27	0.49	0.74	0.97	1.19	1.36	1.50	1.57	1.58	1.50	1.34	1.13	0.88	0.63	0.40	0.22	0.07	15.9	15.9
70	0.08	0.31	0.59	0.94	1.27	1.63	1.91	2.14	2.24	2.22	2.09	1.84	1.54	1.16	0.82	0.50	0.25	0.07	21.6	21.6
60	0.09	0.34	0.69	1.13	1.59	2.07	2.46	2.77	2.90	2.87	2.69	2.36	1.96	1.47	1.01	0.59	0.29	0.08	27.4	27.4
50	0.09	0.38	0.78	1.31	1.88	2.46	2.96	3.33	3.51	3.48	3.26	2.86	2.35	1.77	1.20	0.68	0.32	0.08	32.7	32.7
40	0.10	0.41	0.86	1.45	2.12	2.78	3.38	3.82	4.05	4.03	3.77	3.31	2.70	2.04	1.35	0.77	0.35	0.08	37.4	37.4
30	0.10	0.42	0.93	1.57	2.29	3.05	3.73	4.24	4.51	4.49	4.20	3.66	2.99	2.23	1.49	0.85	0.38	0.09	41.2	41.2
20	0.10	0.43	0.97	1.66	2.43	3.24	4.00	4.55	4.83	4.81	4.50	3.93	3.18	2.37	1.59	0.90	0.39	0.09	44.0	44.0
10	0.10	0.43	0.98	1.69	2.50	3.36	4.14	4.72	5.00	4.98	4.67	4.07	3.29	2.45	1.63	0.92	0.40	0.09	45.4	45.4
0	0.10	0.43	0.97	1.69	2.49	3.36	4.16	4.74	5.02	5.00	4.68	4.07	3.27	2.43	1.62	0.92	0.40	0.09	45.4	45.4
-10	0.10	0.42	0.95	1.65	2.44	3.27	4.04	4.59	4.87	4.85	4.53	3.93	3.16	2.35	1.57	0.89	0.39	0.09	44.1	44.1
-20	0.10	0.40	0.90	1.57	2.31	3.06	3.77	4.29	4.55	4.53	4.23	3.67	2.95	2.22	1.49	0.84	0.37	0.09	41.3	41.3
-30	0.09	0.38	0.84	1.45	2.11	2.78	3.38	3.84	4.08	4.06	3.78	3.28	2.68	2.02	1.37	0.79	0.35	0.08	37.4	37.4
-40	0.09	0.35	0.76	1.28	1.86	2.43	2.93	3.30	3.50	3.48	3.25	2.87	2.35	1.79	1.21	0.72	0.32	0.08	32.6	32.6
-50	0.08	0.32	0.67	1.08	1.58	2.03	2.44	2.72	2.88	2.87	2.69	2.39	1.96	1.51	1.03	0.63	0.30	0.07	27.3	27.3
-60	0.08	0.29	0.56	0.88	1.27	1.61	1.92	2.12	2.23	2.22	2.07	1.85	1.53	1.20	0.84	0.54	0.26	0.07	21.6	21.6
-70	0.07	0.25	0.46	0.70	0.96	1.20	1.41	1.53	1.59	1.56	1.46	1.31	1.12	0.90	0.66	0.44	0.23	0.06	15.9	15.9
-80	0.07	0.22	0.37	0.53	0.68	0.82	0.93	0.99	1.01	0.99	0.93	0.85	0.74	0.62	0.48	0.34	0.19	0.06	10.8	10.8
-90	0.07	0.22	0.37	0.53	0.68	0.82	0.93	0.99	1.01	0.99	0.93	0.85	0.74	0.62	0.48	0.34	0.19	0.06	10.8	10.8
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	1.60	6.29	13.2	21.9	31.4	41.1	49.8	56.2	59.3	59.0	55.3	48.5	39.7	30.0	20.5	12.0	5.61	1.40	553	---
Φ a	1.60	6.29	13.2	21.9	31.4	41.1	49.8	56.2	59.3	59.0	55.3	48.5	39.7	30.0	20.5	12.0	5.61	1.40	---	553

one-half-peak spread: U:60.2,D:61.7 , L:60.7,R:58.9


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2018-11-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.584m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 350圆形LED蓝牙高杆太阳能灯	TYPE: 6910802335	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2018110601
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

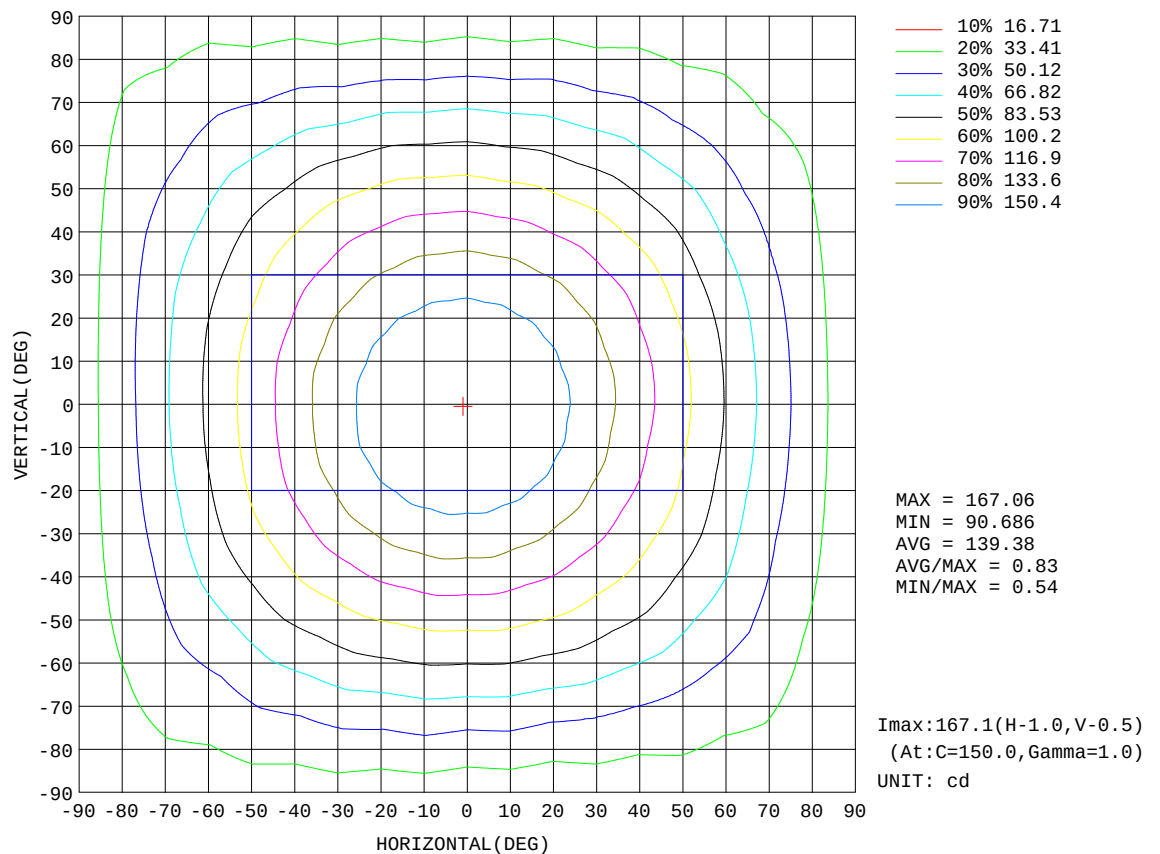


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: YT
Test Date: 2018-11-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity: 65.0%
Test Distance: 1.584m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: 350圆形LED蓝牙高杆太阳能灯	TYPE: 6910802335	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2018110601
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

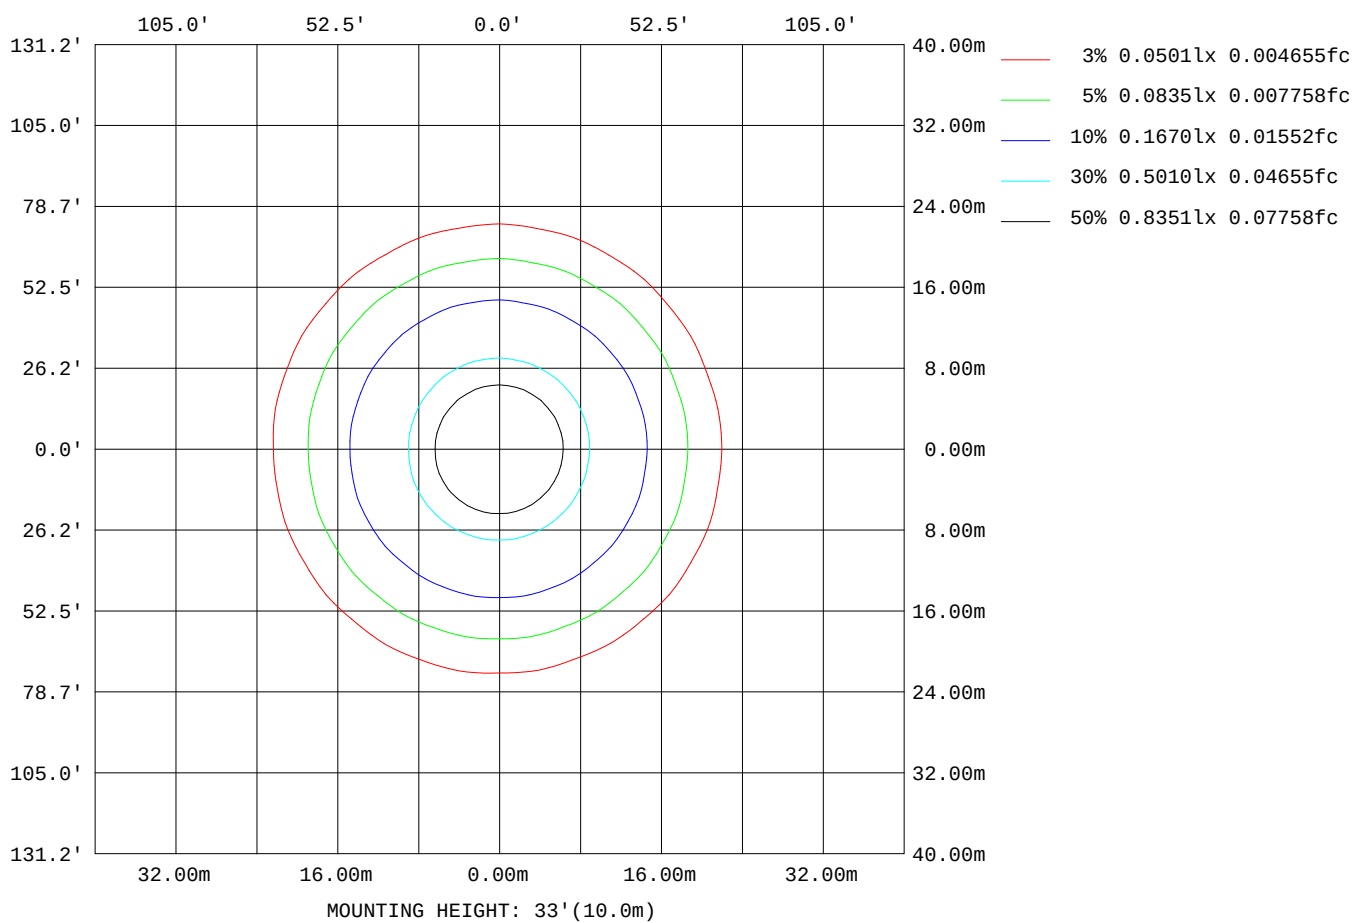


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: YT
Test Date: 2018-11-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity: 65.0%
Test Distance: 1.584m [K=1.0000]
Remarks:

AAI Figure

NAME: 350圆形LED蓝牙高杆太阳能灯	TYPE: 6910802335	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2018110601
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

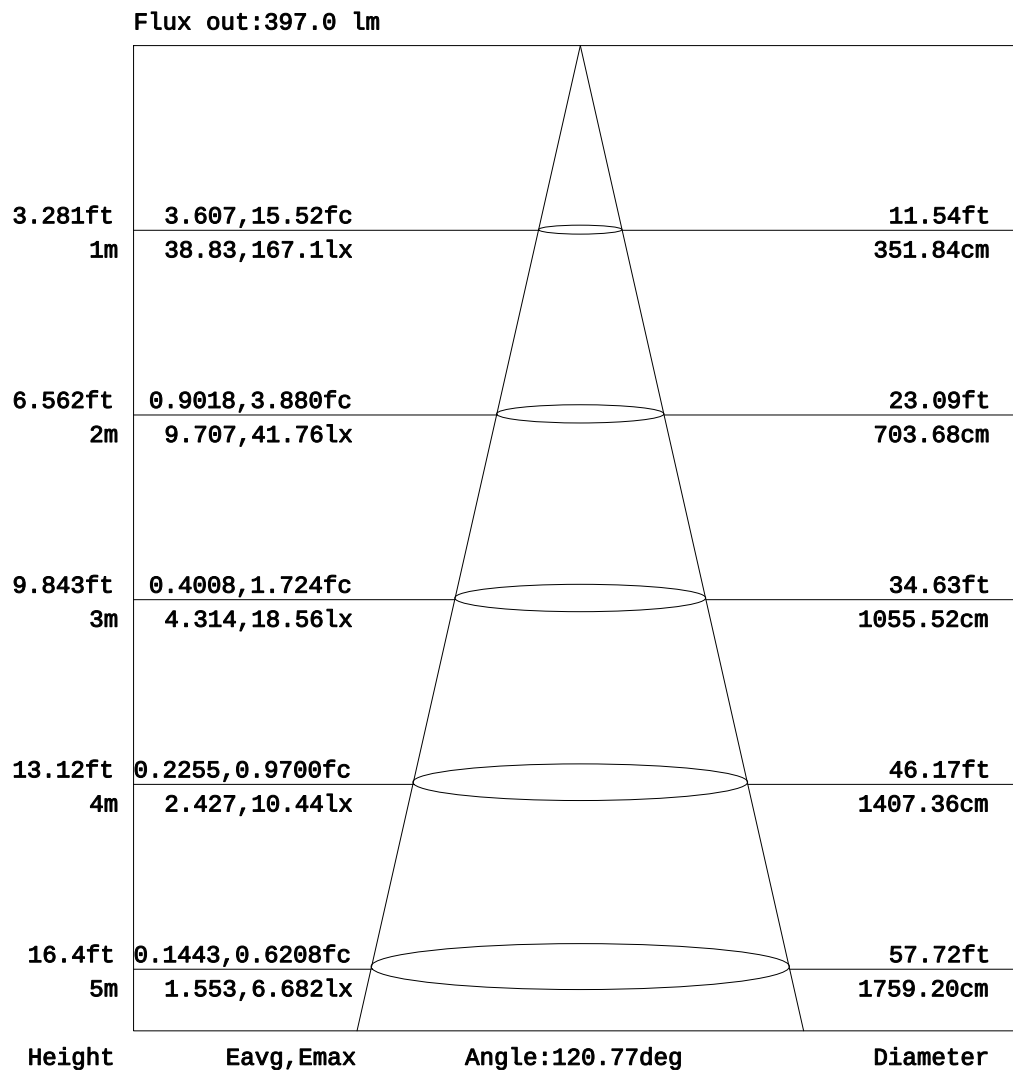


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: YT
Test Date: 2018-11-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity: 65.0%
Test Distance: 1.584m [K=1.0000]
Remarks:

Planar Illuminance Curve

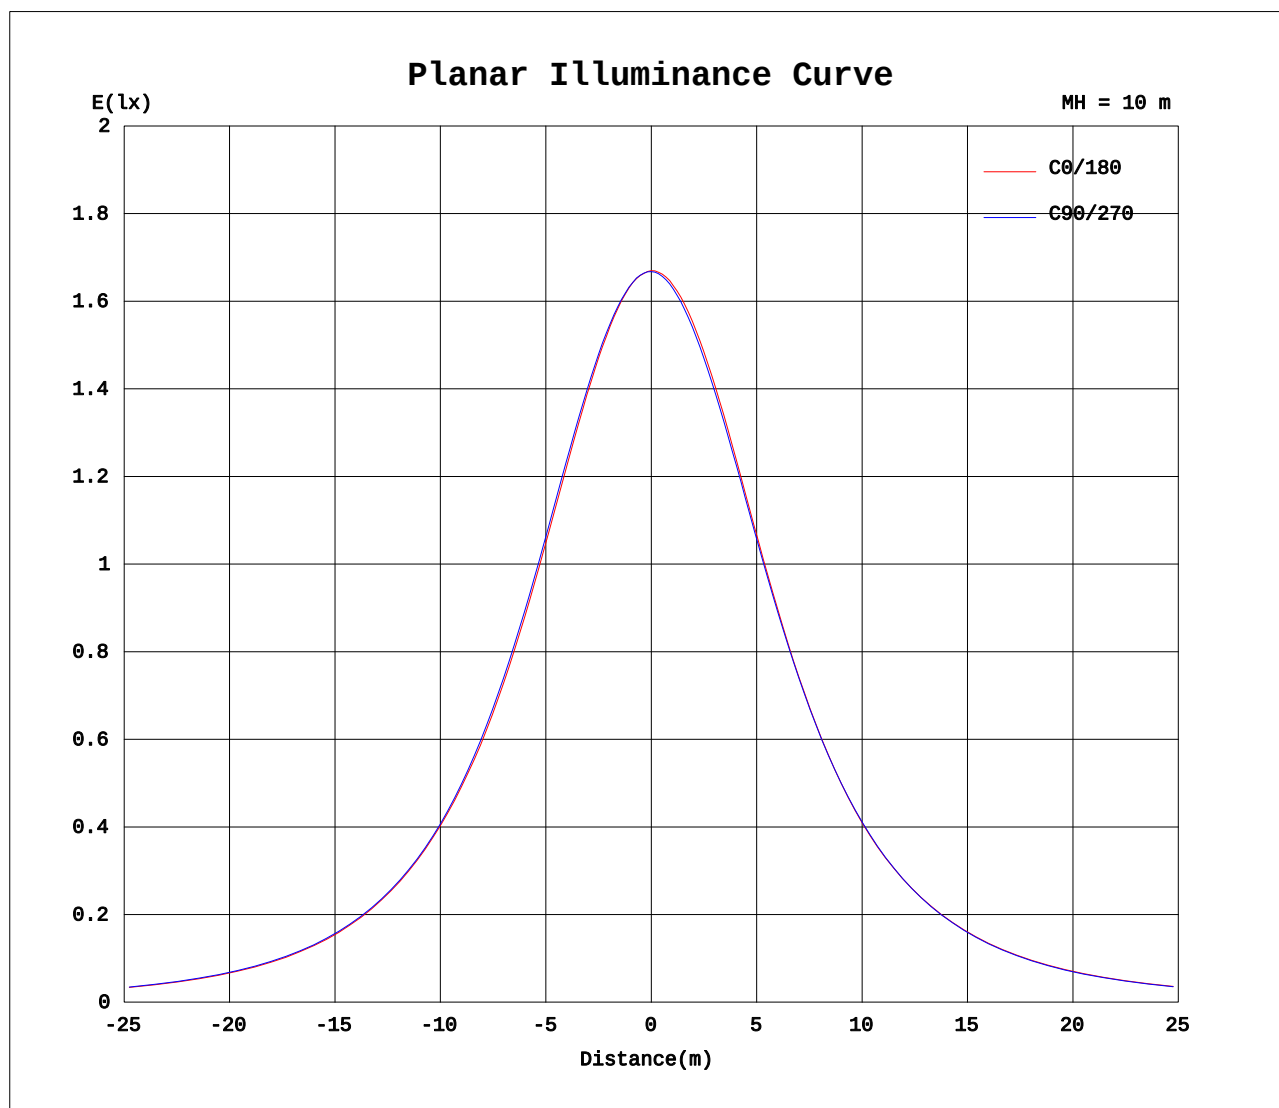

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2018-11-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.584m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 350圆形LED蓝牙高杆太阳能灯	TYPE: 6910802335	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2018110601
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	25.6	17.9	11.6	7.02	3.85	1.84	0.76	0.25	0.14	0.11	0.12	0.14	0.12	0.13	0.14	0.14	0.13	0.10	0.09
-170	25.6	18.0	11.9	7.42	4.28	2.20	1.00	0.36	0.16	0.11	0.12	0.14	0.14	0.14	0.16	0.16	0.16	0.18	0.19
-160	25.6	18.3	12.5	8.19	5.06	2.87	1.49	0.70	0.28	0.13	0.10	0.11	0.13	0.13	0.14	0.15	0.14	0.15	0.16
-150	25.6	18.9	13.4	9.34	6.27	4.06	2.47	1.41	0.63	0.22	0.12	0.10	0.11	0.11	0.12	0.13	0.13	0.14	0.14
-140	25.6	19.6	14.7	10.9	8.11	5.89	4.09	2.36	1.25	0.63	0.30	0.15	0.10	0.10	0.10	0.10	0.11	0.11	0.11
-130	25.6	20.5	16.2	13.0	10.5	8.48	5.99	3.98	2.65	1.78	1.07	0.53	0.28	0.20	0.17	0.15	0.15	0.15	0.14
-120	25.6	21.5	18.1	15.6	13.6	11.4	8.81	6.80	5.45	4.20	2.73	1.69	1.20	0.83	0.59	0.56	0.62	0.64	0.66
-110	25.6	22.7	20.2	18.7	17.4	15.2	12.8	11.2	10.1	8.31	6.42	5.35	4.70	3.80	2.95	2.95	3.21	3.21	3.26
-100	25.6	24.0	22.5	22.1	21.7	19.9	18.1	17.5	16.9	15.2	13.4	13.2	13.1	11.8	10.6	10.9	11.3	10.8	10.4
-90	25.6	25.4	25.2	25.9	26.5	25.6	24.6	25.4	26.2	25.4	24.6	25.5	26.4	25.4	24.4	25.1	25.8	24.6	23.4
-80	25.6	26.8	28.0	29.9	31.8	32.2	32.5	34.8	37.3	37.8	38.1	40.2	42.3	42.1	41.6	42.7	43.8	42.6	41.1
-70	25.6	28.2	30.8	34.0	37.5	39.8	41.7	45.1	49.2	51.7	53.3	55.9	58.9	60.1	60.4	61.8	63.4	62.8	61.6
-60	25.6	29.6	33.5	38.1	43.3	47.9	51.5	55.6	61.3	66.3	69.8	73.0	76.6	79.4	81.1	82.6	84.3	84.6	84.0
-50	25.6	30.9	36.1	42.1	48.8	55.7	61.3	67.1	73.9	80.2	85.6	89.7	93.9	98.0	101	102	105	106	105
-40	25.6	32.0	38.6	45.6	53.6	62.0	70.5	78.0	85.3	92.6	99.5	105	110	115	119	122	124	126	125
-30	25.6	32.9	40.7	48.8	57.4	67.5	77.2	86.8	95.3	103	110	118	125	130	135	139	142	144	143
-20	25.6	33.7	42.3	51.4	61.0	71.7	82.0	92.2	102	111	119	128	135	143	148	152	155	157	157
-10	25.6	34.1	43.3	53.1	62.9	74.5	85.1	95.6	105	115	124	134	143	150	156	160	163	164	164
0	25.6	34.4	43.8	53.8	63.3	75.6	86.2	96.8	106	116	126	135	144	151	158	162	165	167	167
10	25.6	34.5	44.0	54.1	64.1	75.5	85.9	96.2	106	115	125	133	141	148	154	159	162	163	164
20	25.6	34.3	43.6	53.6	63.5	73.7	83.3	92.6	101	109	118	127	135	141	146	151	153	155	156
30	25.6	33.8	42.6	52.1	61.1	69.6	78.1	86.5	94.9	103	110	117	123	129	134	137	141	142	143
40	25.6	33.1	41.1	49.3	56.3	63.6	71.3	79.2	86.9	93.6	99.6	106	111	116	119	122	124	125	126
50	25.6	32.1	39.1	45.5	51.0	56.4	63.3	70.1	75.8	80.6	85.9	91.3	95.6	98.8	102	105	105	106	107
60	25.6	31.0	36.6	41.1	44.9	49.4	54.9	59.5	62.6	66.3	70.9	74.6	77.0	79.4	82.2	83.8	84.2	84.9	85.5
70	25.6	29.6	33.9	36.3	38.6	42.1	46.0	48.1	49.5	52.2	55.0	56.4	56.9	58.9	61.3	61.7	61.3	62.6	63.6
80	25.6	28.2	30.9	31.6	32.1	34.4	36.8	37.0	36.9	38.4	40.1	39.7	38.9	40.3	41.8	41.3	40.6	42.0	43.3
90	25.6	26.7	27.9	26.9	25.9	26.8	27.7	26.5	25.3	25.9	26.5	25.4	24.3	25.0	25.7	24.6	23.6	24.4	25.1
100	25.6	25.3	24.8	22.5	20.2	19.7	19.3	17.4	15.6	15.4	15.5	14.5	13.5	13.5	13.7	12.6	11.4	11.3	11.3
110	25.6	23.8	21.9	18.6	15.3	13.5	12.2	10.3	8.51	7.77	7.59	6.93	6.11	5.77	5.68	4.96	4.15	3.85	3.68
120	25.6	22.5	19.3	15.4	11.4	8.64	6.93	5.41	3.97	3.10	2.88	2.59	1.99	1.61	1.48	1.23	0.88	0.73	0.67
130	25.6	21.2	17.0	12.8	8.57	5.26	3.54	2.38	1.51	0.92	0.68	0.57	0.39	0.26	0.21	0.20	0.15	0.14	0.14
140	25.6	20.2	15.2	10.7	6.55	3.53	1.63	0.87	0.46	0.27	0.16	0.12	0.10	0.10	0.10	0.10	0.09	0.09	0.09
150	25.6	19.3	13.7	9.04	5.33	2.60	1.06	0.35	0.21	0.14	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.10	0.10
160	25.6	18.6	12.6	7.86	4.40	2.13	0.87	0.31	0.16	0.12	0.12	0.12	0.12	0.13	0.14	0.13	0.12	0.15	0.13
170	25.6	18.1	11.9	7.24	3.94	1.85	0.75	0.26	0.15	0.12	0.12	0.13	0.39	0.14	0.14	0.12	0.13	0.11	0.10
180	25.6	17.9	11.6	7.02	3.85	1.84	0.76	0.25	0.14	0.11	0.12	0.14	0.12	0.13	0.14	0.14	0.13	0.10	0.09

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: YT
 Test Date: 2018-11-06

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
 Humidity: 65.0%
 Test Distance: 1.584m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 350圆形LED蓝牙高杆太阳能灯	TYPE: 6910802335	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2018110601
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.13	0.18	0.18	0.20	0.19	0.18	0.17	0.16	0.15	0.14	0.15	0.40	1.27	2.94	5.65	9.69	15.3	22.5	
-170	0.18	0.18	0.18	0.18	0.18	0.43	0.16	0.16	0.15	0.13	0.14	0.32	1.08	2.68	5.41	9.55	15.3	22.5	
-160	0.17	0.18	0.19	0.18	0.18	0.18	0.16	0.14	0.13	0.12	0.14	0.29	1.03	2.65	5.48	9.72	15.4	22.5	
-150	0.15	0.15	0.15	0.16	0.17	0.16	0.15	0.15	0.13	0.12	0.37	0.53	1.41	2.96	5.91	10.2	15.8	22.5	
-140	0.11	0.12	0.13	0.14	0.14	0.14	0.13	0.13	0.15	0.23	0.47	1.09	2.31	4.18	6.78	11.1	16.4	22.5	
-130	0.15	0.16	0.16	0.19	0.26	0.29	0.36	0.55	0.73	0.89	1.25	2.33	4.08	6.13	8.63	12.3	17.1	22.5	
-120	0.86	1.04	1.07	1.24	1.58	1.74	1.78	2.11	2.64	2.98	3.36	4.67	6.76	9.00	11.2	14.0	18.1	22.5	
-110	3.89	4.52	4.52	4.69	5.33	5.82	5.70	5.85	6.57	7.25	7.59	8.51	10.7	12.9	14.3	16.0	19.2	22.5	
-100	11.3	12.3	12.0	11.9	12.6	13.3	12.8	12.4	13.3	14.2	14.1	14.2	15.9	17.7	18.0	18.4	20.4	22.5	
-90	24.1	24.8	23.9	23.1	23.7	24.3	23.2	22.2	23.0	23.7	22.7	21.7	22.5	23.3	22.2	21.0	21.8	22.5	
-80	41.6	41.9	40.1	38.2	38.6	38.8	36.9	35.2	35.2	35.0	32.6	30.4	29.9	29.2	26.5	23.9	23.2	22.5	
-70	62.1	61.9	59.7	57.6	57.1	55.7	53.0	50.0	49.0	46.8	43.0	39.8	37.8	35.1	30.8	26.9	24.6	22.5	
-60	84.2	83.5	81.3	79.2	77.2	74.1	70.3	66.8	63.5	58.6	53.3	49.1	45.6	40.7	34.9	29.7	26.0	22.5	
-50	105	104	102	99.2	96.1	91.4	86.8	82.5	76.9	70.6	64.0	58.4	53.6	45.7	38.6	32.5	27.3	22.5	
-40	125	123	120	117	112	106	102	95.8	88.7	81.2	74.2	66.9	58.5	49.8	41.7	34.9	28.4	22.5	
-30	143	140	137	132	127	121	113	106	99.0	91.0	82.4	73.1	62.7	53.4	45.0	37.0	29.4	22.5	
-20	156	154	150	145	139	131	123	115	107	97.8	87.7	77.4	66.8	56.8	47.6	38.6	30.2	22.5	
-10	164	162	158	153	146	138	130	120	111	102	91.4	80.9	70.2	59.3	49.4	39.7	30.7	22.5	
0	166	164	160	155	149	141	133	123	114	104	93.5	82.4	71.3	60.5	50.3	40.2	30.9	22.5	
10	163	160	157	152	145	138	130	122	113	103	92.4	81.5	70.5	59.7	49.6	39.8	30.8	22.5	
20	155	152	149	144	138	132	124	116	107	98.0	88.3	78.1	67.8	57.6	48.1	38.8	30.3	22.5	
30	141	140	136	132	127	121	115	108	99.7	90.7	81.2	72.1	62.8	54.8	45.6	37.3	29.6	22.5	
40	124	123	120	116	112	108	102	95.4	88.9	81.5	73.1	64.0	56.2	48.9	42.4	35.4	28.7	22.5	
50	105	103	102	98.5	94.8	91.4	86.9	81.1	75.4	69.9	63.4	55.9	48.5	43.4	38.3	33.1	27.7	22.5	
60	84.1	82.7	81.6	79.5	76.2	73.4	70.6	65.8	60.6	56.6	52.9	47.5	41.6	37.2	34.0	30.5	26.4	22.5	
70	62.4	60.9	60.8	60.0	57.3	54.9	54.1	50.8	47.1	43.7	41.6	38.7	34.6	31.3	29.7	27.8	25.1	22.5	
80	42.1	40.9	41.5	41.9	39.8	37.7	37.5	36.9	34.2	31.7	31.1	30.2	28.0	25.9	25.6	25.1	23.8	22.5	
90	24.1	23.1	23.8	24.5	23.3	22.1	22.8	23.5	22.3	21.2	22.0	22.7	21.9	21.1	21.8	22.5	22.5	22.5	
100	10.3	9.40	9.95	10.5	10.2	9.99	11.2	12.4	12.7	13.1	14.7	16.2	16.5	16.8	18.4	20.0	21.2	22.5	
110	2.99	2.42	2.53	2.70	2.77	3.16	4.30	5.41	6.24	7.43	9.31	11.0	11.9	13.2	15.4	17.8	20.0	22.5	
120	0.49	0.37	0.37	0.38	0.42	0.71	1.28	1.89	2.63	3.88	5.59	6.98	8.31	10.2	12.8	15.8	18.8	22.5	
130	0.11	0.10	0.12	0.12	0.13	0.18	0.28	0.47	0.93	1.86	3.00	4.14	5.61	7.89	10.8	14.1	17.9	22.5	
140	0.09	0.08	0.09	0.08	0.10	0.10	0.11	0.15	0.32	0.72	1.34	2.33	3.92	6.16	9.12	12.6	17.0	22.5	
150	0.11	0.10	0.10	0.12	0.12	0.12	0.16	0.12	0.14	0.25	0.55	1.37	2.82	4.96	7.70	11.4	16.3	22.5	
160	0.11	0.11	0.14	0.15	0.14	0.14	0.16	0.17	0.12	0.14	0.31	0.86	2.11	3.95	6.67	10.5	15.8	22.5	
170	0.10	0.12	0.15	0.16	0.15	0.15	0.14	0.14	0.13	0.12	0.20	0.55	1.55	3.29	6.00	9.97	15.5	22.5	
180	0.13	0.18	0.18	0.20	0.19	0.18	0.17	0.16	0.15	0.14	0.15	0.40	1.27	2.94	5.65	9.69	15.3	22.5	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2018-11-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.584m [K=1.0000]
Remarks: