

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

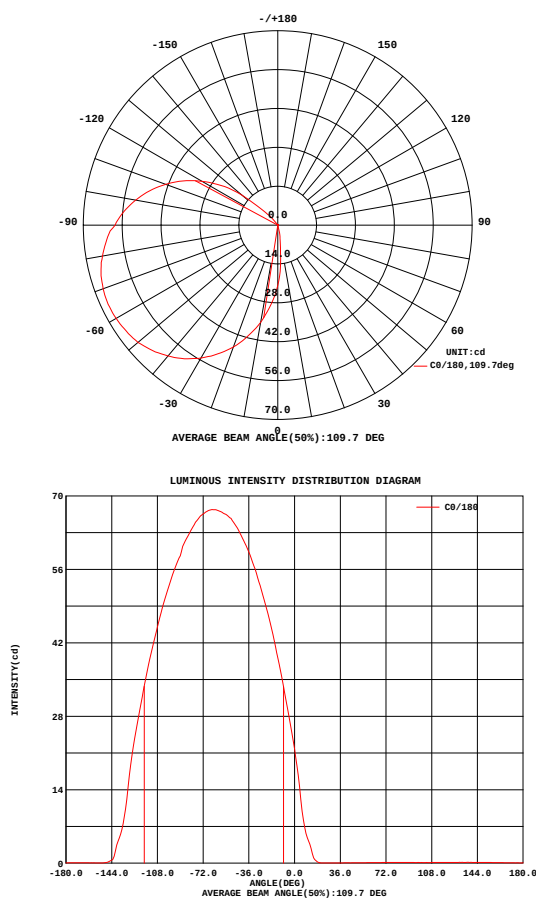


Fig. C0/C180

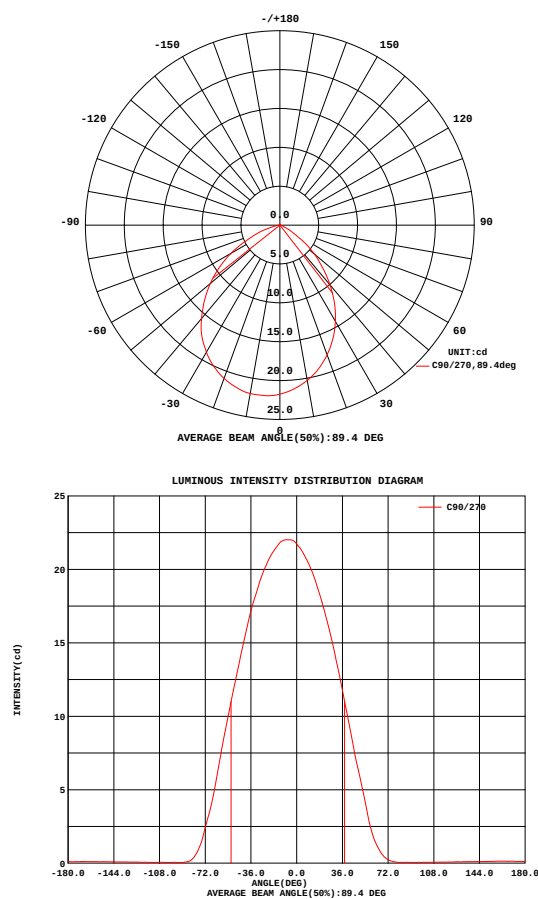


Fig. C90/C270

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2017-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.565m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	383.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	360.0V x 98.1H
	At 50% of Imax	360.0V x 81.3H
	At 90% of Imax	110.9V x 49.1H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	980.8 lumens per klm.
	To 50% of Imax	748.8 lumens per klm.
	To 90% of Imax	137.8 lumens per klm.

Upward LOR	25.3 %
Downward LOR	74.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2017-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.565m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: T形LED太阳能感应灯	TYPE: P9106	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2017060702
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

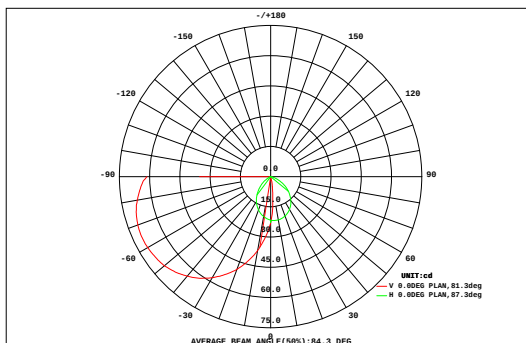

DATA OF LAMP		Eff: 108.56 lm/W	
MODEL	亿光2835 5000K	I _{max} (cd)	70.61
NOMINAL POWER(W)		AVAILABILITY(%)	98.0
RATED VOLTAGE(V)	0	Avai. FLUX(lm)	180.4
NOMINAL FLUX(lm)	184.116	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	184.1
TEST VOLTAGE(V)	3.2	θ @50%(H,V)	81,360DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		Φ t	Φ a
	0.16	0.48	0.74	0.91	0.97	0.88	0.66	0.34	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.25	5.13
90	0.16	0.48	0.74	0.91	0.97	0.88	0.66	0.34	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.25	5.13
80	0.17	0.49	0.77	0.98	1.07	1.03	0.83	0.52	0.19	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.08	5.97
70	0.17	0.50	0.81	1.04	1.16	1.15	0.98	0.69	0.33	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.91	6.81
60	0.17	0.51	0.84	1.09	1.24	1.25	1.12	0.85	0.48	0.13	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.69	7.60
50	0.17	0.52	0.86	1.13	1.30	1.34	1.24	0.99	0.62	0.20	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.39	8.31
40	0.17	0.53	0.88	1.16	1.36	1.41	1.33	1.10	0.73	0.26	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.98	8.88
30	0.17	0.54	0.89	1.19	1.39	1.46	1.40	1.18	0.82	0.33	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.42	9.33
20	0.17	0.54	0.90	1.20	1.42	1.50	1.44	1.23	0.87	0.37	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.70	9.60
10	0.17	0.54	0.90	1.21	1.43	1.51	1.46	1.25	0.89	0.38	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.80	9.70
0	0.17	0.54	0.90	1.20	1.41	1.50	1.44	1.23	0.86	0.35	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.66	9.56
-10	0.17	0.53	0.88	1.17	1.37	1.45	1.38	1.16	0.80	0.31	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.28	9.18
-20	0.17	0.53	0.86	1.15	1.33	1.39	1.31	1.07	0.71	0.24	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.79	8.70
-30	0.17	0.52	0.84	1.11	1.28	1.31	1.21	0.96	0.59	0.17	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.18	8.09
-40	0.17	0.51	0.82	1.07	1.21	1.22	1.09	0.82	0.45	0.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.46	7.36
-50	0.17	0.50	0.79	1.01	1.13	1.11	0.95	0.66	0.30	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.67	6.57
-60	0.16	0.48	0.76	0.96	1.04	0.98	0.79	0.48	0.17	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.86	5.75
-70	0.16	0.47	0.73	0.89	0.94	0.85	0.63	0.31	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.08	4.96
-80	0.16	0.46	0.69	0.83	0.84	0.71	0.46	0.17	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.36	4.23
-90	0.16	0.46	0.69	0.83	0.84	0.71	0.46	0.17	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.36	4.23
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	3.03	9.19	14.9	19.3	21.9	22.1	19.7	15.0	9.00	3.01	0.29	0.03	0.03	0.03	0.03	0.03	0.02	0.01	138	---
Φ a	3.03	9.19	14.9	19.3	21.9	22.1	19.7	14.9	8.59	2.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	136


one-half-peak spread: U:180.0,D:180.0 , L:56.1,RN50A6Beam Type: Type 5 x 7 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2017-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.565m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: T形LED太阳能感应灯	TYPE: P9106	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2017060702
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

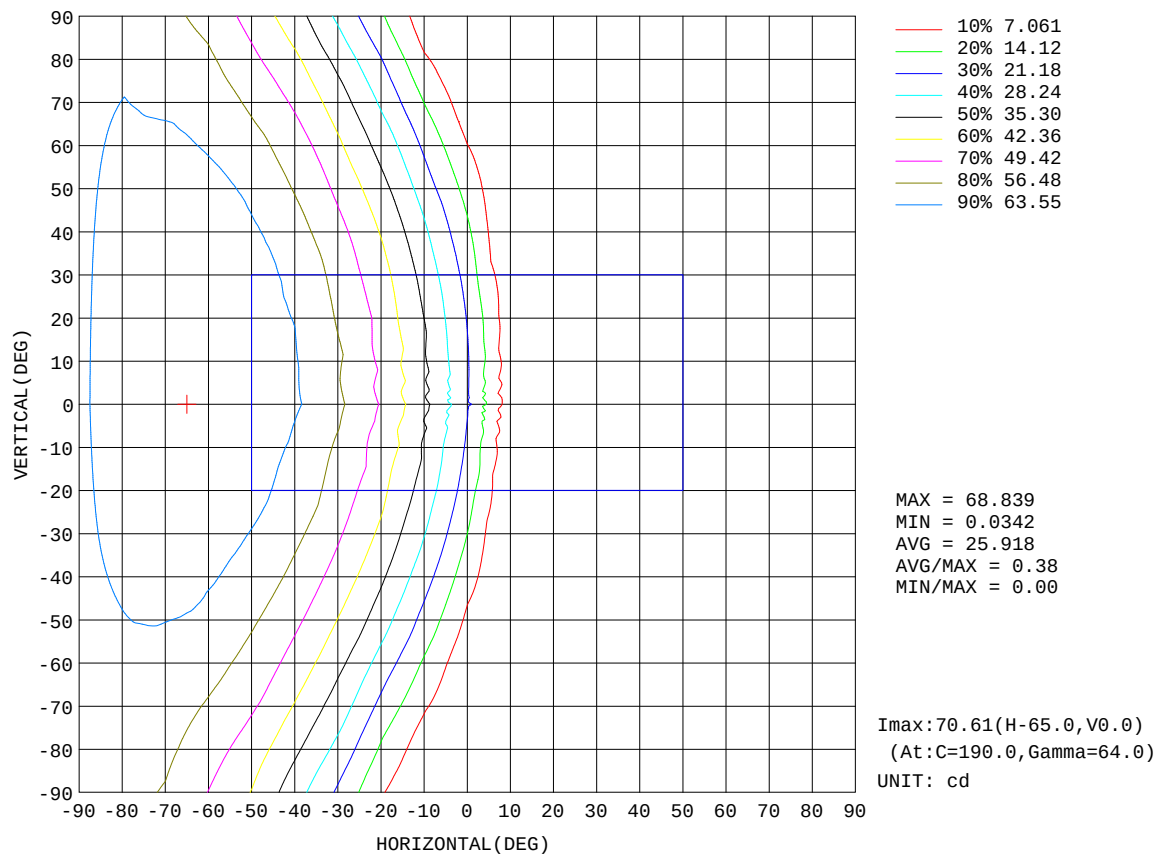


H(β) Range: -90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: YT
 Test Date: 2017-06-07

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
 Humidity: 65.0%
 Test Distance: 1.565m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: T形LED太阳能感应灯	TYPE: P9106	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2017060702
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

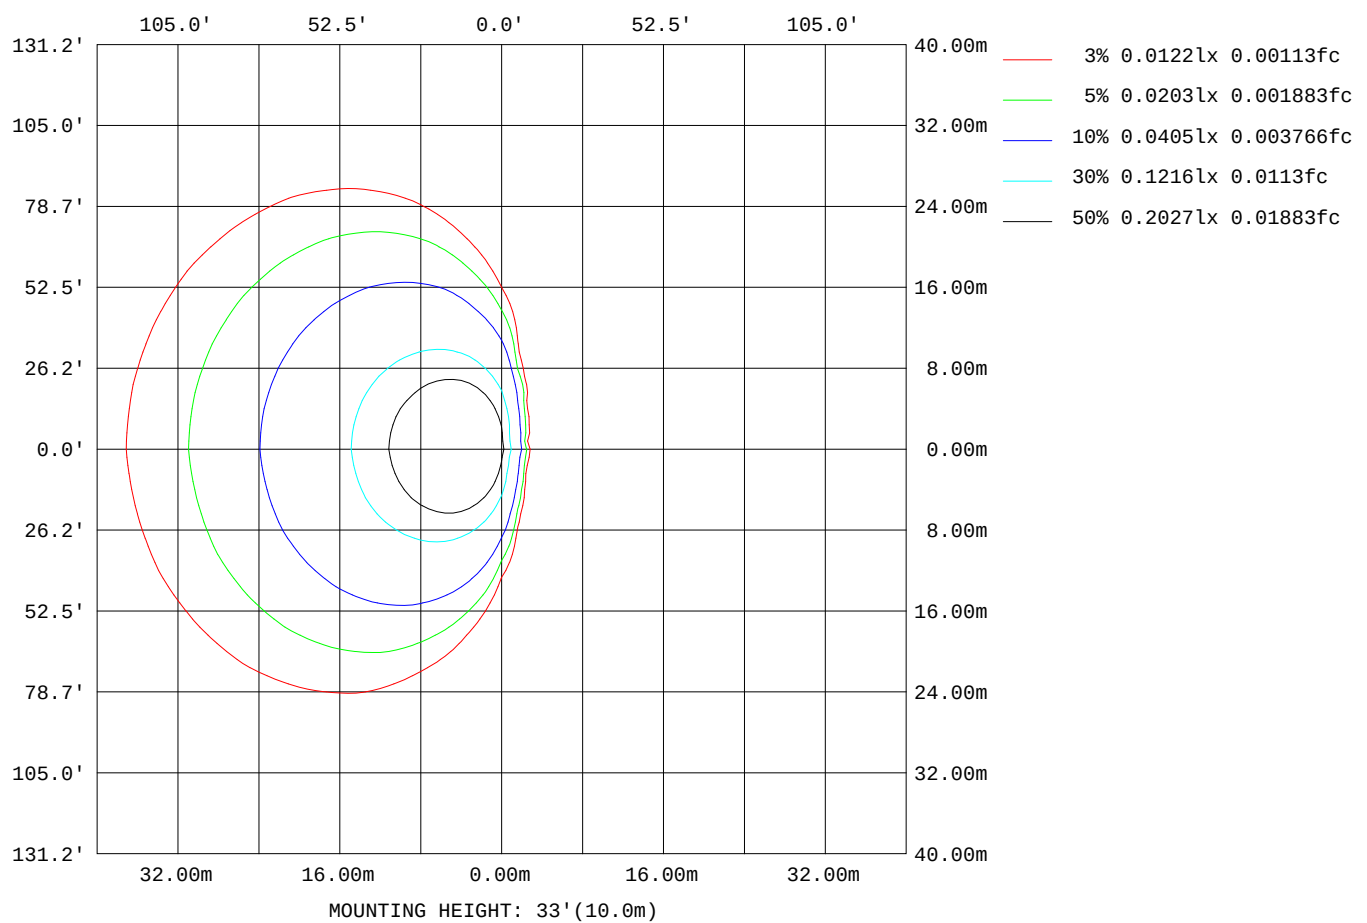


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: YT
Test Date: 2017-06-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity: 65.0%
Test Distance: 1.565m [K=1.0000]
Remarks:

AAI Figure

NAME: T形LED太阳能感应灯	TYPE: P9106	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2017060702
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

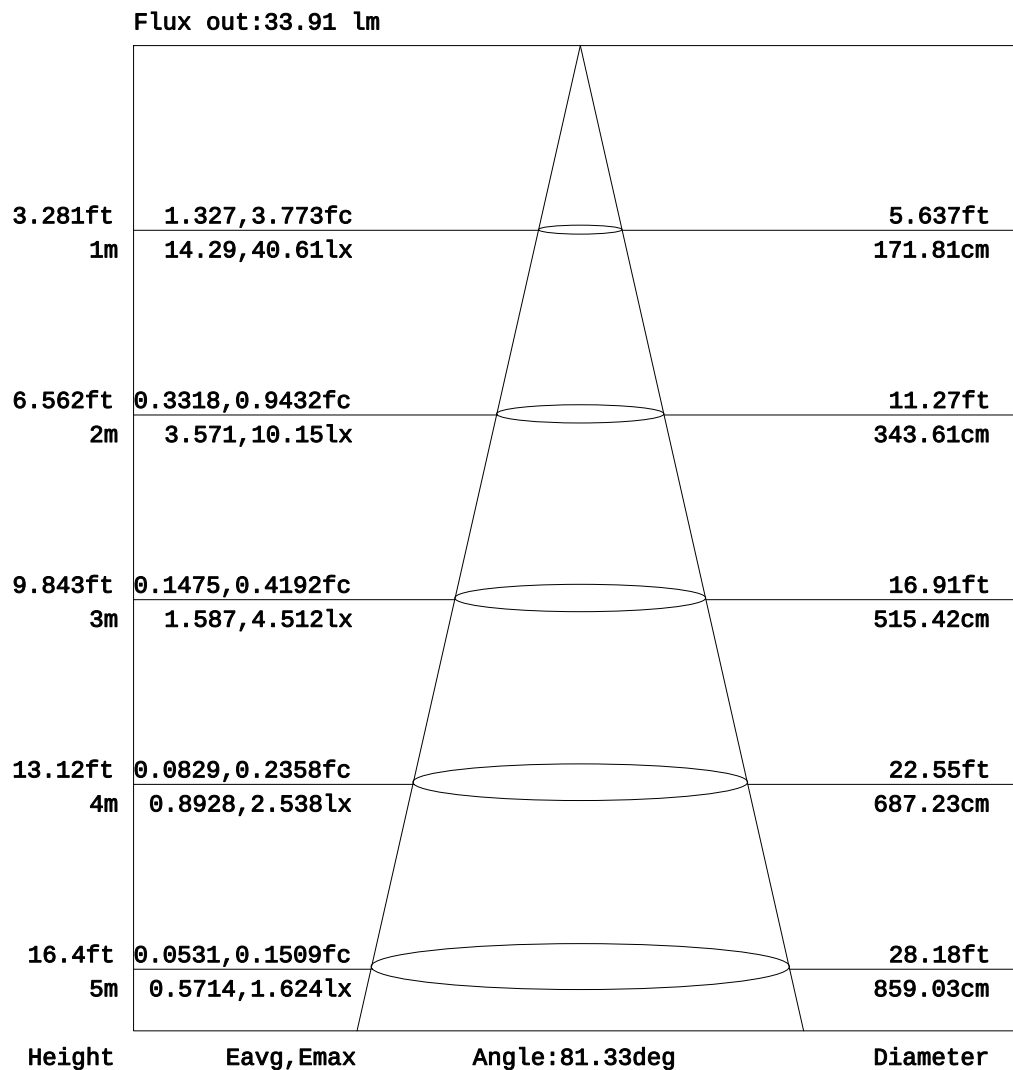


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: YT
Test Date: 2017-06-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity: 65.0%
Test Distance: 1.565m [K=1.0000]
Remarks:

Planar Illuminance Curve

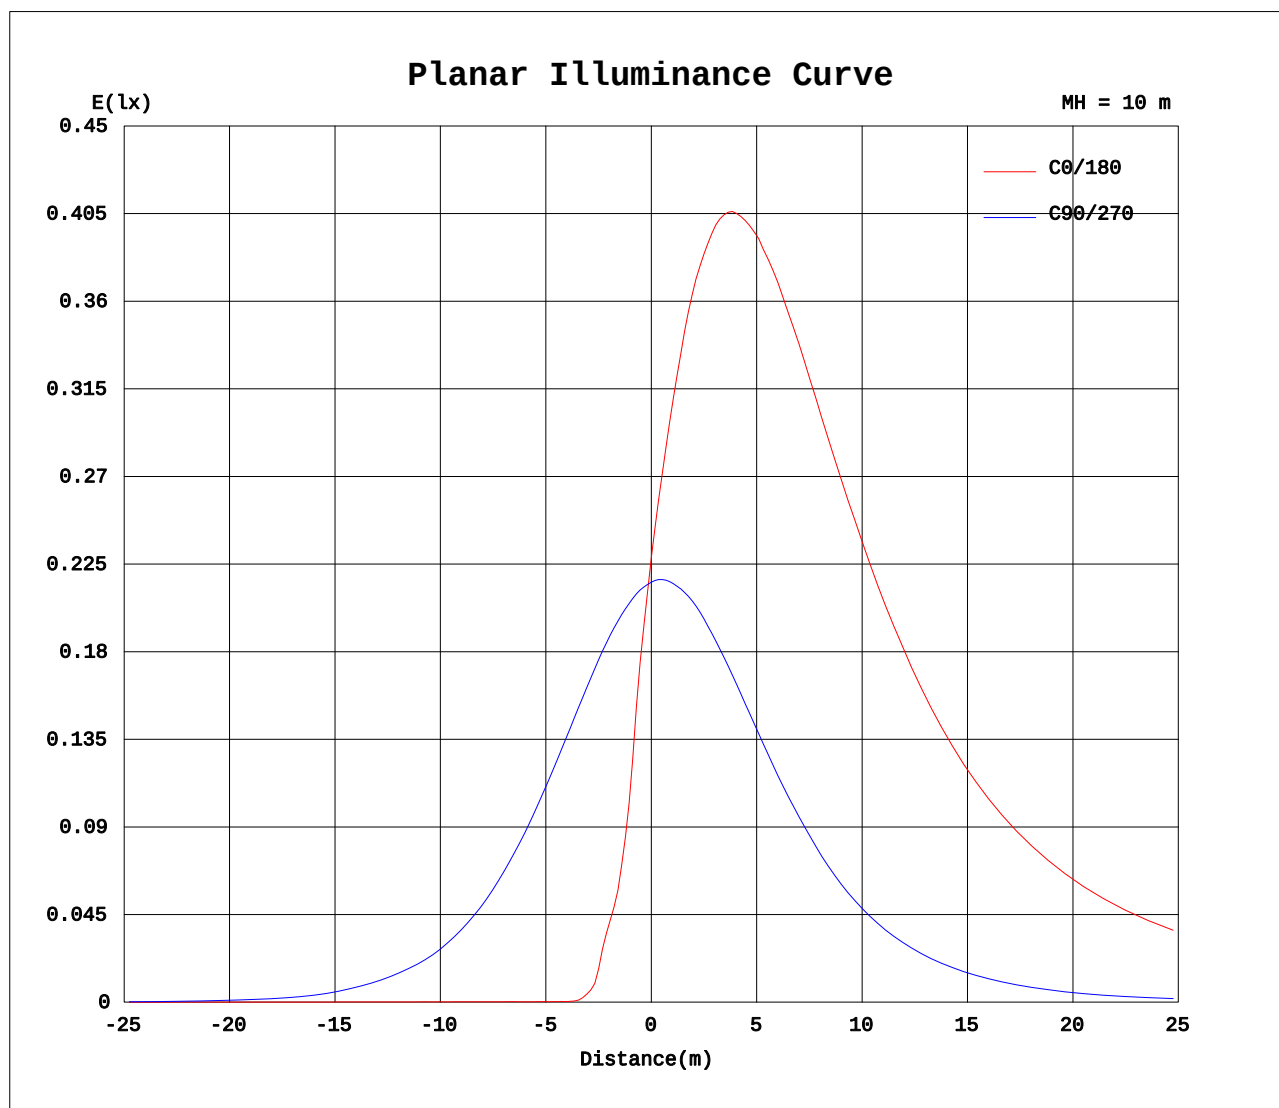

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2017-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.565m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: T形LED太阳能感应灯	TYPE: P9106	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2017060702
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	61.4	58.3	54.4	50.1	45.0	39.6	33.1	26.2	17.6	7.89	3.64	0.46	0.08	0.05	0.07	0.07	0.07	0.07	0.11
-170	61.4	58.1	54.1	49.6	44.5	39.0	32.6	25.7	17.6	8.07	3.78	0.53	0.12	0.08	0.10	0.12	0.12	0.13	0.13
-160	61.4	58.1	54.0	49.6	44.6	39.3	33.2	26.8	19.9	10.6	4.57	1.07	0.12	0.08	0.09	0.11	0.12	0.13	0.13
-150	61.4	58.1	54.2	50.0	45.3	40.3	35.0	29.1	21.8	12.5	4.99	1.79	0.28	0.09	0.08	0.09	0.10	0.11	0.12
-140	61.4	58.2	54.5	50.7	46.5	41.9	37.2	30.4	23.3	16.4	8.54	3.34	0.80	0.11	0.07	0.08	0.09	0.10	0.10
-130	61.4	58.4	55.1	51.6	47.9	44.1	38.5	32.5	26.3	20.3	13.5	5.92	1.92	0.42	0.10	0.07	0.07	0.08	0.09
-120	61.4	58.8	55.8	52.8	49.7	45.7	40.6	35.3	30.0	24.4	17.3	10.6	5.03	1.38	0.42	0.06	0.07	0.07	0.08
-110	61.4	59.2	56.7	54.4	51.4	47.7	43.3	38.6	33.9	28.1	21.7	15.5	9.78	5.11	1.23	0.24	0.08	0.06	0.07
-100	61.4	59.6	57.7	55.7	53.8	50.1	46.2	42.1	38.0	32.4	26.5	20.6	14.7	8.89	3.18	1.48	0.11	0.07	0.07
-90	61.4	60.0	58.7	57.4	56.0	52.6	49.3	45.7	42.1	36.8	31.4	25.8	20.2	13.9	7.69	4.14	0.59	0.32	0.06
-80	61.4	60.7	59.8	58.9	58.0	55.3	52.5	49.3	46.2	41.5	36.7	31.6	26.3	19.8	13.2	8.06	2.94	1.46	0.06
-70	61.4	61.5	60.9	60.5	59.9	58.0	55.8	53.2	50.2	46.3	41.9	37.1	32.0	25.9	19.3	13.6	8.09	4.16	0.35
-60	61.4	62.1	62.1	62.2	61.9	60.8	58.9	56.7	54.0	50.8	46.6	42.2	37.2	31.7	25.6	19.4	13.2	7.50	1.88
-50	61.4	62.7	63.3	63.7	63.6	63.3	61.8	59.9	57.4	54.5	51.0	46.8	42.2	37.2	31.4	25.4	18.9	12.4	5.77
-40	61.4	63.2	64.3	65.1	65.3	65.0	64.4	62.6	60.5	57.9	54.8	50.9	46.7	41.9	36.6	30.4	24.0	17.3	9.98
-30	61.4	63.7	65.2	66.3	66.6	66.6	66.0	65.1	63.2	60.9	58.2	54.5	50.4	45.9	40.8	34.8	28.6	21.7	14.2
-20	61.4	64.1	65.9	67.2	67.8	68.0	67.5	66.6	65.3	63.4	60.3	57.3	53.8	49.0	43.9	38.6	32.0	25.2	17.6
-10	61.4	64.5	66.6	68.2	69.0	69.3	69.0	68.2	66.9	65.1	62.4	59.2	55.4	50.9	46.5	41.1	34.6	27.5	20.1
0	61.4	64.8	67.2	69.0	70.1	70.6	70.4	69.8	68.8	66.9	64.4	61.5	57.9	53.6	48.9	43.2	37.2	30.2	22.8
10	61.4	64.7	67.0	68.8	69.8	70.3	70.1	69.4	68.3	66.4	64.0	60.6	57.2	53.4	47.9	42.1	36.3	29.4	21.8
20	61.4	64.6	66.7	68.4	69.4	69.9	69.6	68.7	67.5	65.8	63.1	59.7	55.9	51.8	47.0	41.1	35.3	28.1	20.8
30	61.4	64.4	66.3	67.9	68.8	68.9	68.5	67.7	66.2	64.2	61.2	58.0	54.4	49.7	44.7	39.3	32.9	25.9	18.8
40	61.4	64.1	65.8	67.3	67.6	67.6	67.2	65.9	64.3	62.0	59.1	55.5	51.5	46.8	41.8	35.9	29.5	22.6	15.6
50	61.4	63.8	65.1	66.1	66.2	66.1	65.2	64.0	61.9	59.2	56.0	52.3	47.8	43.0	37.6	31.8	25.0	18.3	11.6
60	61.4	63.3	64.4	64.7	64.6	64.1	63.0	61.4	58.9	56.0	52.4	48.5	43.6	38.4	32.8	26.7	19.9	13.5	7.21
70	61.4	62.8	63.6	63.1	62.6	61.7	60.4	58.1	55.2	51.9	48.4	43.9	38.8	33.1	27.2	20.7	14.0	8.50	3.02
80	61.4	62.1	62.6	61.5	60.4	58.9	57.5	54.3	51.0	47.4	43.7	38.6	33.2	27.4	21.5	14.8	8.07	4.28	0.51
90	61.4	61.5	61.6	60.0	58.3	56.4	54.5	50.7	46.8	42.7	38.6	32.7	26.8	20.9	15.1	9.07	3.07	1.56	0.05
100	61.4	61.1	60.6	58.4	56.2	53.5	51.1	46.9	42.6	38.1	33.6	27.2	20.7	14.9	9.33	4.81	0.50	0.21	0.05
110	61.4	60.6	59.5	56.9	54.1	51.1	48.0	43.5	38.4	33.2	28.2	22.0	15.1	8.93	3.39	1.21	0.17	0.05	0.05
120	61.4	60.0	58.4	55.6	52.2	48.6	44.8	40.4	34.5	28.6	22.7	16.6	8.89	3.08	1.01	0.15	0.07	0.06	0.07
130	61.4	59.6	57.5	54.5	50.4	46.1	41.6	37.1	31.2	24.2	17.3	9.84	4.10	0.88	0.17	0.06	0.07	0.07	0.07
140	61.4	59.2	56.5	53.5	49.1	44.1	39.0	33.5	27.7	20.6	11.1	4.75	1.41	0.27	0.07	0.07	0.08	0.08	0.09
150	61.4	58.8	55.7	52.2	48.3	42.8	37.1	30.5	23.9	16.2	7.80	2.73	0.34	0.09	0.07	0.07	0.08	0.09	0.09
160	61.4	58.6	55.0	51.1	46.7	41.9	36.1	29.1	21.3	10.9	5.04	1.14	0.23	0.07	0.08	0.09	0.09	0.10	0.10
170	61.4	58.4	54.6	50.4	45.5	40.3	34.3	27.7	20.2	10.2	4.63	0.70	0.12	0.07	0.07	0.08	0.09	0.10	0.11
180	61.4	58.3	54.4	50.1	45.0	39.6	33.1	26.2	17.6	7.89	3.64	0.46	0.08	0.05	0.07	0.07	0.07	0.07	0.11

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:YT
 Test Date:2017-06-07

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
 Humidity:65.0%
 Test Distance:1.565m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: T形LED太阳能感应灯	TYPE: P9106	WEIGHT:
DIM.:	SPEC.:	SERIAL No.: 2017060702
MFR.: UTEC	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.07	0.08	0.09	0.11	0.13	0.14	0.15	0.15	0.16	0.16	0.15	0.15	0.14	0.13	0.13	0.13	0.13	0.13	
-170	0.12	0.11	0.11	0.12	0.13	0.14	0.15	0.16	0.16	0.16	0.14	0.14	0.14	0.13	0.13	0.13	0.13	0.13	
-160	0.13	0.13	0.13	0.13	0.14	0.14	0.15	0.15	0.15	0.15	0.15	0.15	0.13	0.13	0.13	0.13	0.13	0.13	
-150	0.12	0.12	0.13	0.14	0.14	0.14	0.15	0.15	0.14	0.15	0.14	0.13	0.13	0.12	0.13	0.12	0.13	0.13	
-140	0.11	0.12	0.12	0.12	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.12	0.12	0.13	0.13	0.13	
-130	0.09	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.13	0.13	
-120	0.08	0.08	0.09	0.09	0.10	0.10	0.10	0.11	0.11	0.12	0.11	0.11	0.12	0.12	0.12	0.12	0.13	0.13	
-110	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.10	0.10	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.13	0.13	
-100	0.07	0.07	0.07	0.07	0.08	0.09	0.09	0.09	0.10	0.10	0.10	0.11	0.12	0.13	0.13	0.12	0.13	0.13	
-90	0.06	0.06	0.07	0.07	0.08	0.09	0.09	0.09	0.10	0.11	0.11	0.11	0.12	0.13	0.13	0.13	0.13	0.13	
-80	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.11	0.12	0.11	0.11	0.12	0.12	0.12	0.13	0.13	0.13	
-70	0.19	0.06	0.06	0.07	0.08	0.09	0.10	0.10	0.11	0.12	0.12	0.12	0.13	0.13	0.14	0.13	0.13	0.13	
-60	0.81	0.06	0.06	0.07	0.07	0.08	0.10	0.09	0.11	0.11	0.12	0.13	0.13	0.13	0.13	0.14	0.13	0.13	
-50	2.28	0.31	0.07	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.13	0.13	0.13	0.13	0.13	0.13	
-40	4.13	1.12	0.06	0.06	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.13	0.14	0.13	0.13	0.13	
-30	5.70	1.54	0.23	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.11	0.11	0.13	0.14	0.13	0.14	0.13	0.13	
-20	8.47	3.32	0.45	0.05	0.04	0.05	0.06	0.07	0.07	0.09	0.10	0.11	0.13	0.13	0.14	0.14	0.13	0.13	
-10	10.2	4.20	0.71	0.05	0.05	0.05	0.06	0.06	0.07	0.08	0.10	0.11	0.12	0.13	0.14	0.14	0.13	0.13	
0	12.7	5.12	1.08	0.08	0.04	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14	0.14	0.13	0.13	
10	11.5	4.76	0.97	0.09	0.04	0.05	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.12	0.13	0.14	0.13	0.13	
20	11.4	4.35	0.93	0.09	0.04	0.05	0.05	0.06	0.07	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.13	0.13	
30	8.52	3.55	0.66	0.06	0.05	0.05	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.13	0.13	
40	6.83	2.16	0.31	0.06	0.05	0.06	0.06	0.06	0.06	0.07	0.08	0.09	0.09	0.10	0.10	0.10	0.12	0.12	0.13
50	5.11	1.12	0.15	0.06	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.08	0.10	0.10	0.10	0.11	0.12	0.13	
60	3.17	0.20	0.09	0.05	0.06	0.07	0.07	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.10	0.11	0.12	0.13	
70	1.43	0.05	0.05	0.06	0.06	0.06	0.07	0.07	0.08	0.09	0.09	0.09	0.10	0.10	0.11	0.12	0.12	0.13	
80	0.28	0.05	0.06	0.06	0.07	0.07	0.07	0.08	0.08	0.09	0.10	0.09	0.10	0.11	0.11	0.11	0.12	0.13	
90	0.06	0.06	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.11	0.11	0.11	0.11	0.11	0.12	0.13	
100	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.09	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.13	
110	0.06	0.08	0.08	0.07	0.09	0.08	0.09	0.10	0.10	0.11	0.11	0.11	0.12	0.12	0.13	0.13	0.13	0.13	
120	0.07	0.07	0.08	0.09	0.09	0.10	0.10	0.11	0.12	0.12	0.11	0.12	0.12	0.12	0.13	0.13	0.13	0.13	
130	0.08	0.09	0.09	0.10	0.09	0.10	0.11	0.11	0.11	0.12	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	
140	0.09	0.09	0.10	0.10	0.10	0.11	0.11	0.12	0.12	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	
150	0.10	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.12	0.13	0.13	0.13	0.14	0.14	0.13	0.13	0.13	0.13	
160	0.11	0.11	0.11	0.11	0.12	0.11	0.12	0.12	0.12	0.13	0.14	0.13	0.14	0.14	0.13	0.13	0.13	0.13	
170	0.10	0.10	0.10	0.11	0.11	0.11	0.12	0.12	0.12	0.14	0.14	0.14	0.14	0.13	0.13	0.13	0.13	0.13	
180	0.07	0.08	0.09	0.11	0.13	0.14	0.15	0.15	0.16	0.16	0.15	0.15	0.14	0.13	0.13	0.13	0.13	0.13	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:YT
 Test Date:2017-06-07

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
 Humidity:65.0%
 Test Distance:1.565m [K=1.0000]
 Remarks: