

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

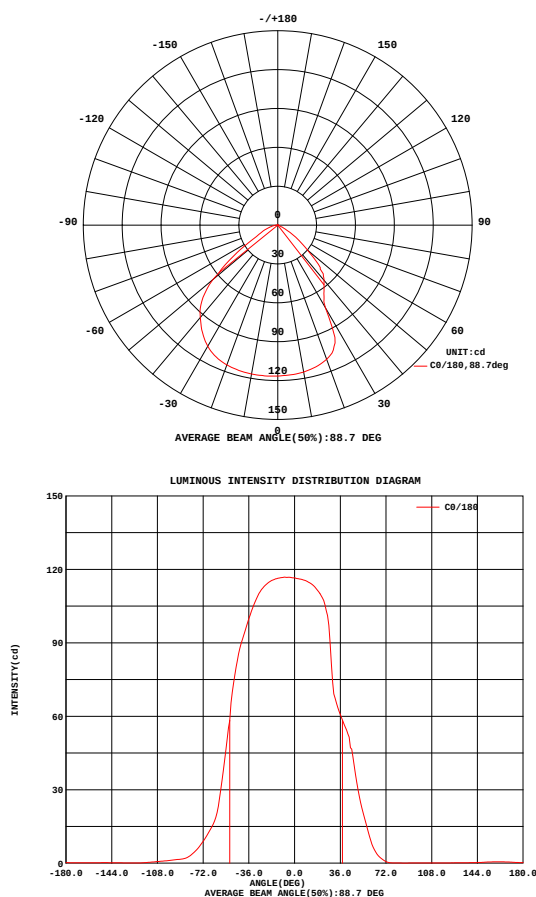


Fig. C0/C180

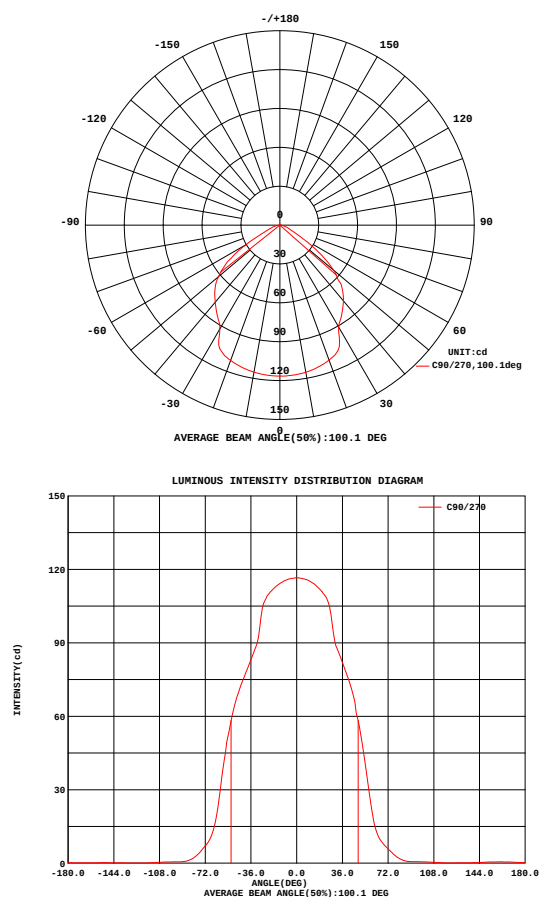


Fig. C90/C270

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2015-04-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.540m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	467.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	131.3V x 127.1H
	At 50% of Imax	100.2V x 88.7H
	At 90% of Imax	52.6V x 56.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	953.7 lumens per klm.
	To 50% of Imax	767.0 lumens per klm.
	To 90% of Imax	348.9 lumens per klm.

Upward LOR	0.8 %
Downward LOR	99.2 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2015-04-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.540m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: 250长方LED感应壁灯	TYPE: LG5630	WEIGHT:
DIM.:	SPEC.: 我司驱动	SERIAL No.: 2015041002
MFR.: UTEC	SUR.: PC	PROTECTION ANGLE:

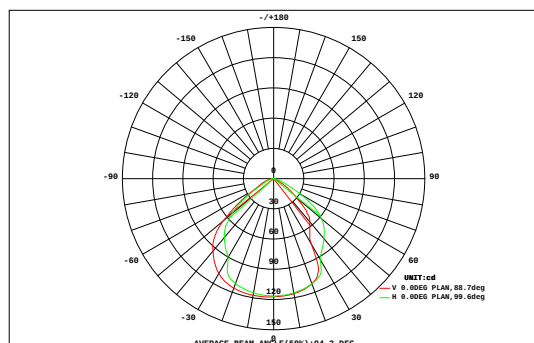

DATA OF LAMP				PHOTOMETRIC DATA	
MODEL				Imax(cd)	117.6
NOMINAL POWER(W)	0			AVAILABILITY(%)	95.3
RATED VOLTAGE(V)	0			Avai. FLUX(lm)	239.9
NOMINAL FLUX(lm)	251.796			LOR(%)	100.0
LAMPS INSIDE	1			TOTAL FLUX(lm)	251.8
TEST VOLTAGE(V)	0.0			θ @50%(H,V)	89,100DEG

		AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
		0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.40	0.00	
VERTICAL (DEG)	90	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.40	0.00	
	80	0.00	0.02	0.04	0.06	0.09	0.12	0.15	0.16	0.16	0.13	0.08	0.05	0.04	0.02	0.01	0.00	0.00	0.00	1.13	0.00	
	70	0.01	0.02	0.06	0.12	0.19	0.31	0.41	0.48	0.47	0.44	0.28	0.15	0.09	0.05	0.02	0.01	0.00	0.00	3.11	1.69	
	60	0.01	0.03	0.08	0.19	0.40	0.90	1.20	1.39	1.41	1.37	1.00	0.48	0.28	0.11	0.04	0.01	0.00	0.00	8.91	8.33	
	50	0.01	0.04	0.12	0.31	0.86	1.52	1.87	2.08	2.13	2.11	1.81	0.85	0.51	0.24	0.07	0.02	0.00	0.00	14.6	14.2	
	40	0.01	0.05	0.15	0.45	1.28	2.00	2.39	2.52	2.56	2.54	2.36	1.39	0.70	0.39	0.12	0.03	0.00	0.00	18.9	18.7	
	30	0.01	0.05	0.18	0.61	1.53	2.31	2.85	3.11	3.20	3.16	2.97	2.15	1.11	0.61	0.20	0.04	0.00	0.00	24.1	23.9	
	-30	0.01	0.06	0.21	0.76	1.72	2.46	3.02	3.32	3.44	3.41	3.23	2.54	1.41	0.79	0.31	0.05	0.00	0.00	26.7	26.6	
		0.01	0.06	0.21	0.78	1.78	2.54	3.10	3.41	3.53	3.50	3.31	2.71	1.56	0.94	0.34	0.06	0.00	0.00	27.8	27.7	
		0.01	0.06	0.20	0.75	1.76	2.52	3.09	3.40	3.52	3.51	3.32	2.73	1.55	0.90	0.33	0.05	0.00	0.00	27.7	27.5	
		0.01	0.05	0.19	0.68	1.68	2.46	3.02	3.33	3.44	3.42	3.24	2.63	1.45	0.78	0.28	0.04	0.00	0.00	26.7	26.5	
		0.01	0.05	0.17	0.60	1.52	2.29	2.87	3.15	3.21	3.14	2.94	2.25	1.04	0.60	0.19	0.04	0.00	0.00	24.1	23.8	
		-40	0.01	0.04	0.15	0.43	1.18	2.00	2.47	2.58	2.57	2.52	2.37	1.52	0.72	0.38	0.12	0.03	0.00	0.00	19.1	18.8
		-50	0.01	0.04	0.12	0.27	0.78	1.47	1.86	2.02	2.07	2.02	1.81	1.02	0.51	0.25	0.07	0.02	0.00	0.00	14.3	14.0
		-60	0.01	0.03	0.09	0.18	0.38	0.74	1.10	1.18	1.20	1.15	0.93	0.46	0.23	0.11	0.04	0.02	0.00	0.00	7.85	7.18
	-70	0.00	0.02	0.06	0.11	0.19	0.26	0.36	0.38	0.38	0.35	0.25	0.14	0.08	0.05	0.02	0.01	0.00	0.00	2.68	1.05	
-80	0.00	0.02	0.04	0.06	0.09	0.12	0.14	0.15	0.15	0.13	0.09	0.06	0.04	0.02	0.01	0.00	0.00	0.00	1.14	0.00		
-90	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.42	0.00	
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)		20	30	40	50	60	70	80	90			
Φ t	0.11	0.66	2.10	6.44	15.5	24.1	30.0	32.8	33.5	33.0	30.1	21.2	11.4	6.26	2.21	0.44	0.05	0.00	250	---		
Φ a	0.00	0.00	1.19	5.74	14.9	23.5	29.4	32.1	32.9	32.4	29.5	20.6	10.8	5.64	1.39	0.00	0.00	0.00	---	240		


one-half-peak spread: U:49.9,D:50.8 , L:43.1,R:38.5 Beam Type: Type 6 x 7 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2015-04-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 250长方LED感应壁灯	TYPE: LG5630	WEIGHT:
DIM.:	SPEC.: 我司驱动	SERIAL No.: 2015041002
MFR.: UTEC	SUR.: PC	PROTECTION ANGLE:

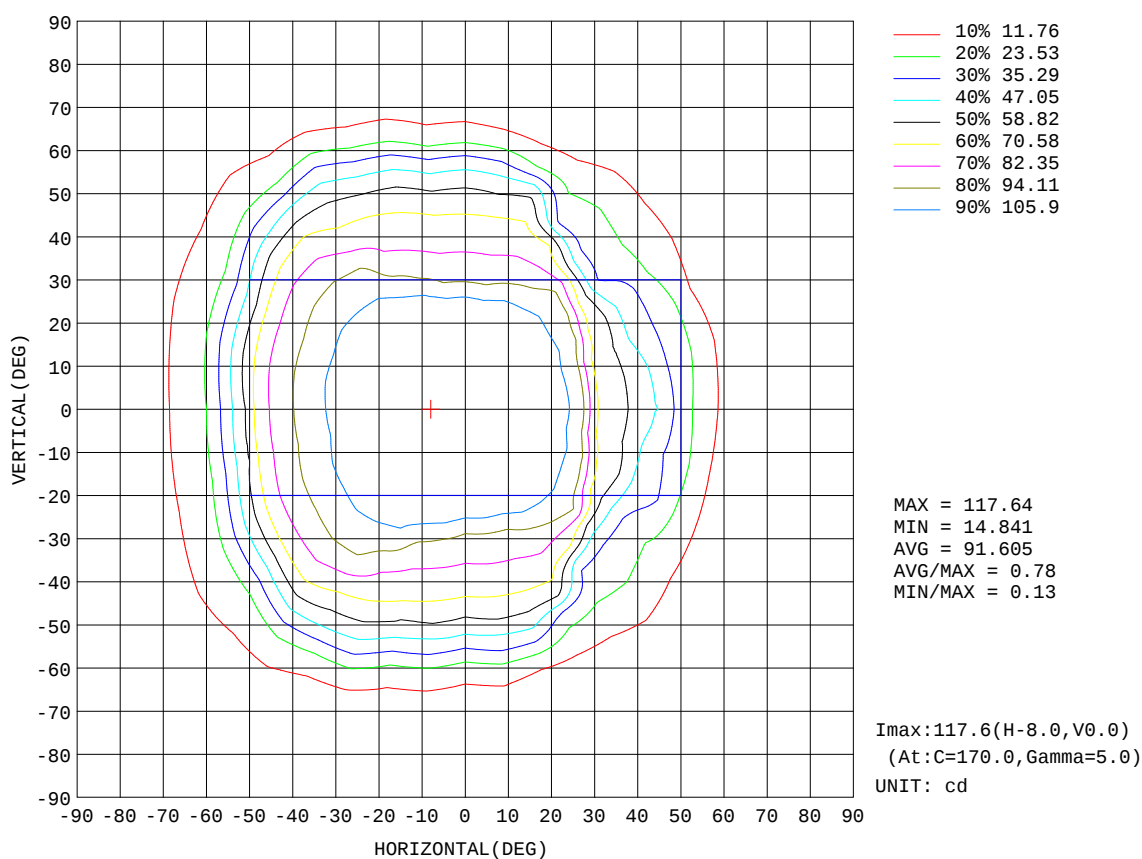


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: YT
Test Date: 2015-04-10

V(β) Range: -180 - 180DEG
V(β) Interval: 0.5DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity: 65.0%
Test Distance: 1.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: 250长方LED感应壁灯	TYPE: LG5630	WEIGHT:
DIM.:	SPEC.: 我司驱动	SERIAL No.: 2015041002
MFR.: UTEC	SUR.: PC	PROTECTION ANGLE:

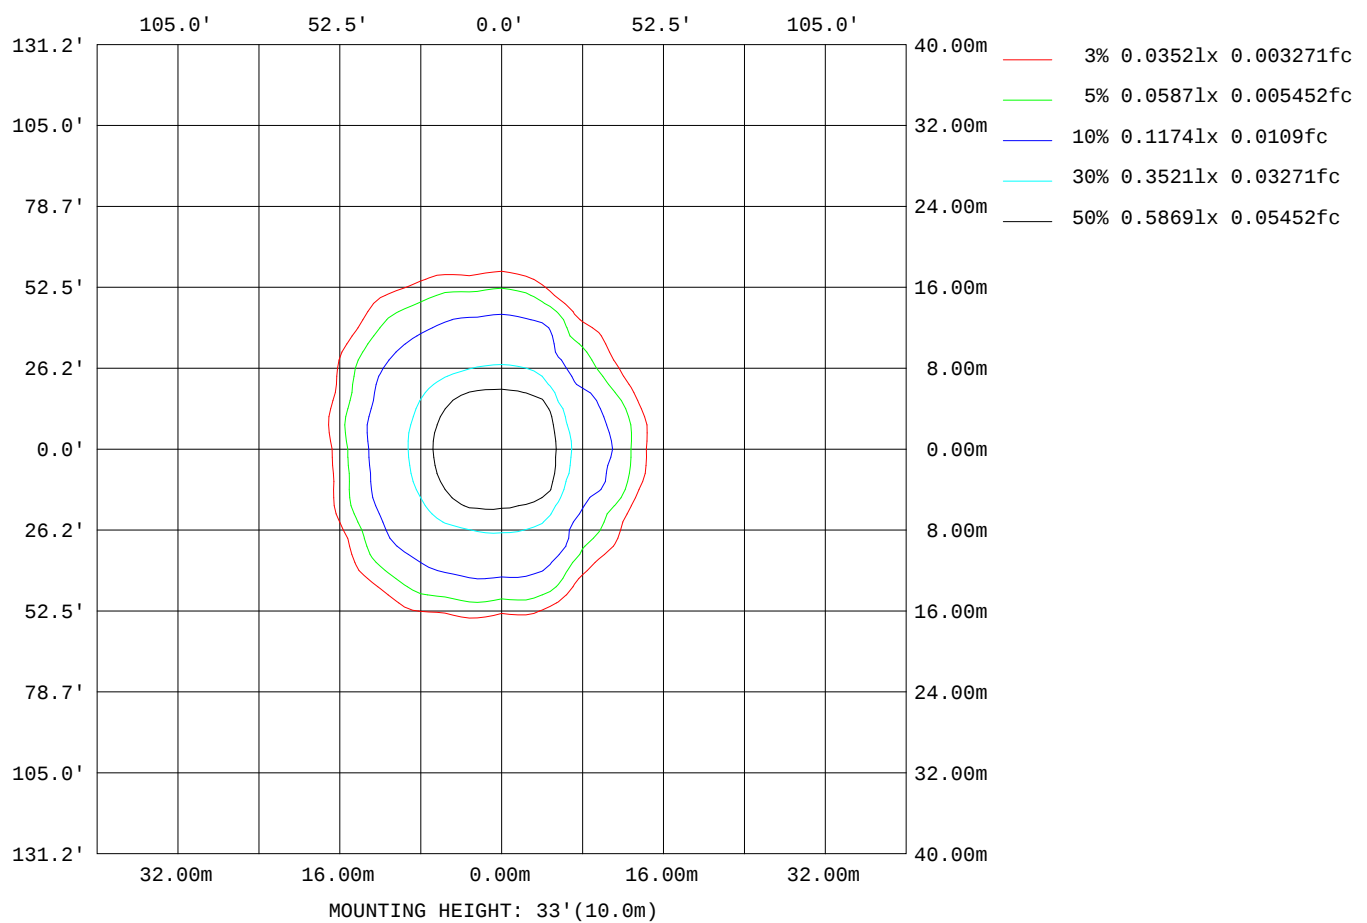


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: YT
Test Date: 2015-04-10

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity: 65.0%
Test Distance: 1.540m [K=1.0000]
Remarks:

AAI Figure

NAME: 250长方LED感应壁灯	TYPE: LG5630	WEIGHT:
DIM.:	SPEC.: 我司驱动	SERIAL No.: 2015041002
MFR.: UTEC	SUR.: PC	PROTECTION ANGLE:

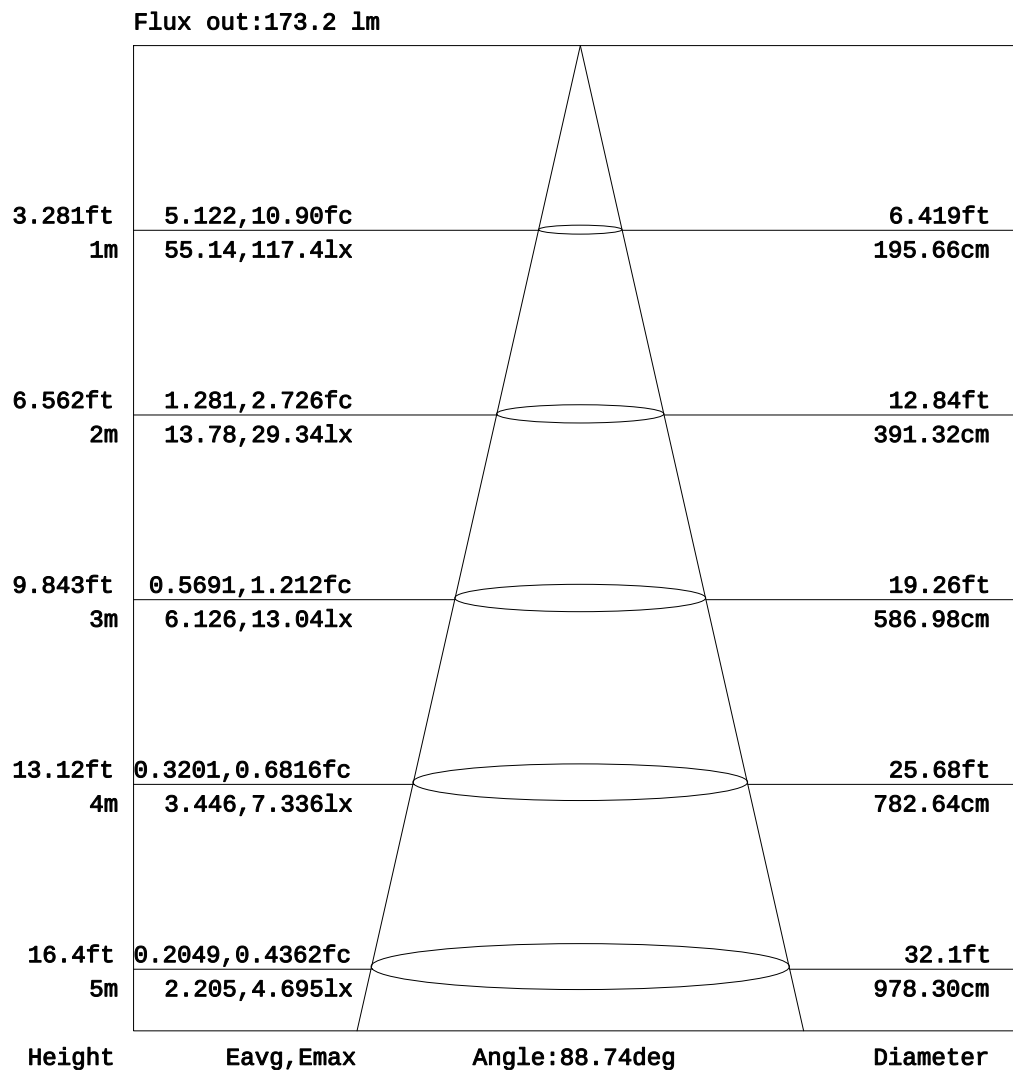


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: YT
Test Date: 2015-04-10

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity: 65.0%
Test Distance: 1.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

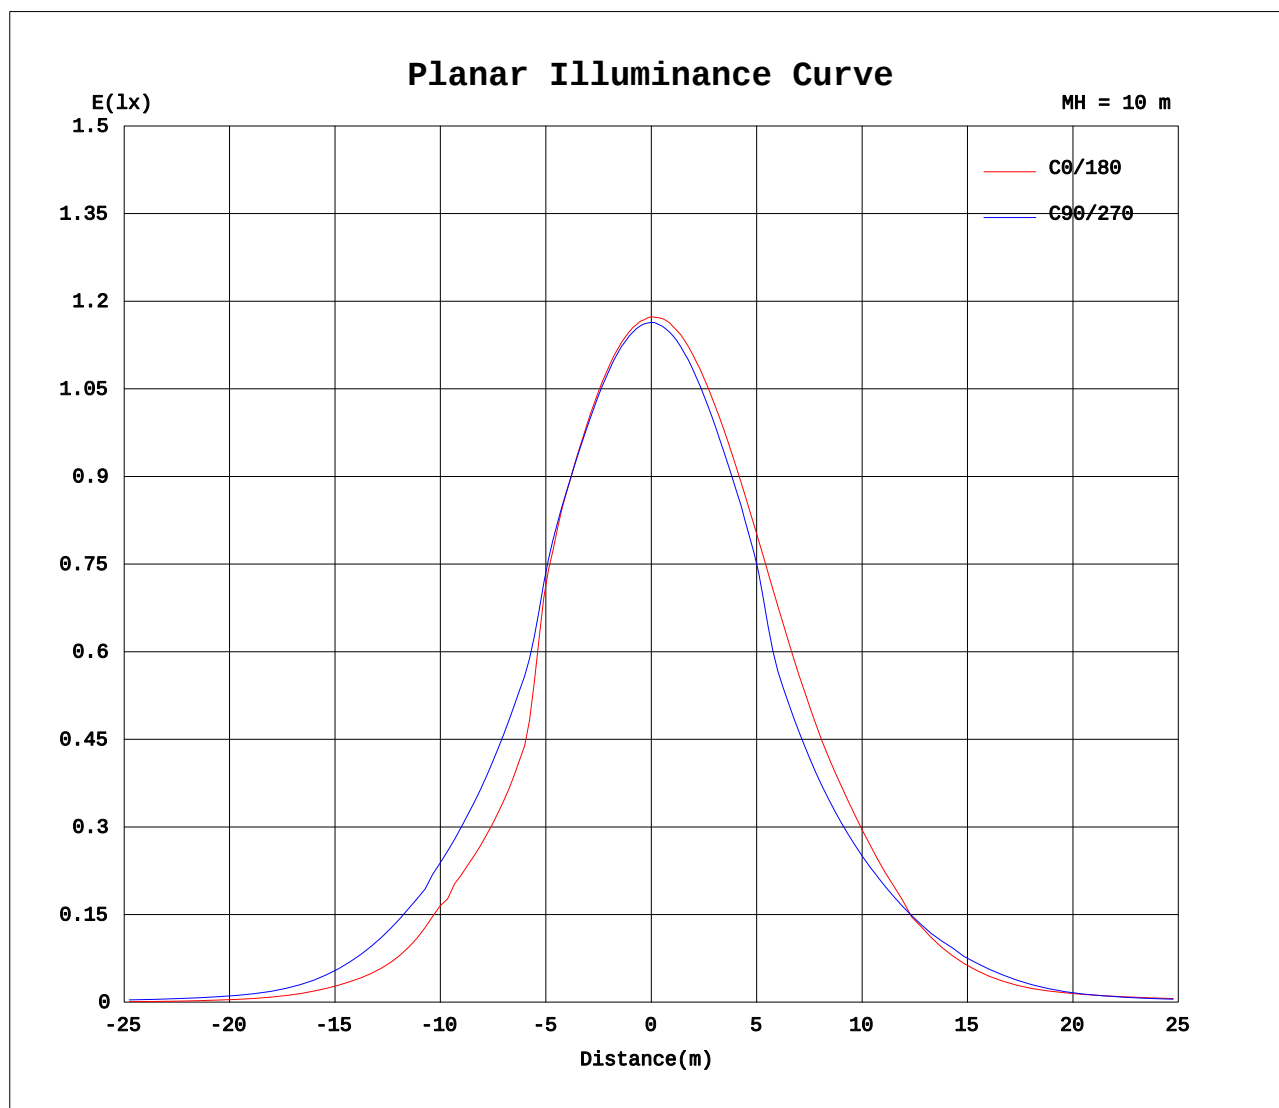

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2015-04-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 250长方LED感应壁灯	TYPE: LG5630	WEIGHT:
DIM.:	SPEC.: 我司驱动	SERIAL No.: 2015041002
MFR.: UTEC	SUR.: PC	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
V(°)	-180	-170	-160	-150	-140	-130	-120	-110	-100	-90	-80	-70	-60	-50	-40	-30	-20	-10	0
-180	1.61	1.38	1.01	0.82	0.57	0.34	0.14	0.09	0.11	0.12	0.14	0.18	0.22	0.18	0.18	0.17	0.17	0.17	0.22
-170	1.61	1.37	1.01	0.80	0.57	0.34	0.17	0.11	0.13	0.16	0.19	0.24	0.35	0.47	0.53	0.54	0.51	0.48	0.43
-160	1.61	1.38	1.01	0.80	0.59	0.38	0.21	0.11	0.12	0.14	0.17	0.20	0.26	0.34	0.45	0.51	0.53	0.53	0.52
-150	1.61	1.39	1.03	0.81	0.64	0.47	0.30	0.17	0.11	0.13	0.14	0.16	0.18	0.22	0.26	0.29	0.38	0.38	0.43
-140	1.61	1.43	1.08	0.85	0.75	0.60	0.44	0.26	0.11	0.10	0.12	0.13	0.15	0.16	0.17	0.18	0.19	0.20	0.22
-130	1.61	1.47	1.16	0.94	0.85	0.77	0.61	0.42	0.25	0.12	0.10	0.11	0.11	0.12	0.13	0.13	0.14	0.15	0.15
-120	1.61	1.50	1.28	1.11	0.99	0.94	0.88	0.75	0.59	0.41	0.19	0.10	0.10	0.10	0.11	0.11	0.11	0.11	0.11
-110	1.61	1.53	1.43	1.35	1.31	1.20	1.19	1.15	1.08	0.91	0.69	0.53	0.42	0.33	0.29	0.30	0.31	0.30	0.29
-100	1.61	1.57	1.53	1.52	1.54	1.50	1.47	1.44	1.41	1.32	1.23	1.13	1.04	0.87	0.70	0.64	0.60	0.57	0.55
-90	1.61	1.61	1.61	1.66	1.70	1.65	1.60	1.61	1.62	1.52	1.42	1.37	1.32	1.19	1.06	0.98	0.89	0.77	0.64
-80	1.61	1.68	1.74	1.89	2.12	2.19	2.22	2.53	2.89	2.86	2.76	2.95	3.17	3.02	2.79	2.90	3.01	2.62	2.19
-70	1.61	1.74	1.92	2.36	3.09	3.61	3.99	4.74	5.75	6.32	6.52	7.00	7.59	7.69	7.47	7.68	7.96	7.51	6.88
-60	1.61	1.82	2.20	3.10	4.36	5.61	6.65	7.97	9.93	11.7	13.0	15.5	20.4	24.0	22.6	22.3	23.6	22.2	19.1
-50	1.61	1.90	2.60	3.93	5.76	8.03	10.1	12.2	15.9	25.6	37.2	45.5	52.1	56.1	56.8	56.5	57.6	56.8	54.0
-40	1.61	1.98	3.04	4.72	7.13	10.2	13.7	18.1	28.5	44.6	62.3	72.2	75.9	79.2	78.8	78.4	78.0	77.4	76.2
-30	1.61	2.07	3.44	5.53	8.30	12.0	16.9	29.0	46.0	64.1	78.4	87.6	94.9	99.5	101	101	96.8	94.7	90.6
-20	1.61	2.14	3.76	6.20	9.42	13.4	19.5	35.6	57.0	76.6	88.1	96.0	103	108	110	111	112	111	111
-10	1.61	2.18	3.96	6.64	10.2	14.6	22.2	40.3	60.9	80.8	91.8	100	107	112	114	115	116	115	115
0	1.61	2.20	4.03	6.80	10.5	15.0	23.5	42.3	66.0	83.5	93.7	102	109	113	116	117	117	118	117
10	1.61	2.21	4.06	6.86	10.6	15.3	24.8	43.9	66.0	83.4	92.9	101	108	112	114	115	115	115	115
20	1.61	2.19	3.94	6.60	10.2	14.6	22.0	38.7	58.2	77.1	88.3	96.5	103	107	110	111	111	111	111
30	1.61	2.14	3.70	6.07	9.18	12.7	17.0	27.6	46.8	66.7	80.6	87.8	93.8	98.3	97.8	97.3	95.5	92.0	92.5
40	1.61	2.06	3.34	5.34	7.48	10.0	13.2	20.0	35.2	51.6	65.3	72.4	74.4	76.7	77.7	78.2	77.8	77.3	77.7
50	1.61	1.97	2.91	4.31	5.72	7.41	10.1	13.4	18.1	27.2	39.8	50.3	55.3	57.9	60.8	62.5	61.0	61.1	62.0
60	1.61	1.88	2.49	3.28	4.12	5.27	7.01	8.88	10.1	11.3	15.3	21.9	24.5	27.0	30.1	30.5	27.9	28.9	30.6
70	1.61	1.80	2.13	2.44	2.77	3.46	4.36	4.95	5.33	6.08	7.01	7.43	7.46	7.96	8.68	8.55	7.97	8.11	8.28
80	1.61	1.73	1.86	1.92	1.95	2.18	2.49	2.53	2.50	2.74	3.00	2.91	2.75	2.95	3.19	2.88	2.49	2.54	2.58
90	1.61	1.66	1.71	1.66	1.62	1.64	1.66	1.57	1.48	1.45	1.42	1.29	1.15	1.08	1.00	0.86	0.71	0.65	0.60
100	1.61	1.61	1.59	1.54	1.51	1.48	1.47	1.40	1.34	1.27	1.19	1.03	0.86	0.75	0.64	0.58	0.54	0.52	0.51
110	1.61	1.56	1.48	1.37	1.25	1.19	1.22	1.14	0.98	0.82	0.69	0.51	0.35	0.31	0.33	0.31	0.30	0.30	0.31
120	1.61	1.53	1.35	1.18	0.98	0.89	0.88	0.76	0.50	0.29	0.16	0.10	0.09	0.09	0.10	0.09	0.09	0.10	0.10
130	1.61	1.49	1.25	1.01	0.83	0.67	0.55	0.40	0.21	0.09	0.09	0.09	0.09	0.09	0.10	0.11	0.11	0.12	0.11
140	1.61	1.44	1.16	0.90	0.74	0.54	0.34	0.20	0.09	0.09	0.09	0.10	0.11	0.12	0.14	0.13	0.14	0.15	0.15
150	1.61	1.41	1.09	0.85	0.68	0.46	0.25	0.10	0.09	0.10	0.11	0.12	0.14	0.15	0.17	0.20	0.22	0.23	0.23
160	1.61	1.39	1.04	0.83	0.62	0.40	0.21	0.09	0.10	0.11	0.13	0.14	0.16	0.22	0.21	0.19	0.17	0.18	0.18
170	1.61	1.38	1.02	0.81	0.58	0.36	0.16	0.09	0.11	0.12	0.14	0.16	0.22	0.19	0.18	0.18	0.17	0.17	0.17
180	1.61	1.38	1.01	0.82	0.57	0.34	0.14	0.09	0.11	0.12	0.14	0.18	0.22	0.18	0.18	0.17	0.17	0.17	0.22

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2015-04-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 250长方LED感应壁灯	TYPE: LG5630	WEIGHT:
DIM.:	SPEC.: 我司驱动	SERIAL No.: 2015041002
MFR.: UTEC	SUR.: PC	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.29	0.42	0.53	0.55	0.52	0.43	0.27	0.22	0.18	0.16	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.07	
-170	0.45	0.51	0.54	0.53	0.50	0.38	0.27	0.22	0.19	0.16	0.14	0.12	0.11	0.10	0.09	0.08	0.07	0.07	
-160	0.53	0.53	0.52	0.48	0.38	0.29	0.22	0.19	0.17	0.15	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.07	
-150	0.39	0.39	0.31	0.27	0.24	0.20	0.18	0.16	0.15	0.13	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.07	
-140	0.21	0.21	0.20	0.18	0.18	0.17	0.15	0.14	0.13	0.12	0.11	0.10	0.10	0.09	0.08	0.08	0.07	0.07	
-130	0.15	0.14	0.14	0.14	0.13	0.13	0.12	0.12	0.11	0.11	0.11	0.10	0.09	0.09	0.08	0.07	0.07	0.07	
-120	0.12	0.12	0.12	0.11	0.12	0.12	0.11	0.10	0.10	0.10	0.10	0.09	0.09	0.08	0.08	0.07	0.07	0.07	
-110	0.29	0.29	0.27	0.26	0.25	0.25	0.22	0.19	0.17	0.15	0.13	0.10	0.09	0.08	0.08	0.07	0.07	0.07	
-100	0.54	0.53	0.50	0.48	0.46	0.44	0.39	0.34	0.30	0.25	0.19	0.13	0.11	0.09	0.08	0.07	0.07	0.07	
-90	0.64	0.64	0.59	0.55	0.52	0.49	0.45	0.41	0.36	0.31	0.24	0.17	0.13	0.10	0.08	0.06	0.07	0.07	
-80	2.08	1.94	1.59	1.26	1.15	1.05	0.88	0.72	0.66	0.58	0.42	0.28	0.20	0.13	0.09	0.07	0.07	0.07	
-70	6.95	6.75	5.09	3.71	3.21	2.74	2.28	1.90	1.67	1.37	0.97	0.66	0.48	0.28	0.12	0.07	0.06	0.07	
-60	20.3	19.6	15.0	11.1	8.47	6.30	4.65	3.94	3.38	2.58	1.82	1.33	0.96	0.50	0.17	0.07	0.06	0.07	
-50	55.0	53.8	50.1	36.0	23.7	18.5	14.7	11.8	7.69	4.41	2.96	2.18	1.55	0.77	0.20	0.08	0.06	0.07	
-40	76.3	75.4	73.6	69.8	45.7	28.9	25.1	20.8	14.6	8.73	4.94	3.16	2.04	1.08	0.25	0.08	0.06	0.07	
-30	90.6	88.7	87.8	83.7	70.5	42.6	32.5	26.2	22.0	15.0	8.26	4.22	2.43	1.35	0.39	0.09	0.06	0.07	
-20	111	110	108	105	94.8	66.0	51.0	40.8	35.0	23.1	13.2	5.26	2.72	1.44	0.43	0.09	0.06	0.07	
-10	115	114	112	109	103	73.8	60.7	49.2	37.1	28.1	17.9	7.36	3.32	1.42	0.35	0.09	0.06	0.07	
0	117	116	114	111	104	74.3	62.7	55.9	46.9	30.4	18.8	9.29	3.75	1.28	0.19	0.08	0.06	0.07	
10	114	114	112	109	99.8	69.4	60.0	52.3	39.7	29.1	18.8	8.93	3.58	1.39	0.29	0.08	0.06	0.07	
20	110	110	108	104	90.2	65.1	52.5	40.4	32.7	24.4	14.1	6.56	3.01	1.35	0.30	0.08	0.06	0.07	
30	90.7	91.4	88.7	85.6	65.1	37.9	35.0	29.3	22.8	14.8	7.33	4.12	2.35	1.18	0.23	0.08	0.06	0.07	
40	77.0	76.4	73.4	58.3	36.3	28.5	23.8	19.1	14.4	9.19	4.85	2.80	1.81	0.85	0.14	0.07	0.06	0.07	
50	59.8	58.3	56.6	37.7	23.1	20.8	16.9	11.7	7.32	4.72	3.15	2.09	1.27	0.53	0.13	0.07	0.06	0.07	
60	27.8	23.5	17.2	12.8	9.47	7.52	6.14	4.37	3.11	2.43	1.91	1.32	0.75	0.30	0.10	0.06	0.06	0.07	
70	7.06	5.75	4.75	3.86	3.12	2.56	2.34	2.00	1.50	1.14	0.93	0.68	0.35	0.13	0.08	0.06	0.06	0.07	
80	2.04	1.49	1.40	1.29	1.06	0.86	0.82	0.76	0.59	0.44	0.37	0.29	0.17	0.08	0.07	0.07	0.06	0.07	
90	0.56	0.53	0.50	0.48	0.45	0.41	0.38	0.34	0.29	0.23	0.18	0.13	0.10	0.07	0.07	0.07	0.07	0.07	
100	0.48	0.46	0.44	0.42	0.39	0.35	0.32	0.29	0.22	0.16	0.13	0.09	0.08	0.06	0.07	0.07	0.07	0.07	
110	0.28	0.25	0.25	0.24	0.22	0.19	0.17	0.15	0.12	0.10	0.09	0.08	0.08	0.07	0.06	0.07	0.07	0.07	
120	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.07	0.07	0.08	0.07	0.06	0.07	0.07	
130	0.12	0.12	0.12	0.12	0.12	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.07	0.07	0.07	0.07	
140	0.15	0.15	0.15	0.15	0.14	0.13	0.12	0.12	0.11	0.10	0.10	0.09	0.09	0.08	0.07	0.07	0.07	0.07	
150	0.23	0.22	0.20	0.18	0.17	0.15	0.15	0.14	0.12	0.11	0.11	0.10	0.09	0.08	0.08	0.08	0.07	0.07	
160	0.18	0.18	0.20	0.22	0.22	0.18	0.16	0.15	0.14	0.12	0.11	0.10	0.09	0.09	0.08	0.08	0.07	0.07	
170	0.17	0.17	0.18	0.19	0.20	0.23	0.18	0.15	0.14	0.13	0.12	0.11	0.10	0.10	0.09	0.08	0.07	0.07	
180	0.29	0.42	0.53	0.55	0.52	0.43	0.27	0.22	0.18	0.16	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.07	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:YT
Test Date:2015-04-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.0.275
Humidity:65.0%
Test Distance:1.540m [K=1.0000]
Remarks: