

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

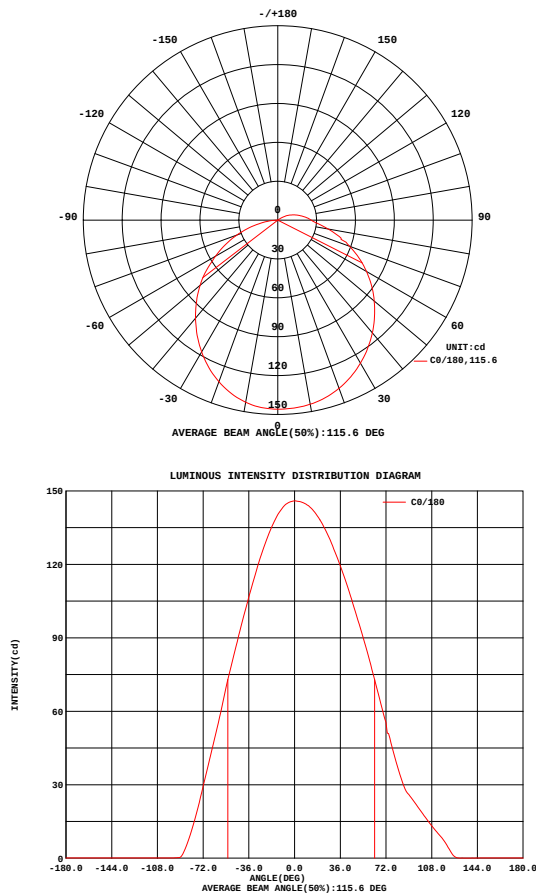


Fig. C0/C180

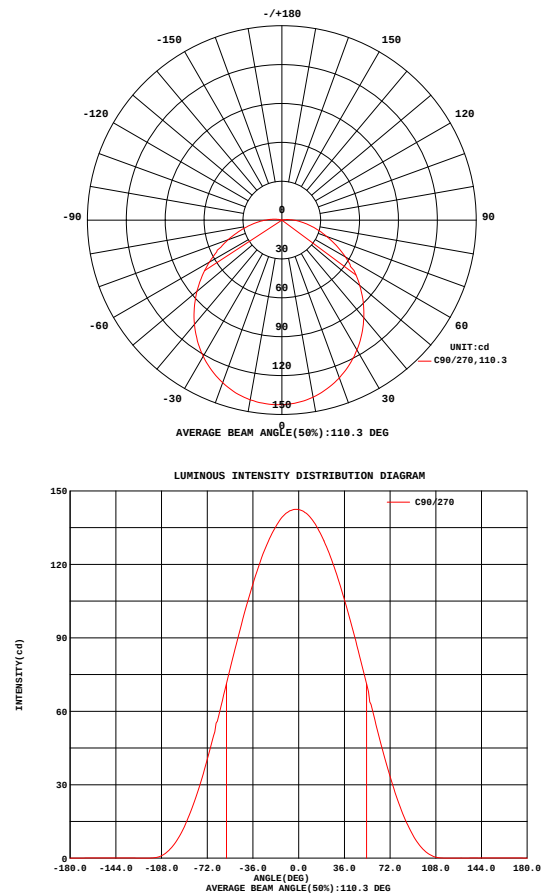


Fig. C90/C270

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:yt
Test Date:2020-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.593m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		328.4 cd per klm. 0.0 degrees vertical 1.0 degrees horizontal
Beam Spread	At 10% of Imax	173.4V x 169.2H
	At 50% of Imax	108.7V x 115.6H
	At 90% of Imax	40.5V x 47.8H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	968.3 lumens per klm.
	To 50% of Imax	666.2 lumens per klm.
	To 90% of Imax	131.7 lumens per klm.
Upward LOR		3.5 %
Downward LOR		96.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:yt
 Test Date:2020-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity:65.0%
 Test Distance:1.593m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: 120弧面LED感应太阳能灯	TYPE:6925701345	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A2020011601
MFR.: UTEC	SUR.:	Shielding Angle:

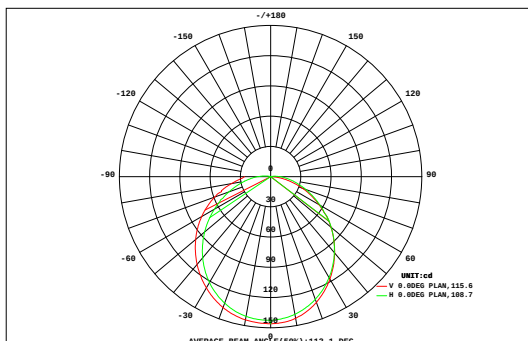

DATA OF LAMP				Eff:81.71lm/W	
MODEL				Imax(cd)	145.9
NOMINAL POWER(W)	5.44	AVAILABILITY(%)	96.8		
RATED VOLTAGE(V)	3.2	Avai. FLUX(lm)	430.4		
NOMINAL FLUX(lm)	444.479	LOR(%)	100.0		
LAMPS INSIDE	1	TOTAL FLUX(lm)	444.5		
TEST VOLTAGE(V)	3.2	θ @50%(H,V)	116,109DEG		

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.03	0.08	0.16	0.26	0.36	0.45	0.52	0.56	0.57	0.58	0.58	0.57	0.52	0.44	0.33	0.20	0.07	6.28	5.21
90	0.01	0.05	0.14	0.29	0.46	0.66	0.82	0.96	1.02	1.04	1.04	0.99	0.90	0.76	0.59	0.40	0.22	0.07	10.4	10.2
80	0.01	0.08	0.22	0.45	0.71	1.02	1.27	1.50	1.60	1.62	1.59	1.47	1.29	1.03	0.77	0.48	0.25	0.07	15.4	15.3
70	0.01	0.11	0.30	0.63	0.99	1.41	1.78	2.09	2.24	2.26	2.19	1.99	1.70	1.31	0.95	0.57	0.29	0.08	20.9	20.8
60	0.02	0.14	0.39	0.79	1.27	1.79	2.27	2.66	2.86	2.88	2.76	2.48	2.08	1.61	1.12	0.66	0.32	0.08	26.2	26.1
50	0.02	0.16	0.47	0.92	1.51	2.12	2.71	3.16	3.40	3.42	3.26	2.91	2.41	1.85	1.27	0.74	0.35	0.08	30.8	30.7
40	0.02	0.18	0.54	1.04	1.69	2.39	3.04	3.56	3.84	3.85	3.65	3.24	2.68	2.03	1.39	0.82	0.37	0.09	34.4	34.4
30	0.02	0.19	0.57	1.14	1.83	2.58	3.28	3.83	4.13	4.15	3.92	3.47	2.85	2.16	1.48	0.86	0.38	0.09	37.0	36.9
20	0.02	0.19	0.58	1.18	1.91	2.69	3.43	4.00	4.29	4.29	4.06	3.60	2.96	2.25	1.53	0.89	0.39	0.09	38.3	38.3
10	0.02	0.19	0.57	1.15	1.87	2.63	3.37	3.94	4.24	4.27	4.06	3.60	2.96	2.24	1.52	0.88	0.39	0.09	38.0	38.0
0	0.02	0.18	0.54	1.08	1.77	2.51	3.20	3.75	4.05	4.07	3.85	3.42	2.82	2.14	1.46	0.85	0.37	0.09	36.2	36.1
-10	0.02	0.16	0.49	1.01	1.63	2.30	2.94	3.44	3.71	3.73	3.54	3.15	2.60	1.99	1.37	0.79	0.35	0.09	33.3	33.2
-20	0.02	0.14	0.44	0.89	1.42	2.02	2.57	3.01	3.25	3.26	3.10	2.77	2.32	1.77	1.23	0.73	0.33	0.08	29.4	29.3
-30	0.01	0.12	0.37	0.73	1.18	1.67	2.13	2.48	2.68	2.70	2.58	2.34	1.96	1.53	1.06	0.65	0.30	0.08	24.6	24.5
-40	0.01	0.09	0.29	0.56	0.93	1.28	1.65	1.90	2.06	2.07	1.99	1.84	1.55	1.25	0.88	0.56	0.27	0.08	19.3	19.2
-50	0.01	0.07	0.20	0.39	0.65	0.90	1.16	1.32	1.43	1.45	1.41	1.33	1.16	0.96	0.70	0.47	0.25	0.07	13.9	13.8
-60	0.00	0.04	0.12	0.24	0.40	0.56	0.72	0.82	0.89	0.90	0.90	0.87	0.80	0.69	0.54	0.38	0.22	0.07	9.17	8.84
-70	0.00	0.02	0.06	0.13	0.21	0.30	0.37	0.43	0.46	0.47	0.48	0.49	0.49	0.46	0.40	0.31	0.20	0.07	5.37	3.79
-80	0.00	0.02	0.06	0.13	0.21	0.30	0.37	0.43	0.46	0.47	0.48	0.49	0.49	0.46	0.40	0.31	0.20	0.07	5.37	3.79
-90	0.00	0.02	0.06	0.13	0.21	0.30	0.37	0.43	0.46	0.47	0.48	0.49	0.49	0.46	0.40	0.31	0.20	0.07	5.37	3.79
HORIZONTAL (DEG)																				
Φ t	0.24	2.12	6.38	12.8	20.7	29.2	37.2	43.4	46.7	47.0	45.0	40.5	34.1	26.5	18.7	11.4	5.45	1.43	429	---
Φ a	0.00	1.55	5.88	12.3	20.3	28.8	36.8	43.1	46.4	46.8	44.8	40.5	34.1	26.5	18.7	11.4	5.45	1.43	---	425

one-half-peak spread: U:53.0,D:56.4 , L:53.8,R:62.4


NEMA Beam Type: Type 7

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:yt
Test Date:2020-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.593m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 120弧面LED感应太阳能灯	TYPE: 6925701345	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2020011601
MFR.: UTEC	SUR.:	Shielding Angle:

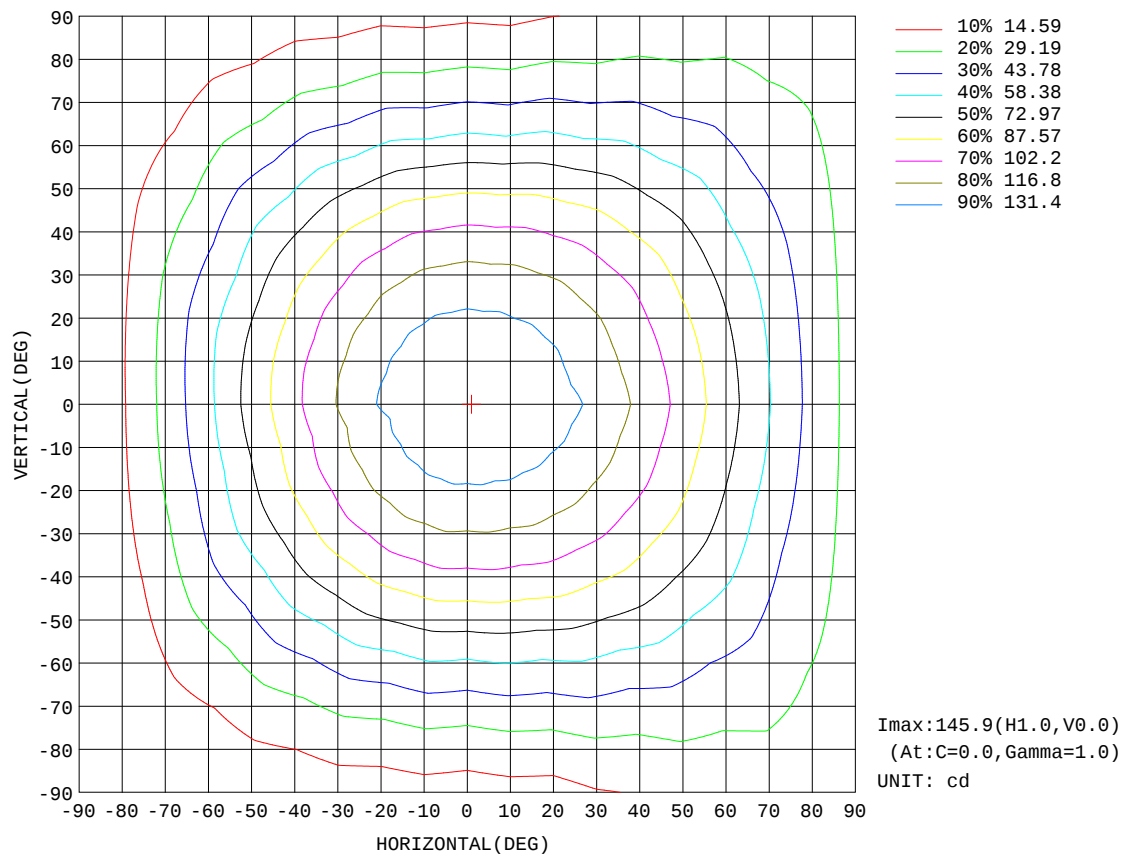


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: yt
Test Date: 2020-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.593m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: 120弧面LED感应太阳能灯	TYPE: 6925701345	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2020011601
MFR.: UTEC	SUR.:	Shielding Angle:

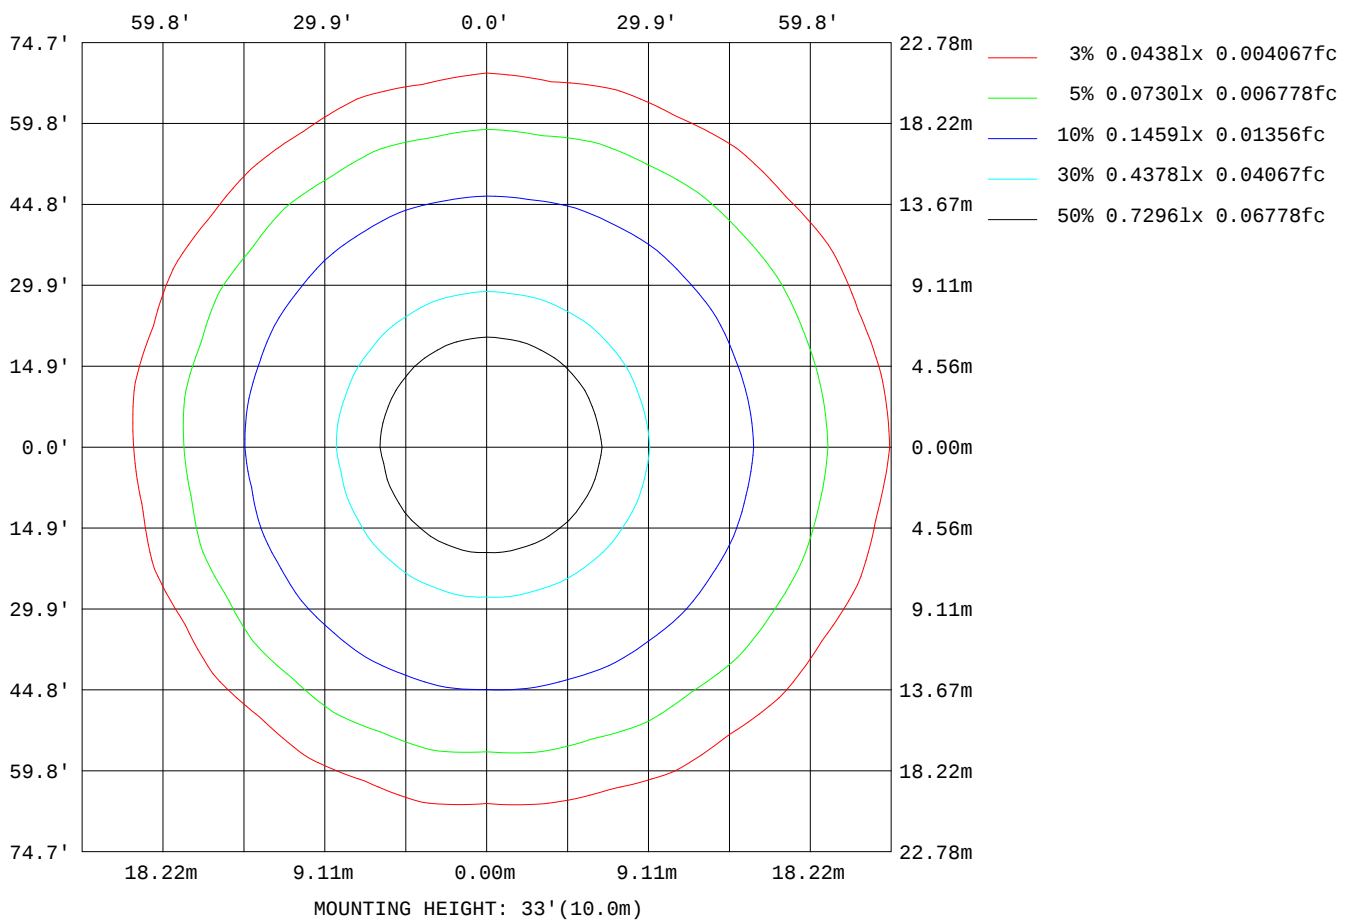

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: yt
Test Date: 2020-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.593m [K=1.0000]
Remarks:

Planar Illuminance Curve

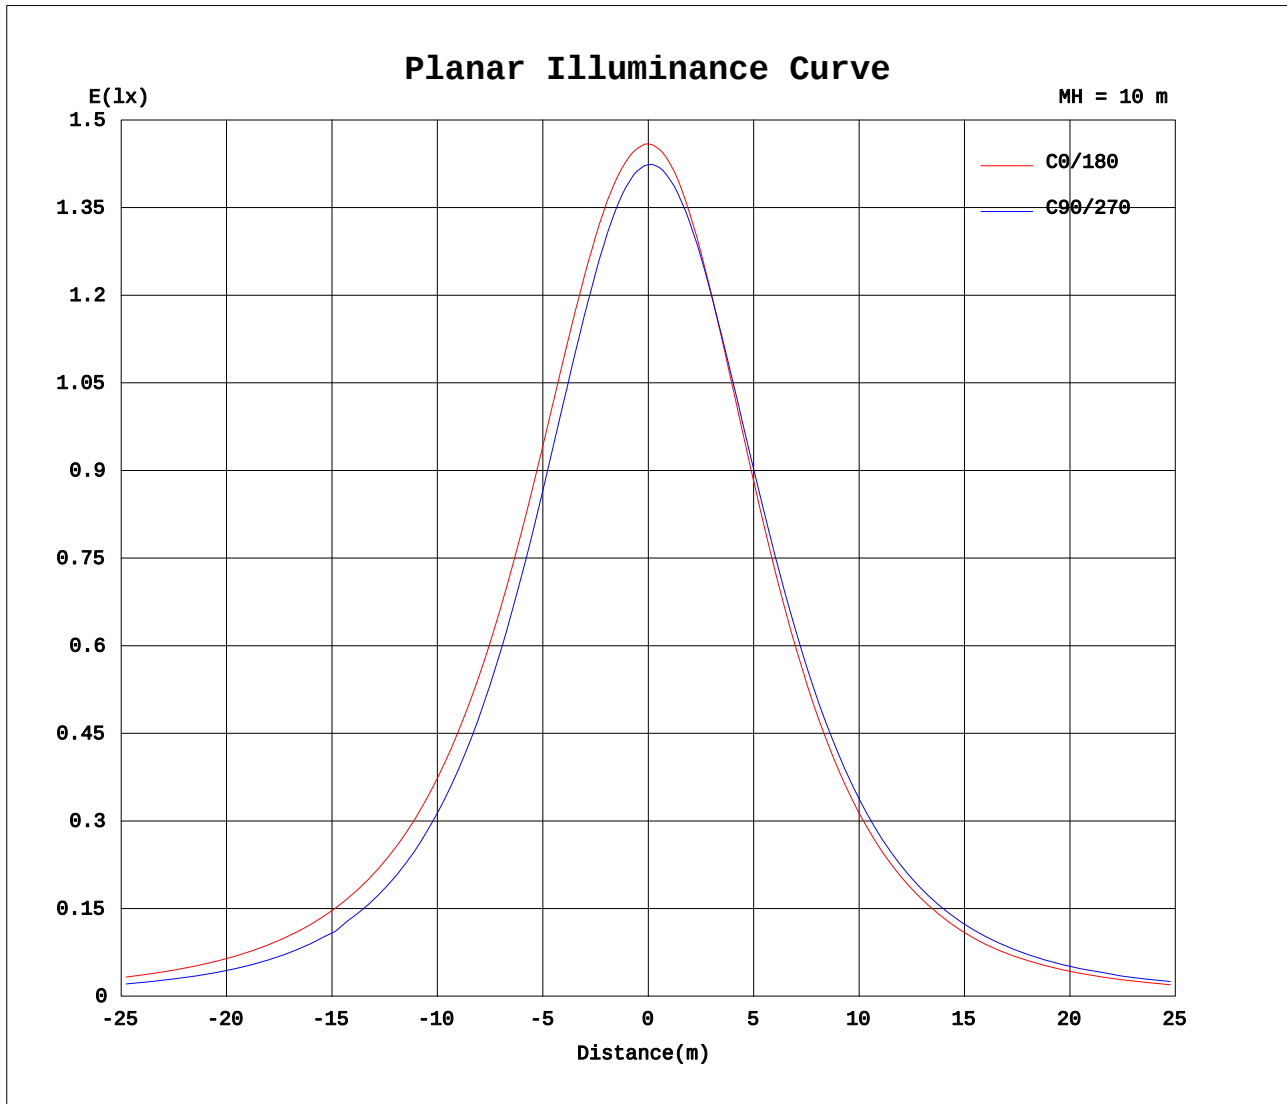


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: yt
 Test Date: 2020-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.593m [K=1.0000]
 Remarks:

AAI Figure

NAME: 120弧面LED感应太阳能灯	TYPE: 6925701345	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2020011601
MFR.: UTEC	SUR.:	Shielding Angle:

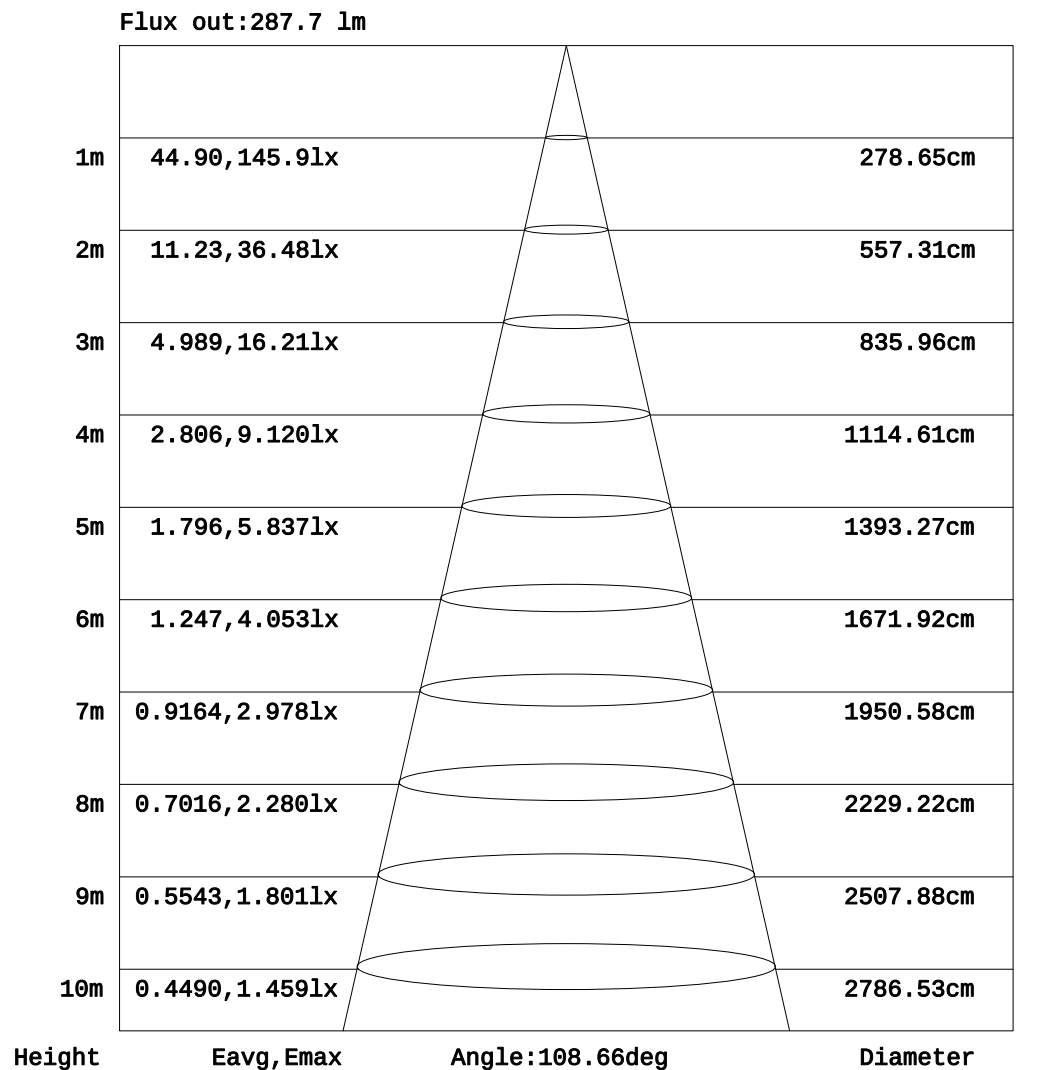

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: yt
 Test Date: 2020-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.593m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 120弧面LED感应太阳能灯	TYPE:6925701345	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A2020011601
MFR.: UTEC	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.36	0.12	0.10	0.11	0.11	0.11	0.10	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.11	0.12	0.12	0.11	0.12
-170	0.36	0.12	0.09	0.09	0.09	0.09	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.08	0.08
-160	0.36	0.12	0.08	0.07	0.07	0.06	0.05	0.05	0.06	0.06	0.07	0.08	0.07	0.08	0.09	0.09	0.09	0.09	0.08
-150	0.36	0.13	0.08	0.06	0.05	0.05	0.06	0.06	0.06	0.06	0.07	0.06	0.06	0.07	0.08	0.07	0.08	0.08	0.07
-140	0.36	0.14	0.07	0.05	0.05	0.05	0.05	0.06	0.06	0.06	0.06	0.05	0.06	0.06	0.06	0.07	0.07	0.06	0.07
-130	0.36	0.16	0.07	0.06	0.05	0.05	0.05	0.05	0.06	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.06
-120	0.36	0.20	0.09	0.08	0.06	0.06	0.05	0.05	0.06	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.05
-110	0.36	0.27	0.13	0.25	0.20	0.18	0.12	0.22	0.26	0.21	0.19	0.25	0.30	0.27	0.23	0.27	0.33	0.28	0.22
-100	0.36	0.40	0.32	0.74	0.98	1.02	1.04	1.50	1.90	1.91	1.92	2.34	2.76	2.66	2.56	2.86	3.20	2.93	2.67
-90	0.36	0.62	0.89	1.84	2.80	3.17	3.55	4.75	5.96	6.27	6.59	7.69	8.79	8.78	8.77	9.55	10.3	9.86	9.38
-80	0.36	1.04	1.94	3.76	5.75	6.91	7.97	10.2	12.6	13.7	14.6	16.6	18.7	19.1	19.3	20.7	22.0	21.6	20.9
-70	0.36	1.64	3.40	6.32	9.68	12.3	14.4	17.7	21.5	24.1	25.9	28.7	31.9	33.5	34.1	36.0	38.0	37.7	36.9
-60	0.36	2.33	5.19	9.35	14.3	18.8	22.5	26.5	32.0	37.0	40.0	43.1	47.7	50.5	52.5	54.5	57.1	57.4	56.5
-50	0.36	3.05	7.14	12.4	18.9	25.8	31.3	36.4	42.6	49.3	54.8	58.9	63.7	69.1	72.4	74.8	77.5	78.7	78.5
-40	0.36	3.74	9.02	15.3	23.1	31.4	39.7	46.4	52.9	60.3	68.2	74.8	80.2	85.7	90.7	93.8	96.6	98.6	98.4
-30	0.36	4.35	10.7	18.2	26.5	36.0	45.5	55.0	63.1	71.3	79.0	87.1	94.6	100	106	111	113	116	116
-20	0.36	4.82	12.0	20.5	29.9	39.5	49.4	59.7	70.1	79.7	88.6	96.7	104	112	118	123	127	129	130
-10	0.36	5.11	12.8	22.1	32.4	42.8	53.2	63.8	74.5	84.1	93.8	103	112	120	126	131	136	138	139
0	0.36	5.21	13.1	22.8	33.5	44.4	55.3	67.1	78.2	88.6	98.8	108	118	126	133	139	143	145	146
10	0.36	5.31	13.3	23.1	33.8	44.7	55.6	66.5	77.1	87.4	97.1	106	115	122	129	134	138	140	141
20	0.36	5.20	13.0	22.4	32.7	43.2	53.5	62.6	72.6	82.0	91.3	100	109	115	121	127	130	133	134
30	0.36	4.89	12.1	20.8	30.2	38.7	47.3	55.8	64.6	74.9	83.4	90.9	97.8	105	111	115	119	120	121
40	0.36	4.39	10.8	18.5	25.6	32.7	40.0	48.7	57.7	64.7	71.9	78.7	85.4	90.8	95.2	99.7	102	104	105
50	0.36	3.77	9.10	14.9	20.4	25.9	33.3	40.8	47.1	52.2	58.0	64.5	69.8	73.8	78.0	81.7	83.1	84.4	85.6
60	0.36	3.07	7.17	11.2	15.0	19.7	25.7	31.1	35.0	39.0	44.6	49.3	51.6	54.9	58.8	61.1	61.5	63.0	64.5
70	0.36	2.35	5.23	7.65	9.91	13.6	17.8	20.9	23.3	26.8	30.9	33.4	34.9	37.6	40.6	41.4	41.3	42.7	44.0
80	0.36	1.68	3.43	4.65	5.78	8.27	11.0	12.4	13.6	16.1	18.8	19.8	20.6	22.5	24.4	24.5	24.3	25.3	26.3
90	0.36	1.17	1.97	2.40	2.83	4.22	5.61	6.09	6.56	8.02	9.48	9.67	9.86	11.0	12.2	11.9	11.6	12.2	12.8
100	0.36	0.84	0.98	1.01	1.05	1.63	2.11	2.19	2.24	2.81	3.39	3.34	3.28	3.75	4.26	4.02	3.77	4.04	4.37
110	0.36	0.59	0.41	0.34	0.26	0.42	0.48	0.42	0.36	0.45	0.56	0.51	0.44	0.52	0.63	0.54	0.45	0.49	0.57
120	0.36	0.41	0.18	0.14	0.09	0.11	0.10	0.08	0.07	0.06	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06
130	0.36	0.28	0.13	0.09	0.09	0.08	0.09	0.09	0.08	0.08	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.07
140	0.36	0.21	0.11	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.07	0.07	0.07	0.07	0.06	0.07	0.08	0.08	0.08
150	0.36	0.16	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.10	0.10	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.09
160	0.36	0.14	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.10	0.09
170	0.36	0.13	0.10	0.11	0.11	0.10	0.10	0.11	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.06
180	0.36	0.12	0.10	0.11	0.11	0.11	0.10	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.11	0.12	0.12	0.11	0.07

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:yt
Test Date:2020-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.593m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 120弧面LED感应太阳能灯	TYPE:6925701345	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A2020011601
MFR.: UTEC	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.09	0.09	0.09	0.09	0.08	0.08	0.06	0.07	0.06	0.06	1.14	5.28	8.95	12.0	15.3	18.8	22.5	26.0	
-170	0.08	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.18	1.17	4.88	8.62	11.7	15.0	18.6	22.4	26.0	
-160	0.09	0.09	0.10	0.09	0.09	0.08	0.08	0.07	0.23	0.71	1.96	5.46	8.78	11.8	15.1	18.7	22.4	26.0	
-150	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.59	1.67	3.90	6.95	9.53	12.3	15.5	18.9	22.5	26.0	
-140	0.07	0.07	0.07	0.07	0.08	0.08	0.08	0.46	1.42	2.93	5.54	8.35	10.7	13.3	16.2	19.4	22.8	26.0	
-130	0.06	0.07	0.07	0.07	0.07	0.07	0.35	1.43	2.88	4.66	6.86	9.48	12.3	14.7	17.2	20.1	23.1	26.0	
-120	0.06	0.06	0.06	0.07	0.06	0.33	0.99	2.60	4.65	6.56	8.58	11.1	13.9	16.3	18.5	20.9	23.5	26.0	
-110	0.27	0.31	0.25	0.24	0.55	1.26	2.66	4.43	6.78	9.05	11.0	13.1	15.7	18.2	20.0	21.9	23.9	26.0	
-100	2.91	3.17	2.88	2.72	4.13	5.66	6.97	8.40	10.7	13.0	14.5	16.0	18.3	20.5	21.8	22.9	24.5	26.0	
-90	9.99	10.6	10.5	10.3	12.1	13.8	14.5	15.2	17.2	19.1	19.7	20.3	21.9	23.5	23.8	24.1	25.0	26.0	
-80	22.0	22.9	22.8	22.6	24.3	25.6	25.3	25.2	26.5	27.4	26.8	26.2	26.8	27.2	26.3	25.5	25.6	26.0	
-70	38.3	39.3	38.8	38.5	39.9	40.2	38.8	38.0	38.2	37.4	35.3	33.6	32.9	31.6	29.2	27.2	26.3	26.0	
-60	57.9	58.4	57.5	57.2	57.7	56.4	53.7	52.7	51.7	48.6	44.8	42.3	39.9	36.5	32.4	29.2	27.1	26.0	
-50	79.3	79.1	77.9	77.5	76.4	73.6	71.0	68.2	64.4	59.7	55.2	51.5	47.4	41.5	35.8	31.4	27.9	26.0	
-40	99.0	98.2	97.0	96.1	93.0	89.7	86.4	82.1	76.9	71.5	65.7	60.4	53.5	46.1	39.0	33.5	28.8	26.0	
-30	116	115	114	111	108	104	99.1	93.3	87.6	81.5	74.9	67.2	58.6	50.1	42.5	35.6	29.6	26.0	
-20	130	129	126	124	120	115	109	103	96.5	89.0	81.0	72.5	62.6	54.1	45.5	37.3	30.2	26.0	
-10	138	137	135	132	128	123	116	109	102	93.8	85.4	76.6	66.9	57.2	47.7	38.6	30.7	26.0	
0	146	144	142	138	133	127	121	114	106	97.1	88.4	79.0	69.1	59.0	49.1	39.4	31.0	26.0	
10	140	139	137	133	128	123	117	110	103	94.8	86.4	77.5	67.9	58.1	48.5	39.1	30.9	26.0	
20	133	132	130	127	122	118	112	105	97.6	90.1	82.3	73.9	65.1	56.1	47.0	38.2	30.5	26.0	
30	120	120	118	116	112	107	103	97.2	90.7	83.5	76.0	68.6	60.4	52.5	44.6	36.7	30.0	26.0	
40	104	104	103	101	98.3	95.0	90.3	85.6	80.9	75.2	68.7	60.8	54.3	48.1	41.6	34.9	29.2	26.0	
50	85.1	84.9	85.0	83.3	81.1	79.4	76.4	72.4	68.4	64.1	59.5	53.7	47.4	42.6	37.8	32.8	28.4	26.0	
60	63.5	63.1	64.4	64.2	62.3	61.1	60.3	57.6	54.0	51.9	49.5	45.4	40.7	36.9	33.8	30.6	27.6	26.0	
70	43.4	42.8	44.5	45.3	44.2	43.5	44.0	43.4	41.1	39.4	38.6	37.1	34.1	31.5	30.0	28.6	26.9	26.0	
80	25.8	25.3	27.0	28.3	28.0	27.8	29.1	30.1	29.2	28.5	29.1	29.4	28.1	26.9	26.8	26.7	26.2	26.0	
90	12.4	12.0	13.3	14.5	14.9	15.3	17.1	19.0	19.4	19.8	21.4	23.0	23.1	23.2	24.2	25.2	25.6	26.0	
100	4.02	3.73	4.22	4.80	5.65	6.64	8.75	10.9	12.2	13.6	15.8	18.0	19.2	20.4	22.2	23.9	25.0	26.0	
110	0.46	0.38	0.44	0.58	0.94	1.83	3.85	5.86	7.66	9.71	12.2	14.6	16.4	18.3	20.6	22.8	24.4	26.0	
120	0.05	0.05	0.05	0.06	0.06	0.62	1.79	3.29	5.02	7.28	9.85	12.0	14.1	16.5	19.2	21.8	23.9	26.0	
130	0.07	0.07	0.07	0.06	0.07	0.08	0.53	1.66	3.32	5.57	7.81	9.88	12.3	15.0	18.0	20.8	23.5	26.0	
140	0.08	0.08	0.08	0.09	0.08	0.07	0.08	0.63	1.92	3.63	5.89	8.20	10.9	13.9	17.1	20.1	23.1	26.0	
150	0.09	0.09	0.09	0.10	0.09	0.08	0.07	0.21	0.78	1.68	3.64	7.12	10.0	13.1	16.2	19.4	22.8	26.0	
160	0.10	0.11	0.10	0.11	0.08	0.06	0.06	0.06	0.17	0.70	2.51	6.31	9.46	12.4	15.6	19.0	22.6	26.0	
170	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.06	0.25	1.55	5.51	8.98	12.0	15.3	18.8	22.5	26.0	
180	0.09	0.09	0.09	0.09	0.08	0.08	0.06	0.07	0.06	0.06	1.14	5.28	8.95	12.0	15.3	18.8	22.5	26.0	

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:yt
Test Date:2020-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.593m [K=1.0000]
Remarks: