

## 灯具配光曲线及特征面照片

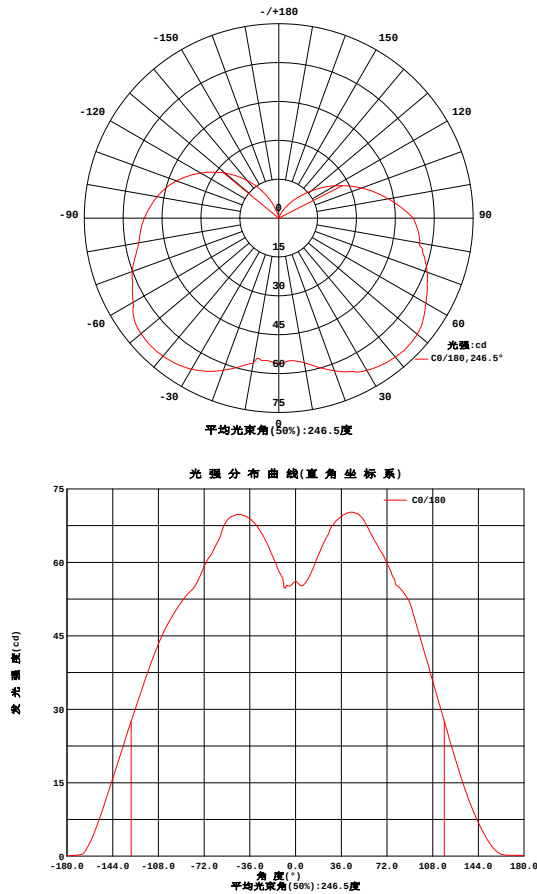


Fig. C0/C180

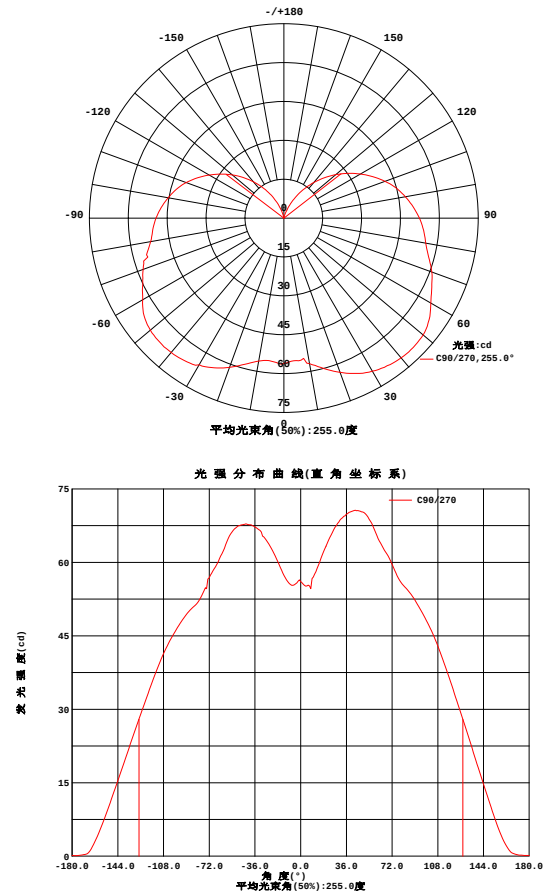


Fig. C90/C270

C角度范围: 0度 - 360度  
C角度间隔: 10.0度  
测试速度: 快速  
环境温度: 25.3°C  
测试人员: DAMIN  
测试日期: 2020-12-19


γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-R3000(2M2D)系统 V2.00.416  
环境湿度: 65.0%  
测试距离: 1.615米 [K=1.0000]  
备注:

## 室内灯具光度数据


|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

| 光源数据      |         | 光度数据     |        |                         |            | 光效: 64.12 lm/W |
|-----------|---------|----------|--------|-------------------------|------------|----------------|
| 型号        | 6500K   | 峰值光强(cd) | 70.70  | S/MH(C0/180)            | 1.83       |                |
| 标称功率(W)   | 8.96    | 灯具效率(%)  | 100.0  | S/MH(C90/270)           | 1.79       |                |
| 额定电源电压(V) | 230     | 总光通量(lm) | 574.97 | $\eta$ UP, DN(C0-180)   | 16.3, 34.3 |                |
| 额定光通量(lm) | 574.968 | CIE分类    | 半直接    | $\eta$ UP, DN(C180-360) | 16.1, 33.4 |                |
| 灯具内光源数(只) | 1       | 上射光通比(%) | 32.3   | CIBSE SHR NOM           | 2.00       |                |
| 实测电源电压(V) | 230     | 下射光通比(%) | 67.7   | CIBSE SHR MAX           | 2.00       |                |

室内灯具配光曲线

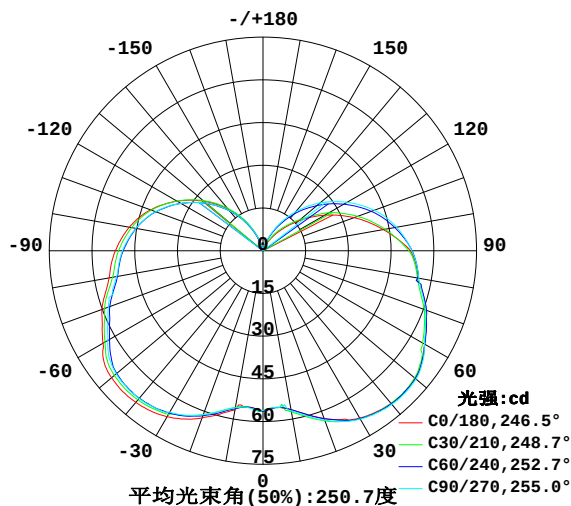

空间等照度曲线(单位: lx)

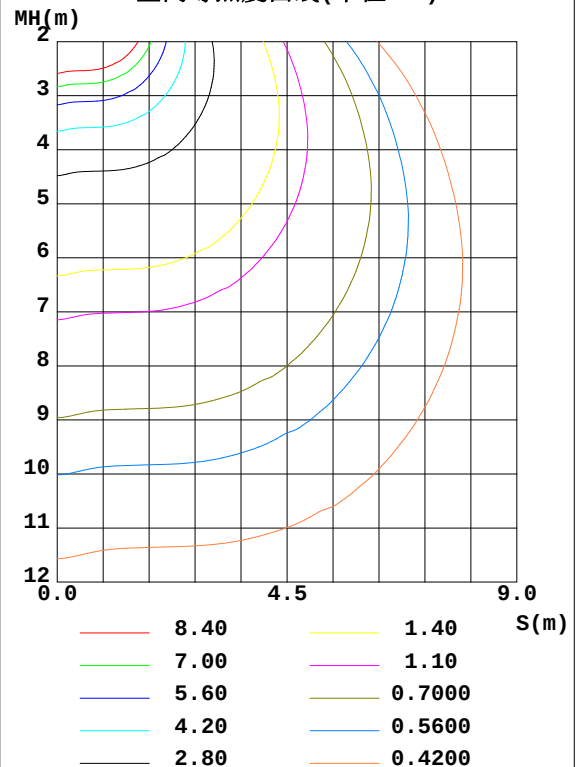

C角度范围: 0度 - 360度  
 C角度间隔: 10.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2020-12-19

Y角度范围: 0度 - 180度  
 Y角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-R3000(2M2D)系统 V2.00.416  
 环境湿度: 65.0%  
 测试距离: 1.615米 [K=1.0000]  
 备注:

## 灯具环带光通量

环带光通量:


| $\gamma$ | C0     | C45    | C90    | C135   | C180   | C225   | C270   | C315   | $\gamma(^{\circ})$ | $\Phi_{\text{环}}$ | $\Phi_{\text{总}}$ | %lum, lamp |
|----------|--------|--------|--------|--------|--------|--------|--------|--------|--------------------|-------------------|-------------------|------------|
| 10       | 56.67  | 57.03  | 57.01  | 56.46  | 56.82  | 56.09  | 56.02  | 56.96  | 0- 10              | 5.316             | 5.316             | 0.92,0.92  |
| 20       | 62.66  | 63.12  | 63.27  | 62.40  | 62.44  | 61.35  | 61.28  | 62.81  | 10- 20             | 16.93             | 22.25             | 3.87,3.87  |
| 30       | 67.78  | 68.05  | 68.21  | 67.70  | 67.30  | 65.81  | 65.35  | 67.47  | 20- 30             | 30.18             | 52.43             | 9.12,9.12  |
| 40       | 70.01  | 70.11  | 70.38  | 69.94  | 69.48  | 67.77  | 67.67  | 69.40  | 30- 40             | 43.07             | 95.50             | 16.6,16.6  |
| 50       | 69.72  | 69.62  | 70.15  | 69.84  | 69.38  | 67.34  | 67.26  | 68.95  | 40- 50             | 53.74             | 149.2             | 26,26      |
| 60       | 65.55  | 65.16  | 65.49  | 65.62  | 64.92  | 62.90  | 62.88  | 64.19  | 50- 60             | 60.26             | 209.5             | 36.4,36.4  |
| 70       | 60.96  | 60.60  | 60.73  | 60.99  | 60.18  | 58.03  | 57.79  | 59.20  | 60- 70             | 61.63             | 271.1             | 47.2,47.2  |
| 80       | 55.19  | 55.15  | 55.58  | 55.67  | 54.85  | 52.59  | 52.20  | 53.73  | 70- 80             | 60.27             | 331.4             | 57.6,57.6  |
| 90       | 51.80  | 51.87  | 52.29  | 52.48  | 51.84  | 49.78  | 49.35  | 50.43  | 80- 90             | 57.71             | 389.1             | 67.7,67.7  |
| 100      | 42.94  | 45.35  | 47.62  | 48.11  | 47.65  | 45.95  | 45.35  | 44.01  | 90-100             | 53.06             | 442.2             | 76.9,76.9  |
| 110      | 34.03  | 38.02  | 41.57  | 42.45  | 42.03  | 40.81  | 40.14  | 36.88  | 100-110            | 45.33             | 487.5             | 84.8,84.8  |
| 120      | 24.98  | 29.86  | 34.10  | 35.16  | 34.83  | 34.03  | 33.31  | 28.96  | 110-120            | 35.53             | 523.0             | 91,91      |
| 130      | 16.37  | 21.59  | 26.15  | 27.32  | 27.08  | 26.65  | 25.97  | 21.20  | 120-130            | 25.15             | 548.2             | 95.3,95.3  |
| 140      | 9.211  | 12.85  | 17.98  | 19.18  | 19.02  | 18.96  | 18.38  | 13.85  | 130-140            | 15.65             | 563.8             | 98.1,98.1  |
| 150      | 3.841  | 6.384  | 9.962  | 11.14  | 11.03  | 11.26  | 10.90  | 7.267  | 140-150            | 7.979             | 571.8             | 99.4,99.4  |
| 160      | 0.6634 | 1.701  | 3.070  | 3.953  | 3.823  | 4.141  | 4.058  | 1.945  | 150-160            | 2.762             | 574.6             | 99.9,99.9  |
| 170      | 0.1892 | 0.2528 | 0.3346 | 0.4110 | 0.2876 | 0.2911 | 0.3585 | 0.2165 | 160-170            | 0.3825            | 574.9             | 100,100    |
| 180      | 0.1384 | 0.1405 | 0.1472 | 0.1352 | 0.1456 | 0.1405 | 0.1357 | 0.1324 | 170-180            | 0.0195            | 575.0             | 100,100    |
| 单位:°     | 光强:cd  |        |        |        |        |        |        |        |                    | 单位:lm             |                   |            |

C角度范围: 0度 - 360度  
 C角度间隔: 10.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2020-12-19

$\gamma$ 角度范围: 0度 - 180度  
 $\gamma$ 角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
 环境湿度: 65.0%  
 测试距离: 1.615米 [K=1.0000]  
 备注:

## 灯具亮度限制曲线

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

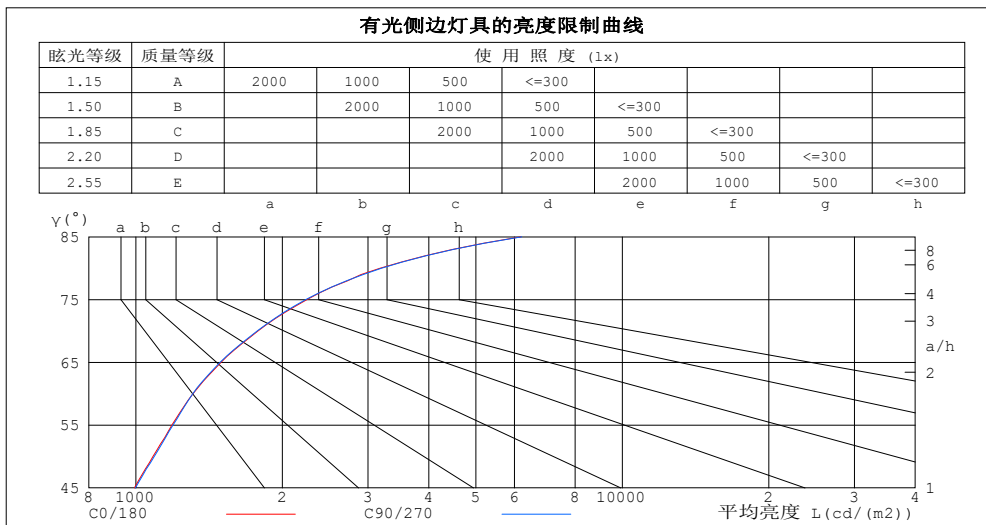


C角度范围: 0度 - 360度  
C角度间隔: 10.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: DAMIN  
测试日期: 2020-12-19

$\gamma$ 角度范围: 0度 - 180度  
 $\gamma$ 角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
环境湿度: 65.0%  
测试距离: 1.615米 [K=1.0000]  
备注:

## 工作面利用系数和灯具概算曲线

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

| 顶棚   | 80%           |      |      | 70%  |      |      | 50% |     |     | 30% |     |     | 10% |     |     | 0   |
|------|---------------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 墙面   | 50%           | 30%  | 10%  | 50%  | 30%  | 10%  | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0   |
| 地板   | 20%           |      |      | 20%  |      |      | 20% |     |     | 20% |     |     | 20% |     |     | 0   |
| 室空间比 | 工 作 面 利 用 系 数 |      |      |      |      |      |     |     |     |     |     |     |     |     |     |     |
| 0.0  | 1.11          | 1.11 | 1.11 | 1.05 | 1.05 | 1.05 | .93 | .93 | .93 | .82 | .82 | .82 | .72 | .72 | .72 | .68 |
| 1.0  | .90           | .84  | .79  | .85  | .79  | .75  | .74 | .70 | .66 | .65 | .62 | .59 | .56 | .54 | .51 | .47 |
| 2.0  | .76           | .68  | .61  | .71  | .64  | .57  | .62 | .56 | .51 | .54 | .49 | .45 | .47 | .43 | .40 | .35 |
| 3.0  | .65           | .56  | .48  | .61  | .53  | .46  | .54 | .47 | .41 | .46 | .41 | .36 | .40 | .35 | .32 | .28 |
| 4.0  | .57           | .47  | .40  | .53  | .44  | .38  | .47 | .39 | .34 | .40 | .34 | .30 | .35 | .30 | .26 | .22 |
| 5.0  | .50           | .40  | .33  | .47  | .38  | .31  | .41 | .34 | .28 | .36 | .30 | .25 | .31 | .26 | .22 | .19 |
| 6.0  | .44           | .35  | .28  | .42  | .33  | .27  | .37 | .29 | .24 | .32 | .26 | .21 | .27 | .22 | .18 | .16 |
| 7.0  | .40           | .31  | .24  | .37  | .29  | .23  | .33 | .26 | .21 | .29 | .23 | .18 | .25 | .20 | .16 | .13 |
| 8.0  | .36           | .27  | .21  | .34  | .26  | .20  | .30 | .23 | .18 | .26 | .20 | .16 | .23 | .18 | .14 | .12 |
| 9.0  | .33           | .24  | .19  | .31  | .23  | .18  | .27 | .21 | .16 | .24 | .18 | .14 | .21 | .16 | .12 | .10 |
| 10.0 | .30           | .22  | .16  | .28  | .21  | .16  | .25 | .19 | .14 | .22 | .16 | .13 | .19 | .14 | .11 | .09 |

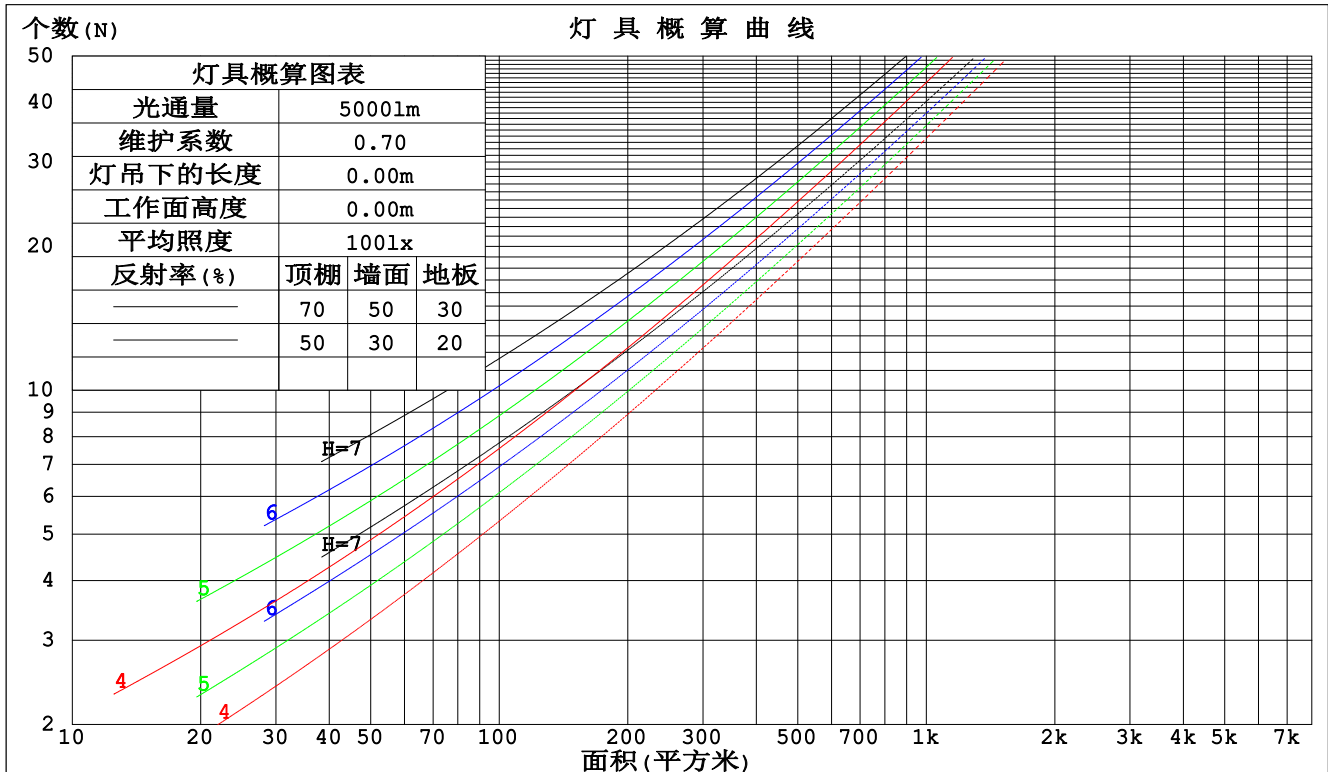

C角度范围: 0度 - 360度  
 C角度间隔: 10.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
 环境湿度: 65.0%  
 测试距离: 1.615米 [K=1.0000]  
 备注:

## 墙面和天花板利用系数

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

|      |                |                |                |                |                |   |
|------|----------------|----------------|----------------|----------------|----------------|---|
| 顶棚   | 80%            | 70%            | 50%            | 30%            | 10%            | 0 |
| 墙面   | 50% 30% 10%    | 50% 30% 10%    | 50% 30% 10%    | 50% 30% 10%    | 50% 30% 10%    | 0 |
| 地板   | 20%            | 20%            | 20%            | 20%            | 20%            | 0 |
| 室空间比 | 墙 壁 面 利 用 系 数  |                |                |                |                |   |
| 0.0  |                |                |                |                |                |   |
| 1.0  | .423 .240 .076 | .405 .231 .073 | .373 .214 .068 | .344 .198 .064 | .317 .184 .059 |   |
| 2.0  | .355 .194 .060 | .339 .187 .058 | .310 .172 .053 | .283 .159 .050 | .258 .146 .046 |   |
| 3.0  | .310 .165 .049 | .296 .158 .048 | .269 .146 .044 | .244 .134 .041 | .221 .123 .038 |   |
| 4.0  | .276 .143 .042 | .263 .138 .041 | .239 .127 .038 | .216 .116 .035 | .195 .106 .032 |   |
| 5.0  | .249 .127 .037 | .237 .122 .035 | .215 .112 .033 | .194 .102 .030 | .175 .093 .028 |   |
| 6.0  | .227 .114 .033 | .216 .109 .031 | .195 .100 .029 | .176 .092 .027 | .158 .083 .025 |   |
| 7.0  | .208 .103 .029 | .198 .099 .028 | .179 .091 .026 | .162 .083 .024 | .145 .075 .022 |   |
| 8.0  | .192 .094 .026 | .183 .090 .025 | .166 .083 .024 | .149 .076 .022 | .134 .069 .020 |   |
| 9.0  | .179 .086 .024 | .170 .083 .023 | .154 .076 .022 | .139 .070 .020 | .125 .063 .018 |   |
| 10.0 | .167 .080 .022 | .159 .077 .021 | .144 .071 .020 | .130 .064 .018 | .116 .059 .017 |   |

|      |                |                |                |                |                |   |
|------|----------------|----------------|----------------|----------------|----------------|---|
| 顶棚   | 80%            | 70%            | 50%            | 30%            | 10%            | 0 |
| 墙面   | 50% 30% 10%    | 50% 30% 10%    | 50% 30% 10%    | 50% 30% 10%    | 50% 30% 10%    | 0 |
| 地板   | 20%            | 20%            | 20%            | 20%            | 20%            | 0 |
| 室空间比 | 天 花 板 利 用 系 数  |                |                |                |                |   |
| 0.0  | .437 .437 .437 | .373 .373 .373 | .255 .255 .255 | .146 .146 .146 | .047 .047 .047 |   |
| 1.0  | .436 .403 .374 | .373 .346 .322 | .255 .238 .222 | .147 .138 .129 | .047 .044 .042 |   |
| 2.0  | .431 .382 .340 | .369 .328 .294 | .253 .227 .205 | .146 .132 .120 | .047 .043 .039 |   |
| 3.0  | .423 .366 .320 | .363 .316 .277 | .249 .219 .195 | .144 .128 .115 | .046 .042 .038 |   |
| 4.0  | .416 .354 .307 | .357 .306 .267 | .245 .213 .188 | .142 .125 .111 | .046 .041 .037 |   |
| 5.0  | .408 .345 .298 | .351 .298 .259 | .241 .208 .183 | .140 .122 .109 | .045 .040 .036 |   |
| 6.0  | .401 .337 .291 | .344 .292 .254 | .238 .204 .180 | .138 .120 .107 | .044 .039 .035 |   |
| 7.0  | .394 .331 .287 | .339 .287 .250 | .234 .201 .177 | .136 .118 .105 | .044 .039 .035 |   |
| 8.0  | .387 .325 .283 | .333 .282 .247 | .230 .198 .175 | .134 .117 .104 | .043 .038 .035 |   |
| 9.0  | .381 .321 .280 | .328 .278 .245 | .227 .196 .174 | .132 .116 .104 | .043 .038 .034 |   |
| 10.0 | .375 .317 .278 | .323 .275 .243 | .224 .193 .172 | .131 .114 .103 | .042 .038 .034 |   |

C角度范围: 0度 - 360度  
 C角度间隔: 10.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
 环境湿度: 65.0%  
 测试距离: 1.615米 [K=1.0000]  
 备注:

## UGR(Unified Glare Rating)数据表

|                         |                       |      |      |      |      |                     |      |      |      |      |
|-------------------------|-----------------------|------|------|------|------|---------------------|------|------|------|------|
| 灯具名称: Dropa             | 灯具类型:                 |      |      |      |      | 灯具重量:               |      |      |      |      |
| 灯具规格:                   | 外型尺寸:                 |      |      |      |      | 测试编号: A2020121902   |      |      |      |      |
| 制造厂商: EVERFINE          | 发光口面:                 |      |      |      |      | 遮光角:                |      |      |      |      |
| 反射比: 天花板                | 0.7                   | 0.7  | 0.5  | 0.5  | 0.3  | 0.7                 | 0.7  | 0.5  | 0.5  | 0.3  |
| 墙面                      | 0.5                   | 0.3  | 0.5  | 0.3  | 0.3  | 0.5                 | 0.3  | 0.5  | 0.3  | 0.3  |
| 工作面                     | 0.2                   | 0.2  | 0.2  | 0.2  | 0.2  | 0.2                 | 0.2  | 0.2  | 0.2  | 0.2  |
| 房间尺寸                    | 交叉 (Viewed crosswise) |      |      |      |      | 向前 (Viewed endwise) |      |      |      |      |
| x = 2H y = 2H           | 13.6                  | 14.8 | 14.2 | 15.5 | 16.4 | 13.6                | 14.9 | 14.3 | 15.6 | 16.4 |
| 3H                      | 16.4                  | 17.6 | 17.1 | 18.3 | 19.2 | 16.4                | 17.6 | 17.1 | 18.3 | 19.2 |
| 4H                      | 18.0                  | 19.1 | 18.7 | 19.8 | 20.7 | 18.0                | 19.1 | 18.8 | 19.9 | 20.8 |
| 6H                      | 19.7                  | 20.8 | 20.5 | 21.6 | 22.5 | 19.8                | 20.8 | 20.5 | 21.6 | 22.5 |
| 8H                      | 20.7                  | 21.8 | 21.5 | 22.5 | 23.5 | 20.8                | 21.8 | 21.5 | 22.6 | 23.5 |
| 12H                     | 21.9                  | 22.9 | 22.7 | 23.7 | 24.6 | 22.0                | 22.9 | 22.7 | 23.7 | 24.7 |
| 4H 2H                   | 14.5                  | 15.6 | 15.2 | 16.3 | 17.2 | 14.5                | 15.6 | 15.2 | 16.3 | 17.2 |
| 3H                      | 17.5                  | 18.4 | 18.2 | 19.2 | 20.2 | 17.5                | 18.5 | 18.3 | 19.3 | 20.2 |
| 4H                      | 19.2                  | 20.1 | 20.0 | 20.9 | 21.9 | 19.2                | 20.1 | 20.0 | 20.9 | 21.9 |
| 6H                      | 21.1                  | 21.9 | 21.9 | 22.7 | 23.8 | 21.2                | 22.0 | 22.0 | 22.8 | 23.8 |
| 8H                      | 22.2                  | 23.0 | 23.0 | 23.8 | 24.8 | 22.3                | 23.0 | 23.1 | 23.9 | 24.9 |
| 12H                     | 23.5                  | 24.2 | 24.3 | 25.0 | 26.1 | 23.6                | 24.2 | 24.4 | 25.1 | 26.1 |
| 8H 4H                   | 19.8                  | 20.6 | 20.7 | 21.4 | 22.5 | 19.9                | 20.6 | 20.7 | 21.5 | 22.5 |
| 6H                      | 22.1                  | 22.7 | 22.9 | 23.5 | 24.6 | 22.1                | 22.7 | 22.9 | 23.6 | 24.6 |
| 8H                      | 23.3                  | 23.9 | 24.2 | 24.8 | 25.9 | 23.4                | 24.0 | 24.2 | 24.8 | 25.9 |
| 12H                     | 24.9                  | 25.4 | 25.7 | 26.2 | 27.3 | 24.9                | 25.4 | 25.8 | 26.3 | 27.4 |
| 12H 4H                  | 20.0                  | 20.7 | 20.8 | 21.6 | 22.6 | 20.0                | 20.7 | 20.9 | 21.6 | 22.6 |
| 6H                      | 22.3                  | 22.9 | 23.2 | 23.8 | 24.9 | 22.4                | 22.9 | 23.2 | 23.8 | 24.9 |
| 8H                      | 23.8                  | 24.3 | 24.6 | 25.1 | 26.2 | 23.8                | 24.3 | 24.7 | 25.2 | 26.3 |
| 不同间隔布灯时, 观察者位置引起的UGR变化: |                       |      |      |      |      |                     |      |      |      |      |
| S = 1.0H                | + 0.1 / - 0.1         |      |      |      |      | + 0.1 / - 0.1       |      |      |      |      |
| 1.5H                    | + 0.2 / - 0.3         |      |      |      |      | + 0.2 / - 0.3       |      |      |      |      |
| 2.0H                    | + 0.3 / - 0.4         |      |      |      |      | + 0.3 / - 0.4       |      |      |      |      |

依据CIE Pub.117计算, 575.01lm光源光通表格中的数据需要进行修正( $81\log(F/F_0) = -1.9$ )。  
出光口面积: 0.1 m<sup>2</sup>

C角度范围: 0度 - 360度  
C角度间隔: 10.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: DAMIN  
测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
环境湿度: 65.0%  
测试距离: 1.615米 [K=1.0000]  
备注:

## UF利用系数表

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

| 反 射 比 / REFLECTANCE        |                                                     |     |     |     |     |     |                     |     |     |         |
|----------------------------|-----------------------------------------------------|-----|-----|-----|-----|-----|---------------------|-----|-----|---------|
| 天花板                        | 0.8                                                 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5                 | 0.5 | 0.5 | 0       |
| 墙壁                         | 0.7                                                 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7                 | 0.5 | 0.3 | 0       |
| 工作面                        | 0.2                                                 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2                 | 0.2 | 0.2 | 0       |
| 室形指数                       | 利用系数 UTILIZATION FACTORS (%) $k(RI) \times RCR = 5$ |     |     |     |     |     |                     |     |     |         |
| $k = 0.60$                 | 40                                                  | 27  | 20  | 39  | 27  | 19  | 36                  | 25  | 19  | 12      |
| 0.80                       | 49                                                  | 35  | 26  | 47  | 34  | 26  | 43                  | 32  | 25  | 16      |
| 1.00                       | 56                                                  | 42  | 33  | 54  | 41  | 32  | 49                  | 40  | 31  | 21      |
| 1.25                       | 63                                                  | 49  | 40  | 60  | 47  | 39  | 55                  | 44  | 36  | 25      |
| 1.50                       | 69                                                  | 55  | 45  | 65  | 53  | 44  | 59                  | 48  | 41  | 28      |
| 2.00                       | 76                                                  | 64  | 54  | 72  | 61  | 52  | 65                  | 55  | 48  | 34      |
| 2.50                       | 81                                                  | 69  | 60  | 77  | 66  | 58  | 69                  | 60  | 53  | 37      |
| 3.00                       | 85                                                  | 74  | 66  | 81  | 71  | 63  | 72                  | 64  | 58  | 40      |
| 4.00                       | 91                                                  | 81  | 73  | 85  | 77  | 70  | 76                  | 69  | 64  | 45      |
| 5.00                       | 94                                                  | 86  | 79  | 88  | 81  | 75  | 79                  | 73  | 68  | 48      |
| ROOM INDEX                 | UF (总)                                              |     |     |     |     |     |                     |     |     | UF (直接) |
| 依据标准文件 DIN EN 13032-2 2004 |                                                     |     | 悬挂灯 |     |     |     | 安装距高比 SHRNOM = 1.25 |     |     |         |


C角度范围: 0度 - 360度  
 C角度间隔: 10.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
 环境湿度: 65.0%  
 测试距离: 1.615米 [K=1.0000]  
 备注:



## 灯具等光强曲线

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

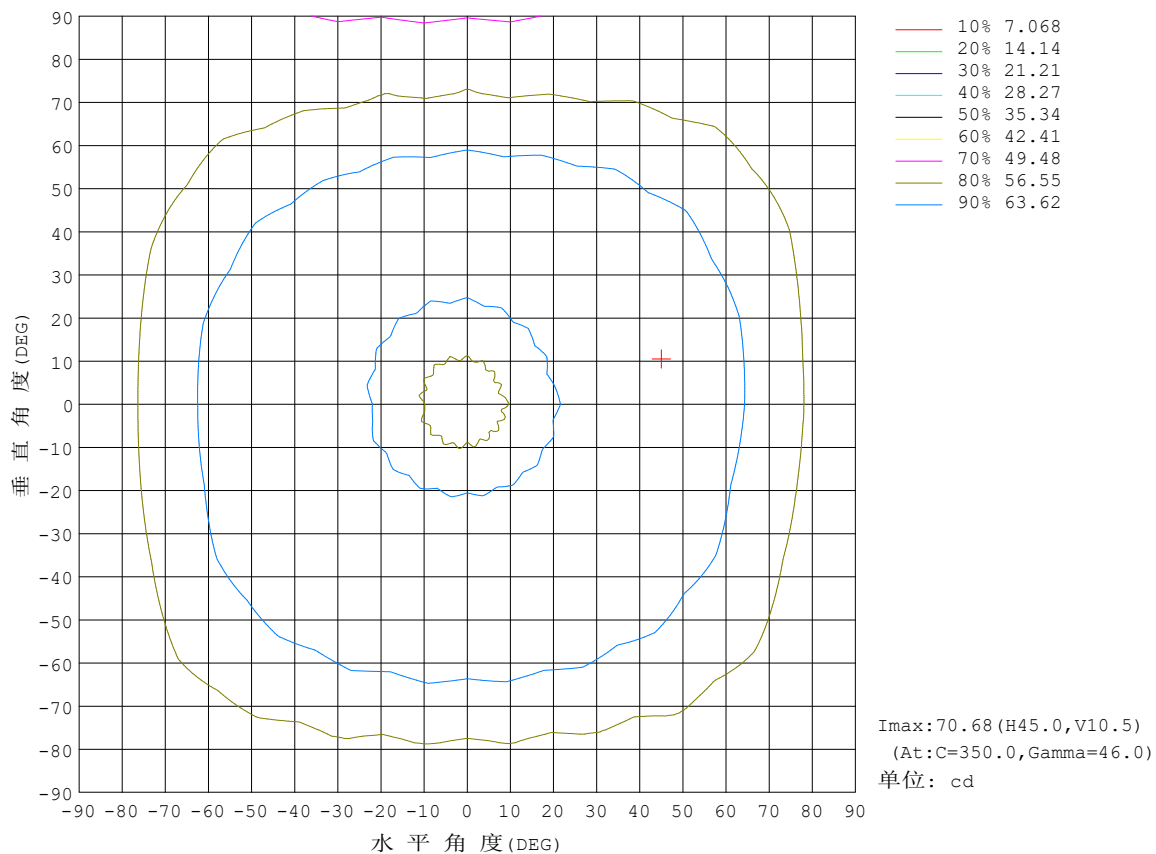


C角度范围: 0度 - 360度  
C角度间隔: 10.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: DAMIN  
测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
环境湿度: 65.0%  
测试距离: 1.615米 [K=1.0000]  
备注:

## 灯 具 有 效 平 均 照 度 图

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

光通输出: 121.2 lm

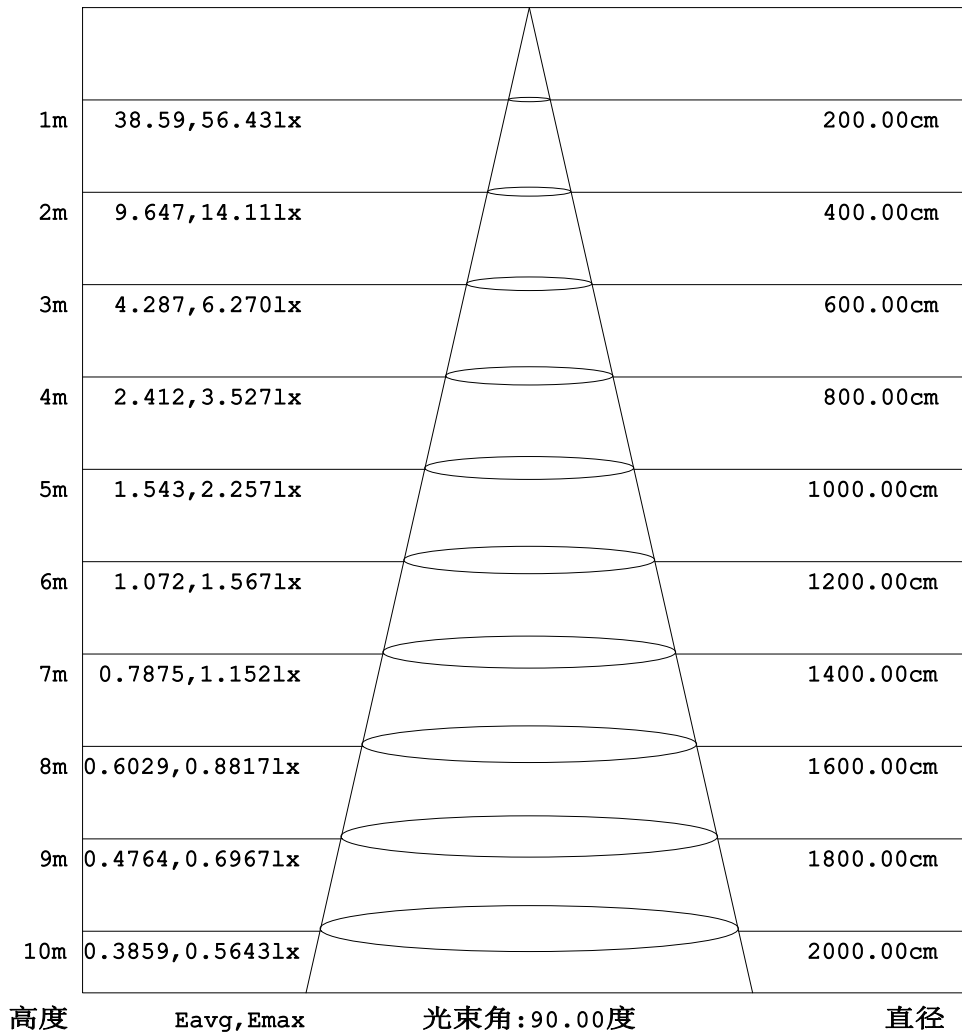


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度  
 C角度间隔: 10.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
 环境湿度: 65.0%  
 测试距离: 1.615米 [K=1.0000]  
 备注:

## 平面等照度曲线

|                       |       |                          |
|-----------------------|-------|--------------------------|
| 灯具名称: <b>Dropa</b>    | 灯具类型: | 灯具重量:                    |
| 灯具规格:                 | 外型尺寸: | 测试编号: <b>A2020121902</b> |
| 制造厂商: <b>EVERFINE</b> | 发光口面: | 遮光角:                     |

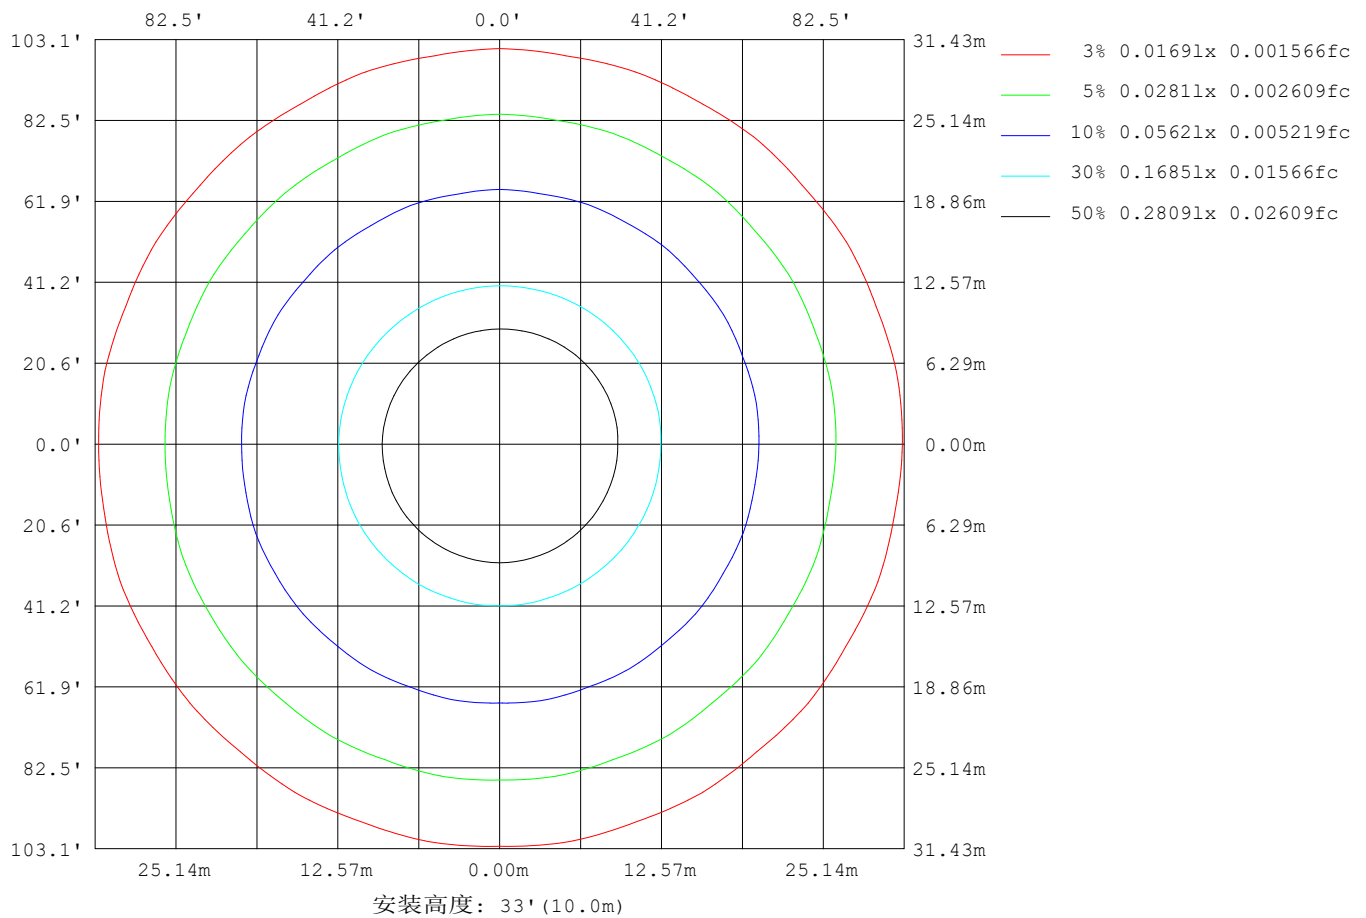

C角度范围: 0度 - 360度  
 C角度间隔: 10.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
 环境湿度: 65.0%  
 测试距离: 1.615米 [K=1.0000]  
 备注:

## LED筒灯平均亮度报告

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |


| 平均亮度      | 数值(cd/m2) |
|-----------|-----------|
| L横(65)av  | 1485      |
| L横(75)av  | 2231      |
| L横(85)av  | 6159      |
| L纵(65)av  | 1455      |
| L纵(75)av  | 2176      |
| L纵(85)av  | 6016      |
| L45(65)av | 1466      |
| L45(75)av | 2195      |
| L45(85)av | 6064      |

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度  
C角度间隔: 10.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: DAMIN  
测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-R3000(2M2D)系统 V2.00.416  
环境湿度: 65.0%  
测试距离: 1.615米 [K=1.0000]  
备注:

## 平面照度曲线

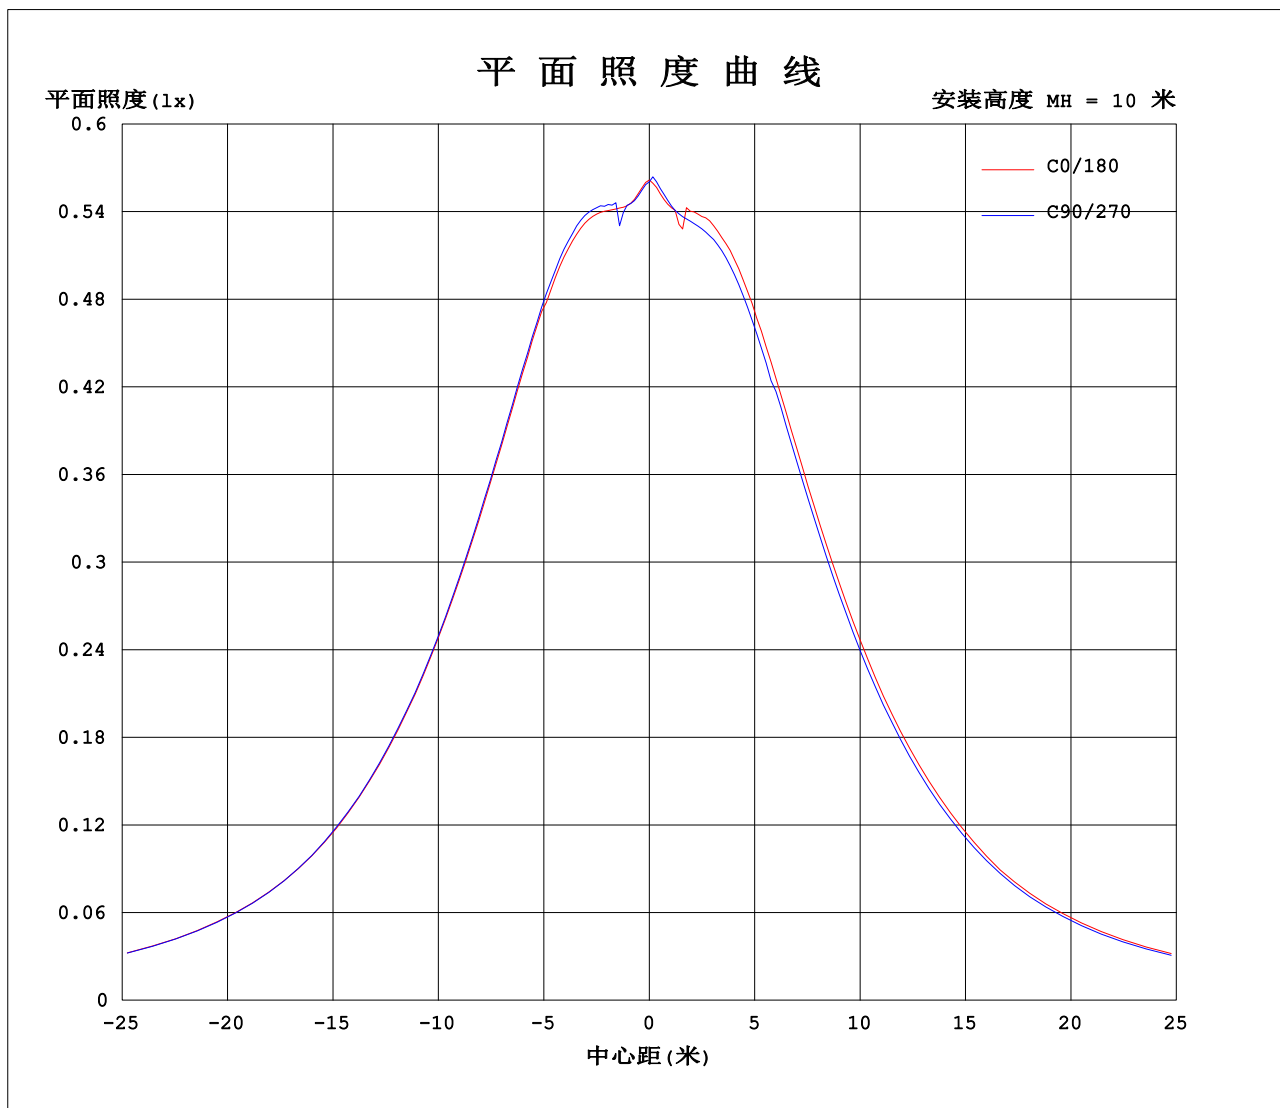

C角度范围: 0度 - 360度  
C角度间隔: 10.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: DAMIN  
测试日期: 2020-12-19

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416  
环境湿度: 65.0%  
测试距离: 1.615米 [K=1.0000]  
备注:

## 光强分布数据表格

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropa    | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

表--1

单位: cd

| C (DEG)<br>γ (DEG) | 0    | 10   | 20   | 30   | 40   | 50   | 60   | 70   | 80   | 90   | 100  | 110  | 120  | 130  | 140  | 150  | 160  | 170  | 180  |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 0                  | 56.2 | 56.1 | 56.3 | 56.0 | 56.3 | 56.0 | 56.4 | 56.1 | 56.4 | 56.0 | 56.3 | 56.0 | 56.2 | 56.0 | 56.1 | 56.1 | 56.1 | 56.1 | 56.2 |
| 5                  | 55.2 | 55.3 | 55.3 | 55.3 | 55.2 | 55.3 | 55.2 | 55.3 | 55.2 | 55.2 | 55.1 | 55.1 | 55.1 | 55.1 | 55.2 | 55.1 | 55.1 | 55.0 | 55.1 |
| 10                 | 56.7 | 57.4 | 56.8 | 57.5 | 56.7 | 57.3 | 56.7 | 57.2 | 56.5 | 57.0 | 56.3 | 56.8 | 56.1 | 56.9 | 56.1 | 56.7 | 55.9 | 56.6 | 56.8 |
| 15                 | 59.6 | 60.4 | 59.7 | 60.5 | 59.6 | 60.3 | 59.5 | 60.2 | 59.3 | 60.1 | 59.1 | 59.9 | 59.0 | 59.7 | 58.8 | 59.5 | 58.5 | 59.2 | 59.5 |
| 20                 | 62.7 | 63.5 | 62.8 | 63.4 | 62.8 | 63.5 | 62.7 | 63.4 | 62.6 | 63.3 | 62.5 | 63.2 | 62.2 | 62.8 | 62.0 | 62.6 | 61.7 | 62.3 | 62.4 |
| 25                 | 65.3 | 66.1 | 65.6 | 66.1 | 65.7 | 66.2 | 65.7 | 66.2 | 65.7 | 66.1 | 65.3 | 65.9 | 65.2 | 65.7 | 64.8 | 65.4 | 64.6 | 65.0 | 65.2 |
| 30                 | 67.8 | 68.0 | 67.9 | 68.1 | 68.0 | 68.1 | 68.1 | 68.2 | 68.2 | 68.2 | 68.0 | 68.0 | 67.8 | 67.8 | 67.6 | 67.5 | 67.2 | 67.1 | 67.3 |
| 35                 | 69.1 | 69.4 | 69.2 | 69.4 | 69.3 | 69.4 | 69.4 | 69.5 | 69.5 | 69.5 | 69.4 | 69.3 | 69.2 | 69.2 | 69.0 | 69.0 | 68.7 | 68.6 | 68.7 |
| 40                 | 70.0 | 70.1 | 70.0 | 70.0 | 70.1 | 70.1 | 70.1 | 70.2 | 70.3 | 70.4 | 70.2 | 70.2 | 70.1 | 70.0 | 69.8 | 69.9 | 69.6 | 69.3 | 69.5 |
| 45                 | 70.2 | 70.2 | 70.2 | 70.0 | 70.1 | 70.1 | 70.2 | 70.3 | 70.5 | 70.6 | 70.6 | 70.4 | 70.3 | 70.2 | 70.1 | 70.1 | 70.0 | 69.6 | 69.8 |
| 50                 | 69.7 | 69.6 | 69.6 | 69.5 | 69.7 | 69.5 | 69.8 | 69.8 | 70.1 | 70.1 | 70.1 | 70.0 | 70.0 | 69.8 | 69.8 | 69.8 | 69.6 | 69.2 | 69.4 |
| 55                 | 68.0 | 67.9 | 68.0 | 67.8 | 68.0 | 67.7 | 68.1 | 68.1 | 68.4 | 68.4 | 68.6 | 68.4 | 68.6 | 68.5 | 68.6 | 68.5 | 68.5 | 68.1 | 68.1 |
| 60                 | 65.5 | 64.9 | 65.4 | 64.7 | 65.5 | 64.8 | 65.6 | 65.0 | 65.9 | 65.5 | 65.9 | 65.4 | 66.0 | 65.2 | 66.0 | 65.3 | 65.8 | 64.9 | 64.9 |
| 65                 | 63.3 | 62.6 | 63.1 | 62.5 | 63.2 | 62.5 | 63.3 | 62.7 | 63.5 | 63.0 | 63.7 | 62.9 | 63.6 | 62.9 | 63.5 | 63.0 | 63.4 | 62.4 | 62.3 |
| 70                 | 61.0 | 60.3 | 60.9 | 60.2 | 61.0 | 60.2 | 61.1 | 60.5 | 61.3 | 60.7 | 61.4 | 60.7 | 61.5 | 60.7 | 61.3 | 60.8 | 61.2 | 60.2 | 60.2 |
| 75                 | 58.2 | 57.3 | 58.0 | 57.3 | 58.1 | 57.3 | 58.2 | 57.6 | 58.4 | 57.8 | 58.5 | 57.8 | 58.6 | 57.8 | 58.5 | 58.0 | 58.3 | 57.4 | 57.3 |
| 80                 | 55.2 | 55.1 | 55.4 | 55.1 | 55.2 | 55.1 | 55.1 | 55.4 | 55.3 | 55.6 | 54.8 | 55.5 | 54.4 | 55.5 | 55.9 | 55.6 | 55.7 | 54.9 | 54.9 |
| 85                 | 53.9 | 53.5 | 53.8 | 53.5 | 54.1 | 53.6 | 54.1 | 53.9 | 54.3 | 54.1 | 54.4 | 54.1 | 54.4 | 54.0 | 54.2 | 54.1 | 54.1 | 53.5 | 53.5 |
| 90                 | 51.8 | 51.0 | 51.8 | 51.2 | 52.1 | 51.6 | 52.4 | 52.0 | 52.6 | 52.3 | 52.7 | 52.3 | 52.8 | 52.3 | 52.7 | 52.4 | 52.6 | 51.9 | 51.8 |
| 95                 | 47.5 | 46.5 | 47.8 | 47.4 | 48.8 | 48.6 | 49.9 | 49.6 | 50.4 | 50.1 | 50.6 | 50.1 | 50.7 | 50.2 | 50.6 | 50.3 | 50.6 | 49.9 | 49.9 |
| 100                | 42.9 | 42.1 | 43.6 | 43.5 | 45.3 | 45.4 | 47.0 | 46.9 | 47.9 | 47.6 | 48.3 | 47.8 | 48.5 | 47.9 | 48.4 | 48.0 | 48.4 | 47.6 | 47.7 |
| 105                | 38.5 | 37.7 | 39.5 | 39.6 | 41.7 | 42.1 | 44.0 | 44.0 | 45.2 | 44.9 | 45.7 | 45.1 | 45.9 | 45.2 | 45.8 | 45.4 | 45.8 | 45.1 | 45.1 |
| 110                | 34.0 | 33.2 | 35.1 | 35.4 | 37.7 | 38.3 | 40.5 | 40.5 | 41.9 | 41.6 | 42.6 | 41.9 | 42.8 | 42.1 | 42.8 | 42.3 | 42.9 | 42.0 | 42.0 |
| 115                | 29.5 | 28.6 | 30.6 | 31.1 | 33.6 | 34.3 | 36.7 | 36.8 | 38.3 | 37.9 | 39.0 | 38.3 | 39.3 | 38.5 | 39.3 | 38.7 | 39.4 | 38.5 | 38.5 |
| 120                | 25.0 | 24.0 | 25.8 | 26.8 | 29.4 | 30.3 | 32.7 | 32.9 | 34.5 | 34.1 | 35.2 | 34.5 | 35.6 | 34.7 | 35.6 | 35.0 | 35.8 | 34.8 | 34.8 |
| 125                | 20.6 | 19.6 | 21.2 | 21.5 | 25.3 | 26.2 | 28.7 | 28.9 | 30.5 | 30.1 | 31.3 | 30.6 | 31.6 | 30.8 | 31.7 | 31.1 | 31.9 | 31.0 | 31.0 |
| 130                | 16.4 | 15.3 | 17.0 | 17.3 | 20.9 | 22.3 | 24.7 | 24.8 | 26.6 | 26.2 | 27.3 | 26.6 | 27.7 | 26.8 | 27.8 | 27.1 | 28.0 | 27.1 | 27.1 |
| 135                | 12.5 | 11.5 | 13.2 | 13.6 | 15.9 | 17.8 | 20.7 | 20.9 | 22.5 | 22.1 | 23.2 | 22.5 | 23.6 | 22.8 | 23.8 | 23.0 | 24.0 | 23.1 | 23.1 |
| 140                | 9.21 | 8.24 | 9.75 | 10.3 | 12.1 | 13.6 | 16.6 | 16.8 | 18.4 | 18.0 | 19.2 | 18.4 | 19.5 | 18.7 | 19.7 | 19.0 | 19.9 | 19.1 | 19.0 |
| 145                | 6.29 | 5.45 | 6.82 | 7.34 | 8.84 | 10.1 | 12.7 | 12.9 | 14.4 | 13.9 | 15.1 | 14.3 | 15.4 | 14.6 | 15.7 | 14.9 | 15.9 | 15.0 | 15.0 |
| 150                | 3.84 | 3.16 | 4.24 | 4.66 | 5.94 | 6.83 | 8.98 | 9.11 | 10.5 | 9.96 | 11.1 | 10.3 | 11.4 | 10.6 | 11.7 | 10.9 | 11.9 | 11.1 | 11.0 |
| 155                | 1.91 | 1.42 | 2.13 | 2.37 | 3.43 | 4.00 | 5.66 | 5.63 | 6.74 | 6.20 | 7.26 | 6.60 | 7.55 | 6.85 | 7.87 | 7.10 | 8.00 | 7.31 | 7.23 |
| 160                | 0.66 | 0.52 | 0.83 | 0.93 | 1.58 | 1.82 | 2.91 | 2.73 | 3.54 | 3.07 | 3.84 | 3.34 | 4.07 | 3.57 | 4.33 | 3.75 | 4.52 | 3.92 | 3.82 |
| 165                | 0.23 | 0.22 | 0.27 | 0.29 | 0.47 | 0.52 | 0.93 | 0.83 | 1.19 | 0.97 | 1.34 | 1.08 | 1.50 | 1.18 | 1.60 | 1.27 | 1.73 | 1.37 | 1.28 |
| 170                | 0.19 | 0.19 | 0.19 | 0.21 | 0.24 | 0.27 | 0.34 | 0.34 | 0.40 | 0.33 | 0.41 | 0.34 | 0.44 | 0.38 | 0.44 | 0.39 | 0.43 | 0.36 | 0.29 |
| 175                | 0.17 | 0.17 | 0.17 | 0.17 | 0.19 | 0.18 | 0.19 | 0.18 | 0.18 | 0.17 | 0.20 | 0.18 | 0.20 | 0.19 | 0.19 | 0.17 | 0.20 | 0.18 | 0.13 |
| 180                | 0.14 | 0.14 | 0.14 | 0.14 | 0.14 | 0.14 | 0.15 | 0.14 | 0.14 | 0.15 | 0.15 | 0.14 | 0.13 | 0.13 | 0.14 | 0.15 | 0.14 | 0.14 | 0.15 |

C角度范围: 0度 - 360度

C角度间隔: 10.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: DAMIN

测试日期: 2020-12-19

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416

环境湿度: 65.0%

测试距离: 1.615米 [K=1.0000]

备注:

## 光强分布数据表格

|                |       |                   |
|----------------|-------|-------------------|
| 灯具名称: Dropla   | 灯具类型: | 灯具重量:             |
| 灯具规格:          | 外型尺寸: | 测试编号: A2020121902 |
| 制造厂商: EVERFINE | 发光口面: | 遮光角:              |

表--2

单位: cd

| C (DEG)<br>γ (DEG) | 190  | 200  | 210  | 220  | 230  | 240  | 250  | 260  | 270  | 280  | 290  | 300  | 310  | 320  | 330  | 340  | 350  |  |  |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--|--|
| 0                  | 56.1 | 56.3 | 56.0 | 56.3 | 56.0 | 56.4 | 56.1 | 56.4 | 56.0 | 56.3 | 56.0 | 56.2 | 56.0 | 56.2 | 56.1 | 56.1 | 56.1 |  |  |
| 5                  | 55.2 | 55.1 | 55.2 | 55.1 | 55.3 | 55.2 | 55.3 | 55.2 | 55.4 | 55.3 | 55.4 | 55.4 | 55.4 | 55.5 | 55.5 | 55.5 | 55.5 |  |  |
| 10                 | 55.9 | 56.7 | 55.8 | 56.4 | 55.8 | 56.3 | 55.9 | 56.5 | 56.0 | 56.8 | 56.2 | 56.9 | 56.5 | 57.4 | 56.9 | 57.6 | 57.0 |  |  |
| 15                 | 58.5 | 59.1 | 58.3 | 59.0 | 58.1 | 58.9 | 58.1 | 59.0 | 58.4 | 59.3 | 58.8 | 59.8 | 59.2 | 60.2 | 59.7 | 60.6 | 60.0 |  |  |
| 20                 | 61.6 | 62.1 | 61.2 | 61.7 | 61.0 | 61.7 | 61.0 | 61.8 | 61.3 | 62.1 | 61.7 | 62.6 | 62.3 | 63.4 | 62.8 | 63.8 | 63.1 |  |  |
| 25                 | 64.3 | 64.7 | 63.9 | 64.3 | 63.5 | 64.0 | 63.5 | 64.3 | 63.7 | 64.5 | 64.2 | 65.1 | 64.9 | 65.9 | 65.6 | 66.4 | 65.7 |  |  |
| 30                 | 66.7 | 66.7 | 66.4 | 66.1 | 65.5 | 65.8 | 65.3 | 65.9 | 65.3 | 66.3 | 66.5 | 66.9 | 67.2 | 67.7 | 67.9 | 68.3 | 68.3 |  |  |
| 35                 | 68.2 | 68.0 | 67.6 | 67.3 | 67.0 | 67.0 | 66.9 | 67.0 | 67.1 | 67.4 | 67.7 | 68.2 | 68.5 | 69.0 | 69.2 | 69.6 | 69.7 |  |  |
| 40                 | 69.0 | 68.7 | 68.3 | 68.0 | 67.6 | 67.5 | 67.5 | 67.5 | 67.7 | 67.9 | 68.3 | 68.8 | 69.2 | 69.6 | 70.0 | 70.3 | 70.4 |  |  |
| 45                 | 69.3 | 68.9 | 68.6 | 68.1 | 67.8 | 67.6 | 67.6 | 67.7 | 67.7 | 68.0 | 68.3 | 68.8 | 69.3 | 69.6 | 70.0 | 70.4 | 70.6 |  |  |
| 50                 | 68.9 | 68.5 | 68.1 | 67.5 | 67.2 | 67.1 | 67.1 | 67.1 | 67.3 | 67.3 | 67.8 | 68.2 | 68.8 | 69.1 | 69.6 | 69.9 | 70.2 |  |  |
| 55                 | 67.8 | 67.3 | 66.8 | 65.6 | 65.9 | 65.1 | 65.8 | 65.1 | 65.8 | 65.2 | 66.2 | 65.7 | 67.2 | 67.4 | 68.0 | 68.0 | 68.4 |  |  |
| 60                 | 65.1 | 63.9 | 64.1 | 62.8 | 63.0 | 62.2 | 62.9 | 62.1 | 62.9 | 62.2 | 63.3 | 63.0 | 64.3 | 64.0 | 65.3 | 64.9 | 65.9 |  |  |
| 65                 | 62.5 | 61.3 | 61.5 | 60.2 | 60.3 | 59.4 | 60.2 | 59.4 | 60.1 | 59.4 | 60.5 | 60.3 | 61.8 | 61.5 | 62.8 | 62.5 | 63.5 |  |  |
| 70                 | 60.3 | 59.1 | 59.2 | 58.0 | 58.0 | 57.3 | 57.9 | 57.2 | 57.8 | 57.3 | 58.2 | 58.1 | 59.3 | 59.1 | 60.4 | 60.2 | 61.2 |  |  |
| 75                 | 57.5 | 56.2 | 56.4 | 55.1 | 55.2 | 54.4 | 54.9 | 54.2 | 54.8 | 54.3 | 55.3 | 55.1 | 56.4 | 56.1 | 57.4 | 57.3 | 58.3 |  |  |
| 80                 | 54.7 | 53.7 | 53.6 | 52.6 | 52.5 | 51.9 | 52.3 | 51.8 | 52.2 | 51.9 | 52.6 | 52.7 | 53.7 | 53.8 | 54.8 | 55.0 | 55.8 |  |  |
| 85                 | 53.2 | 52.4 | 52.1 | 51.3 | 51.1 | 50.6 | 50.8 | 50.5 | 50.8 | 50.6 | 51.2 | 51.4 | 52.2 | 52.3 | 53.3 | 53.4 | 54.2 |  |  |
| 90                 | 51.8 | 50.8 | 50.7 | 49.8 | 49.7 | 49.1 | 49.4 | 49.0 | 49.4 | 49.0 | 49.7 | 49.7 | 50.5 | 50.3 | 51.4 | 51.1 | 52.1 |  |  |
| 95                 | 49.9 | 48.9 | 48.9 | 48.0 | 47.9 | 47.3 | 47.6 | 47.1 | 47.5 | 47.0 | 47.6 | 47.2 | 47.8 | 46.9 | 47.8 | 46.8 | 47.8 |  |  |
| 100                | 47.8 | 46.8 | 46.9 | 46.0 | 45.9 | 45.2 | 45.6 | 45.0 | 45.4 | 44.7 | 45.2 | 44.5 | 44.7 | 43.4 | 43.9 | 42.6 | 43.3 |  |  |
| 105                | 45.3 | 44.3 | 44.5 | 43.6 | 43.6 | 42.9 | 43.4 | 42.6 | 43.0 | 42.1 | 42.5 | 41.5 | 41.5 | 39.8 | 40.0 | 38.4 | 38.8 |  |  |
| 110                | 42.5 | 41.4 | 41.8 | 40.7 | 40.9 | 40.1 | 40.6 | 39.7 | 40.1 | 39.1 | 39.4 | 38.1 | 37.9 | 35.9 | 35.9 | 34.0 | 34.3 |  |  |
| 115                | 39.1 | 38.0 | 38.5 | 37.4 | 37.7 | 36.8 | 37.4 | 36.4 | 36.8 | 35.7 | 35.9 | 34.4 | 34.1 | 31.8 | 31.6 | 29.5 | 29.8 |  |  |
| 120                | 35.5 | 34.4 | 34.9 | 33.8 | 34.2 | 33.3 | 33.9 | 32.8 | 33.3 | 32.1 | 32.3 | 30.7 | 30.2 | 27.7 | 27.4 | 25.2 | 25.2 |  |  |
| 125                | 31.7 | 30.6 | 31.2 | 30.2 | 30.6 | 29.6 | 30.3 | 29.2 | 29.7 | 28.4 | 28.6 | 26.9 | 26.3 | 23.8 | 23.3 | 21.1 | 20.9 |  |  |
| 130                | 27.8 | 26.8 | 27.5 | 26.4 | 26.9 | 25.9 | 26.6 | 25.5 | 26.0 | 24.7 | 24.8 | 23.1 | 22.5 | 19.9 | 19.4 | 17.1 | 16.7 |  |  |
| 135                | 23.9 | 22.9 | 23.6 | 22.6 | 23.1 | 22.1 | 22.8 | 21.7 | 22.2 | 20.9 | 21.1 | 19.3 | 18.7 | 16.2 | 15.6 | 13.4 | 12.9 |  |  |
| 140                | 19.9 | 18.9 | 19.6 | 18.7 | 19.2 | 18.2 | 19.0 | 17.9 | 18.4 | 17.1 | 17.3 | 15.6 | 15.1 | 12.6 | 12.0 | 9.91 | 9.50 |  |  |
| 145                | 15.9 | 14.9 | 15.7 | 14.8 | 15.4 | 14.4 | 15.1 | 14.1 | 14.6 | 13.4 | 13.6 | 11.9 | 11.6 | 9.31 | 8.69 | 6.82 | 6.52 |  |  |
| 150                | 11.9 | 11.0 | 11.8 | 10.9 | 11.6 | 10.6 | 11.3 | 10.3 | 10.9 | 9.77 | 9.68 | 7.10 | 8.23 | 6.30 | 5.75 | 4.16 | 4.01 |  |  |
| 155                | 8.07 | 7.26 | 8.04 | 7.21 | 7.92 | 6.98 | 7.67 | 6.76 | 7.33 | 6.33 | 6.10 | 3.86 | 5.08 | 3.66 | 3.24 | 2.07 | 2.04 |  |  |
| 160                | 4.51 | 3.86 | 4.52 | 3.81 | 4.47 | 3.72 | 4.31 | 3.56 | 4.06 | 3.28 | 3.49 | 2.15 | 2.35 | 1.54 | 1.35 | 0.70 | 0.74 |  |  |
| 165                | 1.66 | 0.94 | 1.56 | 1.12 | 1.55 | 0.93 | 1.45 | 1.13 | 1.46 | 1.01 | 1.23 | 0.75 | 0.72 | 0.36 | 0.32 | 0.20 | 0.19 |  |  |
| 170                | 0.29 | 0.28 | 0.34 | 0.30 | 0.28 | 0.27 | 0.33 | 0.33 | 0.36 | 0.30 | 0.32 | 0.26 | 0.25 | 0.18 | 0.15 | 0.14 | 0.14 |  |  |
| 175                | 0.13 | 0.13 | 0.15 | 0.15 | 0.17 | 0.14 | 0.15 | 0.14 | 0.15 | 0.13 | 0.14 | 0.12 | 0.13 | 0.12 | 0.11 | 0.11 | 0.12 |  |  |
| 180                | 0.14 | 0.14 | 0.13 | 0.14 | 0.14 | 0.13 | 0.13 | 0.13 | 0.14 | 0.14 | 0.14 | 0.13 | 0.13 | 0.14 | 0.14 | 0.13 | 0.14 |  |  |

C角度范围: 0度 - 360度

C角度间隔: 10.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: DAMIN

测试日期: 2020-12-19

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-R3000 (2M2D) 系统 V2.00.416

环境湿度: 65.0%

测试距离: 1.615米 [K=1.0000]

备注: