


Light Source Test Report

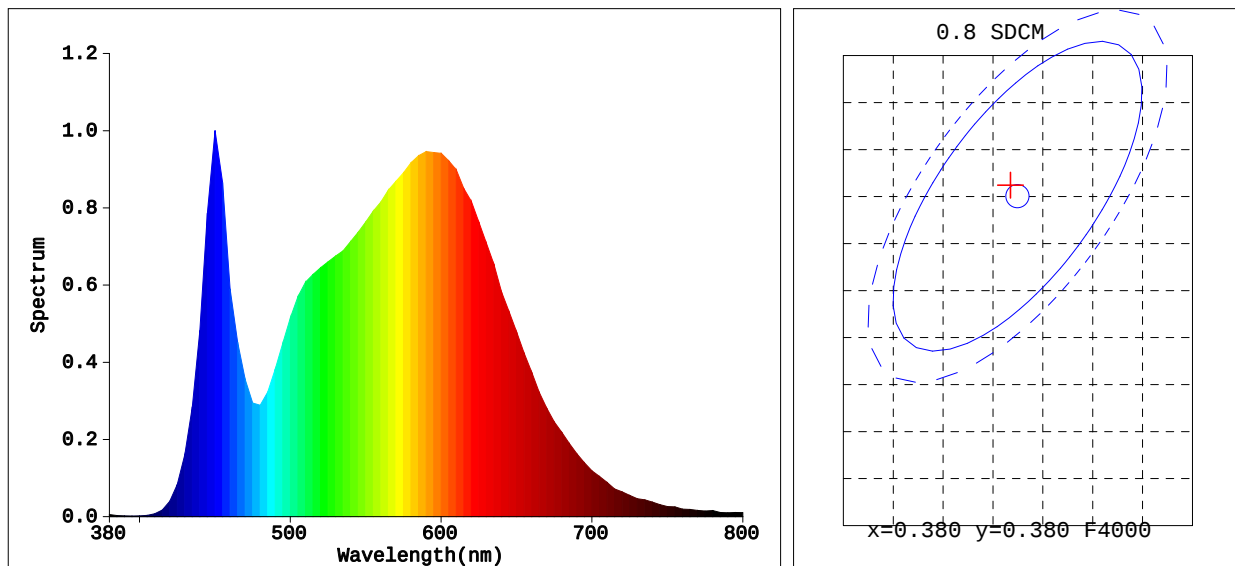

Color Parameters:

Chromaticity Coordinate: $x=0.3794$ $y=0.3809$ Chromaticity Coordinate: $u'=0.2228$ $v'=0.5033$ ($duv=2.25e-03$)

Tc=4058K Dominant WL:Ld=577.6nm Purity=28.2% Centroid WL:568.0nm

Ratio: R=19.5% G=77.1% B=3.4% Peak WL:Lp=450.0nm HWL:23.0nm

Render Index: Ra=83.4

R1 =81	R2 =89	R3 =96	R4 =83	R5 =82	R6 =86	R7 =86	
R8 =64	R9 =7	R10=76	R11=82	R12=64	R13=83	R14=98	R15=74

Photo Parameters:

Flux: 834.15 lm Fe: 2.5247 W Efficacy:85.39 lm/W

Electrical Parameters:

Luminaire: U=231.0V I=0.05421A P=9.769W PF=0.7802

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]
REF=11898(R=3) %=-0.025%Ip=22216(G=5,D=47)
PMT: 12.9 centigrade [14.2]

Product Type:140长方形LED双向壁灯4000K	Manufacturer:
Number:0000002	Test Department:UTEC
Temperature:25.3 deg	Humidity:65.0%
Test Operator:YZB	Test Date:2021-01-09 15:48:55
Software:V2.00.122	Instrument:PMS-80_V1 (SN:YG107113N11110033)