

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

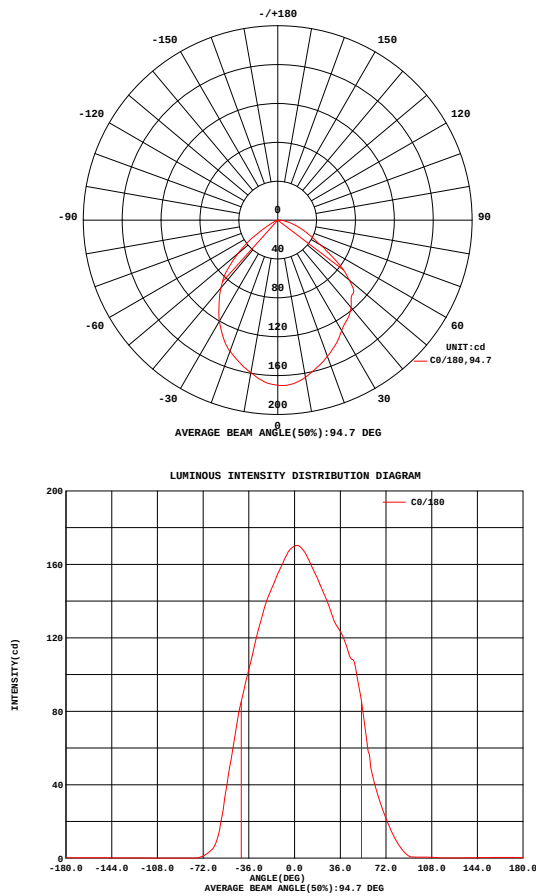


Fig. C0/C180

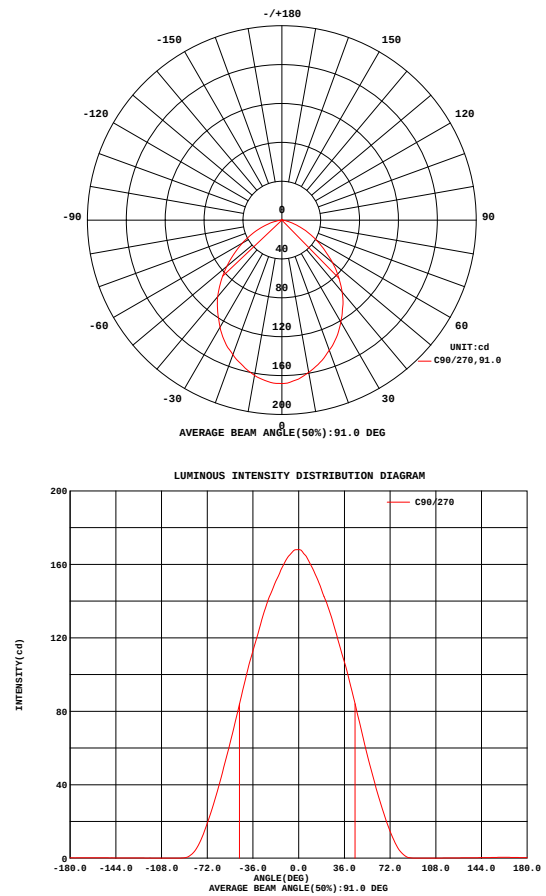


Fig. C90/C270

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-11-11


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.606m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 92.34 lm/W
MODEL	6500K	I _{max} (cd)	170.3	S/MH(C0/180)	1.08	
NOMINAL POWER(W)	3.82	LOR(%)	100.0	S/MH(C90/270)	1.14	
RATED VOLTAGE(V)	3.47	TOTAL FLUX(lm)	352.73	η UP, DN(C0-180)	0.2, 49.5	
NOMINAL FLUX(lm)	352.732	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 50.1	
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	3.47	η down(%)	99.7	CIBSE SHR MAX	1.25	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

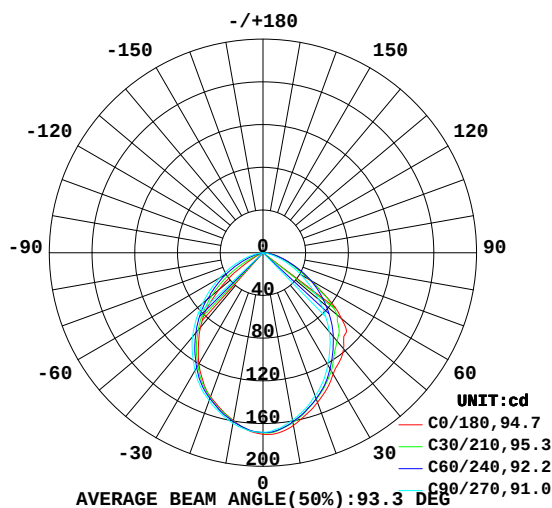

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

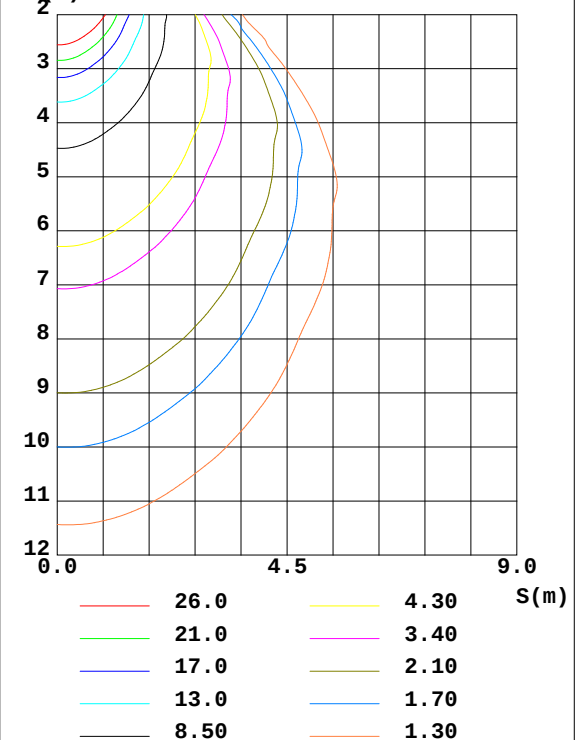

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	164.1	161.1	159.1	158.3	159.5	160.3	162.2	162.5	0- 10	15.69	15.69	4.45,4.45
20	149.2	145.7	142.5	142.0	143.6	144.8	147.3	147.9	10- 20	43.19	58.88	16.7,16.7
30	131.5	126.6	121.3	120.0	120.3	123.1	127.4	130.3	20- 30	62.49	121.4	34.4,34.4
40	117.4	103.8	96.40	93.10	90.98	96.07	102.7	107.6	30- 40	70.64	192.0	54.4,54.4
50	95.99	83.43	68.05	63.00	53.59	65.46	74.05	87.54	40- 50	68.08	260.1	73.7,73.7
60	49.32	54.60	40.72	32.15	12.70	34.22	46.70	56.27	50- 60	51.29	311.4	88.3,88.3
70	25.31	26.01	18.36	6.358	1.957	7.756	22.88	27.76	60- 70	27.26	338.6	96,96
80	9.721	9.180	3.789	0.1659	0.0499	0.2979	5.769	10.09	70- 80	10.78	349.4	99.1,99.1
90	1.189	0.7266	0.0871	0.0456	0.0460	0.0469	0.1961	0.7975	80- 90	2.172	351.6	99.7,99.7
100	0.5721	0.3293	0.0598	0.0617	0.0580	0.0589	0.0592	0.3544	90-100	0.2529	351.8	99.7,99.7
110	0.4301	0.0787	0.0784	0.0841	0.0716	0.0718	0.0648	0.0719	100-110	0.1636	352.0	99.8,99.8
120	0.1069	0.1138	0.1193	0.1323	0.1043	0.0933	0.0791	0.0843	110-120	0.0986	352.1	99.8,99.8
130	0.1588	0.1776	0.1783	0.1801	0.1232	0.1221	0.1102	0.1039	120-130	0.1087	352.2	99.9,99.9
140	0.2266	0.2517	0.2456	0.2483	0.1625	0.1552	0.1403	0.1421	130-140	0.1284	352.3	99.9,99.9
150	0.3087	0.3533	0.3245	0.3324	0.2175	0.1940	0.1796	0.1795	140-150	0.1411	352.5	99.9,99.9
160	0.3719	0.3732	0.4530	0.4012	0.2301	0.2413	0.2323	0.2068	150-160	0.1313	352.6	100,100
170	0.3870	0.3799	0.3697	0.3947	0.2140	0.2241	0.2546	0.2120	160-170	0.0904	352.7	100,100
180	0.2681	0.2590	0.2557	0.2608	0.2657	0.2479	0.2522	0.2480	170-180	0.0263	352.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.606m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:

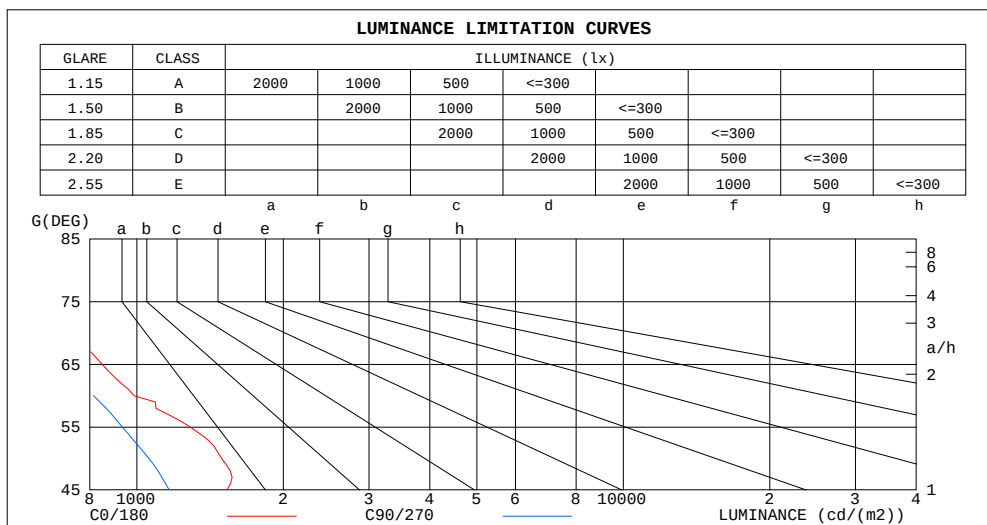

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	509	87
80	560	218
75	644	379
70	740	537
65	849	685
60	986	814
55	1288	933
50	1493	1059
45	1532	1165

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks:

```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.606m [K=1.0000]
Remarks:

```

WEC AND CCEC

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0	
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.260	.148	.047	.253	.145	.046	.240	.138	.044	.228	.132	.042	.217	.126	.041		
2.0	.252	.138	.042	.246	.135	.042	.234	.130	.040	.224	.125	.039	.214	.121	.038		
3.0	.238	.127	.038	.233	.125	.038	.223	.121	.037	.213	.117	.036	.204	.113	.035		
4.0	.223	.116	.034	.219	.114	.034	.210	.111	.033	.201	.108	.033	.194	.105	.032		
5.0	.209	.107	.031	.205	.105	.031	.197	.103	.030	.190	.100	.030	.183	.098	.029		
6.0	.196	.098	.028	.193	.097	.028	.185	.095	.028	.179	.093	.027	.173	.091	.027		
7.0	.184	.091	.026	.181	.090	.026	.175	.088	.025	.169	.087	.025	.163	.085	.025		
8.0	.173	.085	.024	.171	.084	.024	.165	.082	.024	.159	.081	.023	.154	.079	.023		
9.0	.164	.079	.022	.161	.078	.022	.156	.077	.022	.151	.076	.022	.146	.074	.021		
10.0	.155	.074	.021	.152	.074	.021	.148	.072	.020	.143	.071	.020	.139	.070	.020		

ρ _{CC}	80%			70%			50%			30%			10%			0	
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021		
1.0	.179	.159	.141	.153	.137	.121	.105	.094	.084	.060	.054	.049	.019	.017	.016		
2.0	.169	.135	.105	.145	.116	.091	.099	.080	.064	.057	.047	.037	.018	.015	.012		
3.0	.161	.117	.081	.138	.101	.071	.095	.070	.049	.055	.041	.029	.018	.013	.010		
4.0	.153	.103	.065	.131	.089	.056	.090	.062	.040	.052	.036	.023	.017	.012	.008		
5.0	.146	.092	.053	.125	.080	.046	.086	.056	.032	.050	.033	.019	.016	.011	.006		
6.0	.139	.084	.044	.119	.073	.038	.082	.051	.027	.048	.030	.016	.015	.010	.005		
7.0	.133	.077	.038	.114	.067	.033	.079	.047	.023	.046	.027	.014	.015	.009	.005		
8.0	.126	.071	.033	.109	.062	.029	.075	.043	.020	.044	.025	.012	.014	.008	.004		
9.0	.121	.066	.029	.104	.057	.025	.072	.040	.018	.042	.024	.011	.014	.008	.004		
10.0	.116	.062	.026	.100	.054	.023	.069	.038	.016	.040	.022	.010	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 赛库感应地插太阳能灯					TYPE:6938405330					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:A2021111101				
MFR.: EVERFINE					SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					17.3	18.7	17.6	18.9	19.1	16.4	17.7	16.6	17.9	18.1
3H					18.1	19.4	18.4	19.6	19.8	17.1	18.4	17.4	18.6	18.8
4H					18.4	19.6	18.7	19.8	20.1	17.3	18.5	17.6	18.7	19.0
6H					18.5	19.7	18.9	19.9	20.2	17.3	18.4	17.6	18.7	19.0
8H					18.6	19.7	18.9	20.0	20.2	17.3	18.4	17.6	18.6	18.9
12H					18.6	19.7	19.0	19.9	20.3	17.2	18.3	17.6	18.6	18.9
4H 2H					17.7	18.9	18.0	19.2	19.4	17.0	18.2	17.3	18.4	18.7
3H					18.6	19.7	19.0	20.0	20.3	17.9	18.9	18.2	19.2	19.5
4H					19.0	20.0	19.4	20.3	20.6	18.2	19.1	18.5	19.4	19.8
6H					19.3	20.1	19.7	20.5	20.9	18.2	19.1	18.6	19.4	19.8
8H					19.4	20.2	19.8	20.5	20.9	18.2	19.0	18.6	19.4	19.7
12H					19.5	20.2	19.9	20.5	20.9	18.2	18.9	18.6	19.3	19.7
8H 4H					19.2	19.9	19.6	20.3	20.7	18.4	19.1	18.8	19.5	19.9
6H					19.5	20.2	20.0	20.6	21.0	18.5	19.2	19.0	19.6	20.0
8H					19.7	20.3	20.2	20.7	21.1	18.6	19.1	19.0	19.6	20.0
12H					19.8	20.3	20.3	20.7	21.2	18.6	19.0	19.0	19.5	20.0
12H 4H					19.1	19.8	19.6	20.2	20.6	18.4	19.1	18.8	19.4	19.8
6H					19.6	20.1	20.0	20.5	21.0	18.6	19.1	19.0	19.6	20.0
8H					19.7	20.2	20.2	20.7	21.1	18.6	19.1	19.1	19.6	20.0
Variations with the observer position at spacings:														
S = 1.0H					+ 0.2 / - 0.2					+ 0.3 / - 0.5				
1.5H					+ 0.4 / - 0.5					+ 0.3 / - 0.5				
2.0H					+ 0.9 / - 1.0					+ 0.4 / - 0.9				

CIE Pub.117, 352.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.6)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.606m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) × RCR = 5									
k = 0.60	63	52	46	62	52	46	61	51	45	40
0.80	73	63	56	72	62	56	70	61	55	49
1.00	82	72	65	80	71	65	78	72	64	58
1.25	88	79	73	87	79	73	84	77	72	65
1.50	93	84	79	91	84	78	89	82	77	70
2.00	99	92	86	97	91	86	94	88	84	77
2.50	102	96	91	100	94	90	97	92	88	80
3.00	105	99	95	103	98	94	99	95	91	84
4.00	108	104	100	106	102	98	102	99	96	87
5.00	110	106	103	108	104	101	104	101	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:

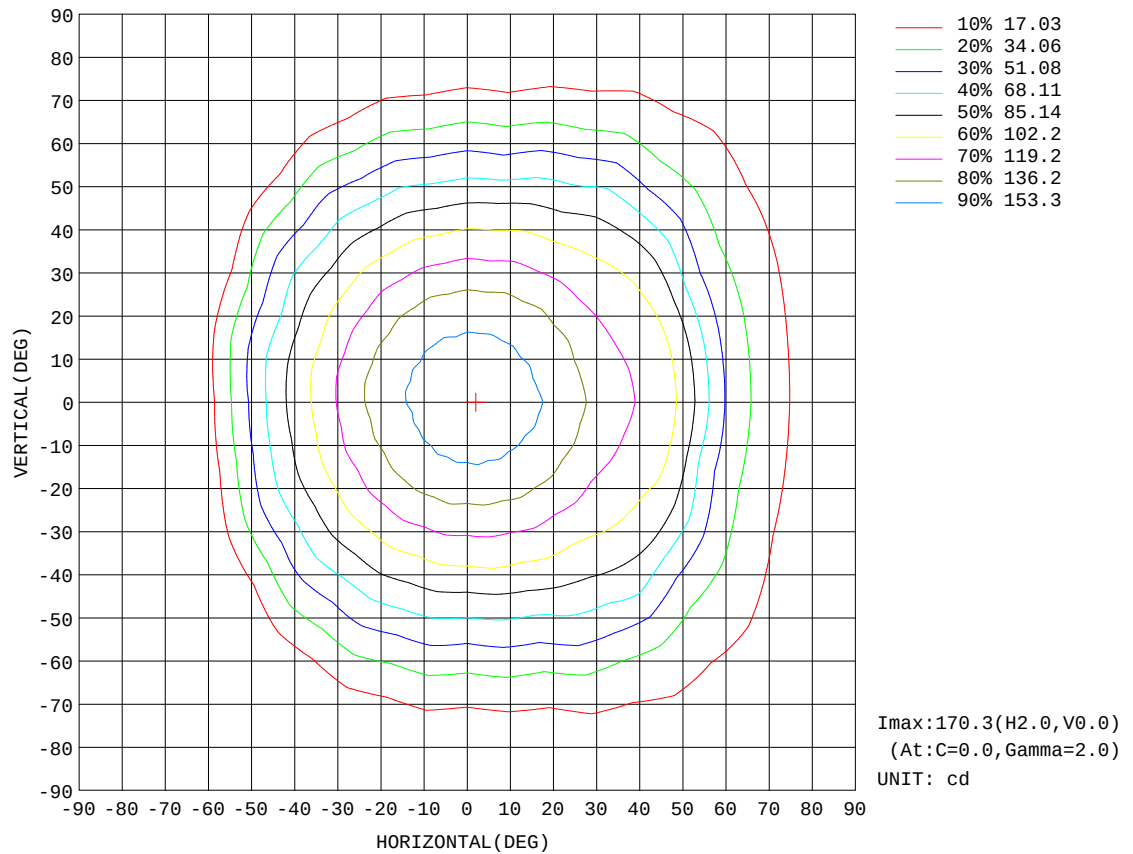


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks:

AAI Figure

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:

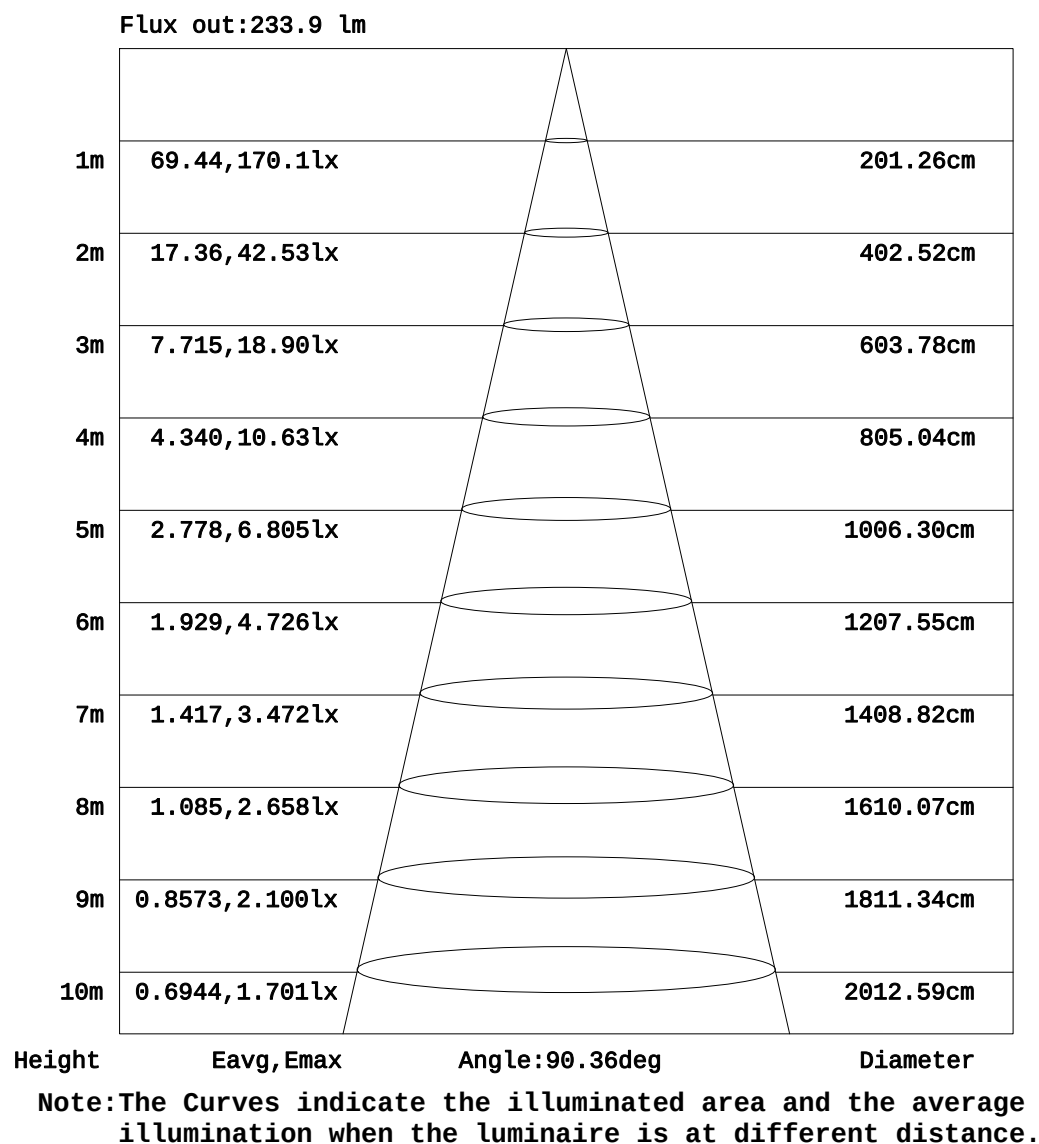


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-11-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.606m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:

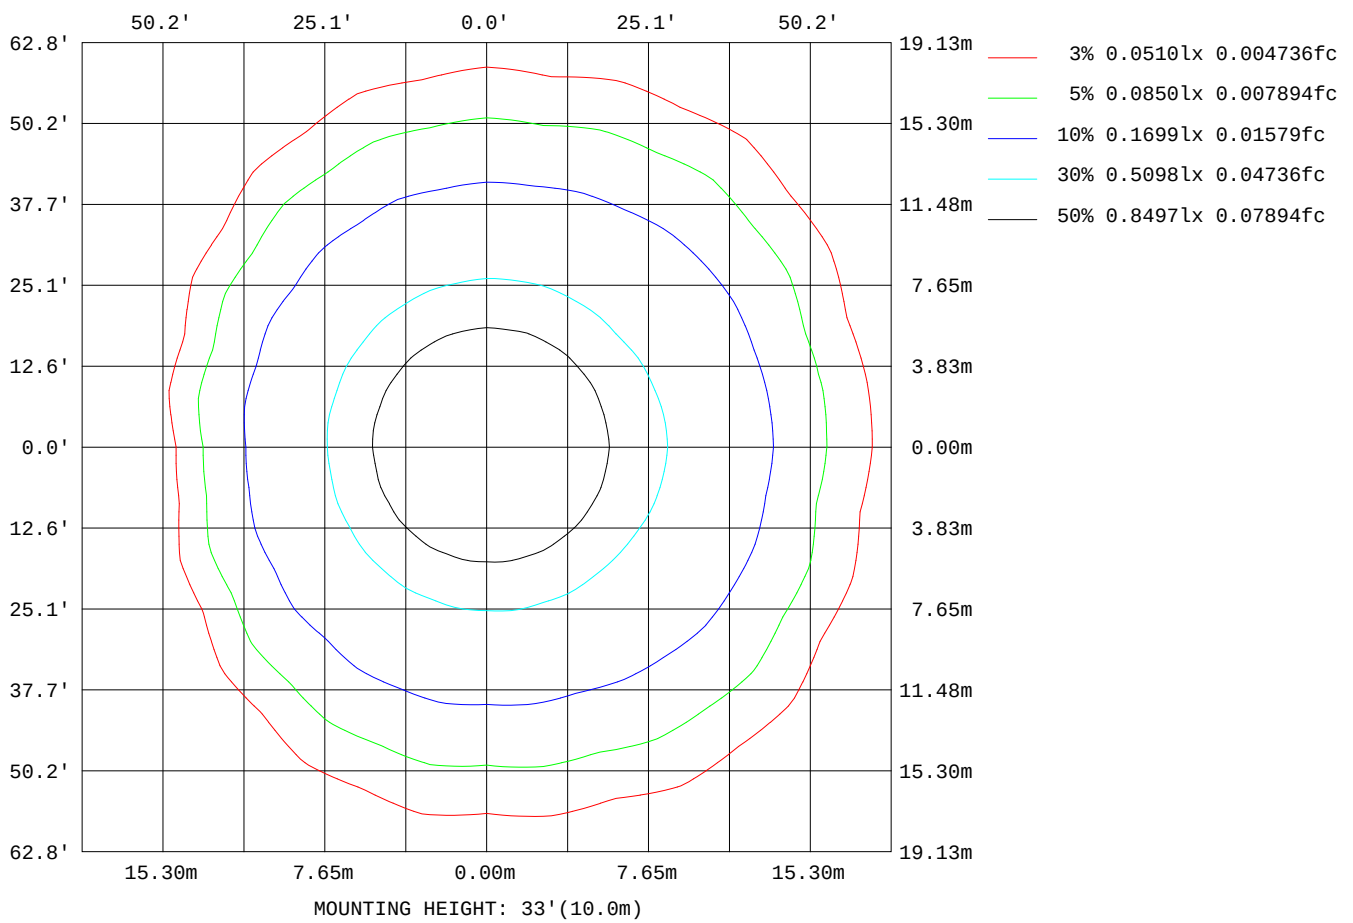

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	481
L_0~180(75)av	330
L_0~180(85)av	257
L_90~270(65)av	746
L_90~270(75)av	445
L_90~270(85)av	140
L_45(65)av	684
L_45(75)av	368
L_45(85)av	221

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks:

Planar Illuminance Curve

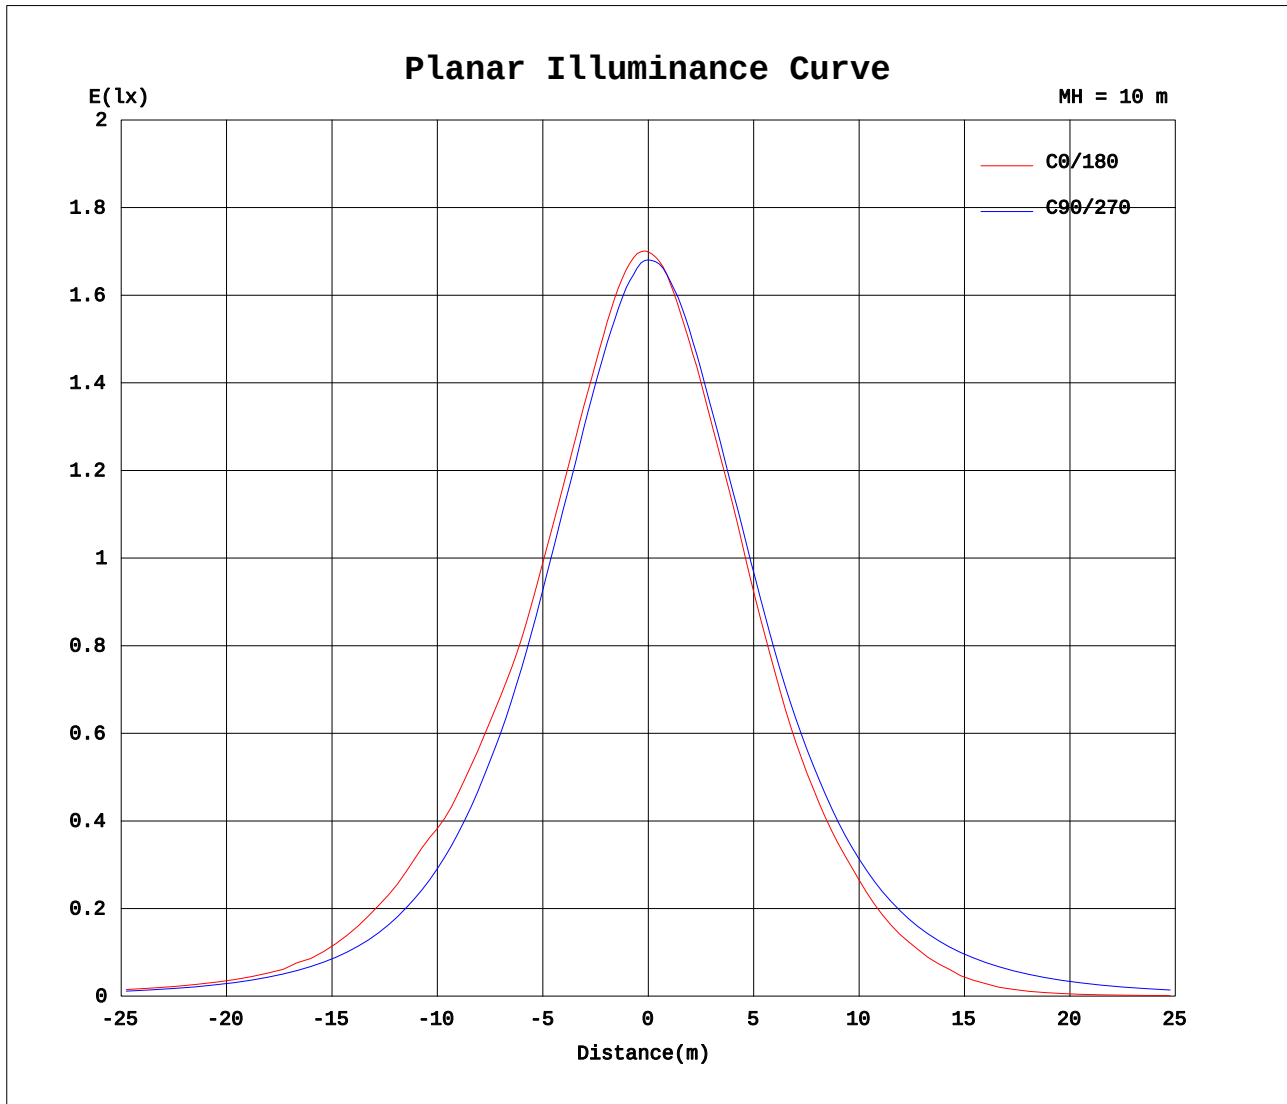

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-11-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.606m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	170	169	169	169	168	168	168	168	168	168	168	168	168	168	168	168	168	168	170
5	169	168	168	167	167	166	166	166	166	165	165	165	165	164	165	165	165	165	167
10	164	163	163	162	162	160	161	160	160	159	159	158	159	158	159	158	158	158	159
15	157	155	156	154	154	153	154	152	153	152	152	151	151	150	151	150	151	150	152
20	149	147	148	146	146	145	145	144	144	143	143	142	143	142	142	141	142	142	144
25	141	139	139	137	138	136	137	135	135	133	134	132	133	132	132	131	132	131	133
30	131	130	130	128	128	125	126	123	123	121	122	120	121	120	120	118	120	118	120
35	125	122	120	116	116	114	114	111	111	109	110	108	109	107	107	105	105	104	105
40	117	115	112	108	105	103	102	99.4	99.2	96.4	96.5	94.9	95.6	93.0	93.3	90.4	91.6	89.6	91.0
45	108	106	104	101	98.1	91.8	90.2	86.4	85.1	82.4	83.3	81.3	81.7	78.6	78.7	75.6	76.2	74.3	75.0
50	96.0	93.1	95.0	90.5	85.9	81.0	77.0	72.5	70.8	68.0	69.8	67.3	67.3	62.6	63.4	57.8	58.8	53.5	53.6
55	73.9	66.6	73.9	72.7	74.1	65.8	64.3	57.3	57.0	53.5	56.6	52.8	54.1	47.6	47.6	39.9	40.3	32.9	32.6
60	49.3	46.5	52.6	50.6	56.4	52.8	51.5	44.0	44.1	40.7	43.4	39.4	40.0	32.8	31.5	21.4	20.1	12.9	12.7
65	35.9	33.3	36.4	34.8	39.5	37.1	37.9	31.4	32.1	29.0	31.1	27.0	26.7	18.8	15.6	7.30	6.87	4.79	4.77
70	25.3	23.2	25.7	24.2	27.1	24.9	25.8	20.6	21.0	18.4	20.4	16.2	15.1	7.74	4.98	2.57	2.70	1.98	1.96
75	16.7	15.0	17.1	15.7	17.9	15.6	16.2	11.9	11.8	9.82	11.4	8.25	6.41	1.64	1.38	0.66	0.78	0.45	0.42
80	9.72	8.36	9.92	8.67	10.2	8.18	8.65	5.41	4.83	3.79	5.05	2.08	0.85	0.18	0.15	0.06	0.07	0.04	0.05
85	4.43	3.43	4.38	3.33	4.22	2.81	3.13	1.47	1.35	0.76	0.65	0.09	0.07	0.04	0.05	0.05	0.05	0.04	0.04
90	1.19	0.80	1.09	0.72	0.90	0.55	0.60	0.35	0.30	0.09	0.05	0.05	0.06	0.04	0.05	0.05	0.03	0.05	0.05
95	0.61	0.56	0.58	0.52	0.48	0.37	0.28	0.14	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.04	0.05	0.06
100	0.57	0.53	0.54	0.45	0.40	0.26	0.17	0.06	0.05	0.06	0.06	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.06
105	0.53	0.47	0.46	0.34	0.27	0.11	0.06	0.06	0.05	0.06	0.06	0.07	0.06	0.06	0.06	0.07	0.06	0.07	0.06
110	0.43	0.34	0.34	0.17	0.09	0.07	0.06	0.07	0.08	0.08	0.07	0.08	0.07	0.08	0.09	0.08	0.08	0.08	0.07
115	0.18	0.06	0.10	0.06	0.08	0.10	0.09	0.10	0.09	0.10	0.10	0.10	0.10	0.12	0.10	0.11	0.11	0.12	0.10
120	0.11	0.08	0.11	0.09	0.11	0.12	0.12	0.11	0.11	0.12	0.13	0.14	0.13	0.13	0.13	0.14	0.12	0.13	0.10
125	0.13	0.12	0.14	0.12	0.14	0.14	0.14	0.15	0.14	0.15	0.14	0.15	0.15	0.16	0.15	0.16	0.15	0.16	0.11
130	0.16	0.15	0.16	0.15	0.17	0.18	0.17	0.18	0.17	0.18	0.17	0.20	0.17	0.18	0.18	0.18	0.18	0.19	0.12
135	0.19	0.17	0.20	0.20	0.21	0.21	0.20	0.21	0.20	0.21	0.21	0.22	0.21	0.22	0.21	0.22	0.21	0.22	0.14
140	0.23	0.20	0.22	0.24	0.27	0.24	0.25	0.25	0.23	0.25	0.24	0.25	0.25	0.26	0.24	0.26	0.25	0.25	0.16
145	0.27	0.25	0.27	0.31	0.34	0.34	0.29	0.28	0.27	0.28	0.28	0.28	0.28	0.29	0.29	0.29	0.29	0.30	0.19
150	0.31	0.30	0.31	0.33	0.36	0.35	0.32	0.32	0.31	0.32	0.32	0.33	0.33	0.34	0.33	0.33	0.32	0.32	0.22
155	0.35	0.33	0.33	0.34	0.37	0.36	0.35	0.36	0.37	0.42	0.40	0.41	0.38	0.37	0.36	0.37	0.35	0.36	0.22
160	0.37	0.35	0.37	0.37	0.37	0.38	0.37	0.38	0.46	0.45	0.40	0.46	0.43	0.42	0.39	0.38	0.38	0.38	0.23
165	0.38	0.37	0.39	0.38	0.38	0.39	0.38	0.43	0.49	0.46	0.40	0.42	0.46	0.42	0.40	0.39	0.41	0.41	0.25
170	0.39	0.36	0.39	0.37	0.38	0.38	0.40	0.47	0.50	0.37	0.38	0.37	0.38	0.38	0.41	0.37	0.37	0.38	0.21
175	0.35	0.32	0.35	0.33	0.34	0.33	0.33	0.34	0.34	0.33	0.34	0.34	0.33	0.33	0.34	0.33	0.34	0.34	0.18
180	0.27	0.25	0.27	0.25	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.25	0.26	0.26	0.26	0.26	0.26	0.25	0.27

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 赛库感应地插太阳能灯	TYPE: 6938405330	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021111101
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C (DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	169	169	169	168	168	168	168	168	168	168	168	168	168	168	168	168	168		
5	167	166	166	166	166	166	166	166	167	167	167	167	167	167	167	167	167		
10	160	159	160	160	161	161	161	161	162	162	163	162	163	162	163	162	162		
15	152	152	153	152	154	154	155	154	155	155	156	155	156	155	156	155	155		
20	144	143	144	144	145	145	147	146	147	147	149	148	148	148	148	147	148		
25	134	133	135	134	136	136	138	137	138	138	140	139	140	139	140	139	140		
30	121	120	122	122	124	124	126	126	127	127	129	129	131	130	131	130	130		
35	107	106	109	109	112	111	114	113	115	115	117	117	119	118	120	121	123		
40	92.8	92.2	94.4	94.5	97.6	97.8	100	100	103	103	106	106	108	108	112	113	116		
45	77.4	76.6	79.3	79.6	83.4	83.9	86.9	86.2	88.6	89.3	92.6	93.7	97.4	101	105	105	107		
50	57.8	57.3	62.8	62.7	68.2	69.2	72.7	72.2	74.1	74.6	78.9	80.5	86.5	88.6	94.0	93.2	95.3		
55	38.2	37.0	45.6	46.2	54.0	53.6	58.4	57.2	59.7	58.5	64.7	65.5	73.3	74.4	76.3	71.2	73.1		
60	17.3	17.4	27.9	29.9	38.5	39.2	45.1	43.5	46.7	44.8	50.9	52.2	58.0	54.5	56.1	48.6	49.4		
65	5.85	5.60	10.8	14.3	24.0	25.9	31.8	30.9	34.1	32.2	37.3	37.8	42.5	38.0	38.8	34.3	35.9		
70	2.51	2.28	3.47	4.25	11.3	14.4	20.3	20.1	22.9	21.2	25.4	25.6	29.3	26.2	27.1	24.0	25.3		
75	0.71	0.56	1.11	1.17	2.94	5.88	10.9	10.9	13.2	11.7	15.5	16.0	19.0	17.0	18.1	15.7	16.7		
80	0.05	0.05	0.10	0.11	0.49	0.73	4.46	4.69	5.77	4.65	7.85	8.30	10.8	9.37	10.5	8.71	9.71		
85	0.03	0.05	0.04	0.05	0.05	0.06	0.28	0.49	1.68	1.25	2.70	2.83	4.44	3.62	4.65	3.56	4.39		
90	0.04	0.05	0.05	0.05	0.04	0.05	0.05	0.05	0.20	0.28	0.55	0.53	0.90	0.70	1.11	0.82	1.15		
95	0.04	0.04	0.05	0.06	0.05	0.05	0.06	0.05	0.04	0.05	0.22	0.29	0.42	0.48	0.56	0.58	0.59		
100	0.05	0.05	0.05	0.06	0.06	0.05	0.06	0.05	0.06	0.04	0.07	0.16	0.32	0.39	0.49	0.54	0.58		
105	0.05	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.06	0.18	0.28	0.42	0.45	0.51		
110	0.08	0.07	0.08	0.07	0.07	0.08	0.08	0.07	0.06	0.07	0.07	0.06	0.06	0.08	0.26	0.32	0.41		
115	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.07	0.08	0.08	0.07	0.07	0.07	0.07	0.12		
120	0.07	0.09	0.10	0.09	0.10	0.09	0.09	0.09	0.08	0.09	0.08	0.09	0.08	0.08	0.08	0.08	0.07		
125	0.08	0.11	0.11	0.10	0.10	0.11	0.11	0.10	0.10	0.10	0.09	0.10	0.09	0.09	0.08	0.09	0.09		
130	0.10	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.10	0.11	0.10	0.11	0.10	0.10	0.10		
135	0.12	0.14	0.13	0.14	0.13	0.14	0.13	0.14	0.13	0.12	0.13	0.13	0.12	0.12	0.11	0.11	0.12		
140	0.12	0.16	0.15	0.16	0.15	0.15	0.14	0.15	0.14	0.14	0.14	0.14	0.15	0.14	0.13	0.13	0.13		
145	0.15	0.18	0.17	0.18	0.17	0.18	0.17	0.17	0.16	0.17	0.16	0.15	0.16	0.16	0.16	0.16	0.15		
150	0.19	0.20	0.20	0.19	0.20	0.19	0.19	0.20	0.18	0.18	0.17	0.18	0.18	0.18	0.19	0.18	0.18		
155	0.21	0.21	0.21	0.21	0.21	0.24	0.25	0.24	0.20	0.21	0.20	0.20	0.19	0.19	0.19	0.20	0.20		
160	0.21	0.22	0.23	0.23	0.25	0.26	0.30	0.24	0.23	0.23	0.21	0.22	0.21	0.20	0.21	0.21	0.21		
165	0.23	0.26	0.25	0.24	0.26	0.26	0.25	0.22	0.25	0.28	0.24	0.22	0.22	0.21	0.22	0.22	0.22		
170	0.20	0.21	0.21	0.21	0.23	0.22	0.22	0.21	0.25	0.26	0.26	0.24	0.22	0.21	0.20	0.20	0.21		
175	0.16	0.17	0.17	0.17	0.18	0.17	0.17	0.17	0.18	0.17	0.17	0.17	0.18	0.17	0.18	0.18	0.18		
180	0.25	0.25	0.24	0.25	0.25	0.25	0.25	0.25	0.25	0.26	0.24	0.26	0.24	0.25	0.25	0.26	0.24		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-11-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.606m [K=1.0000]
Remarks: