

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

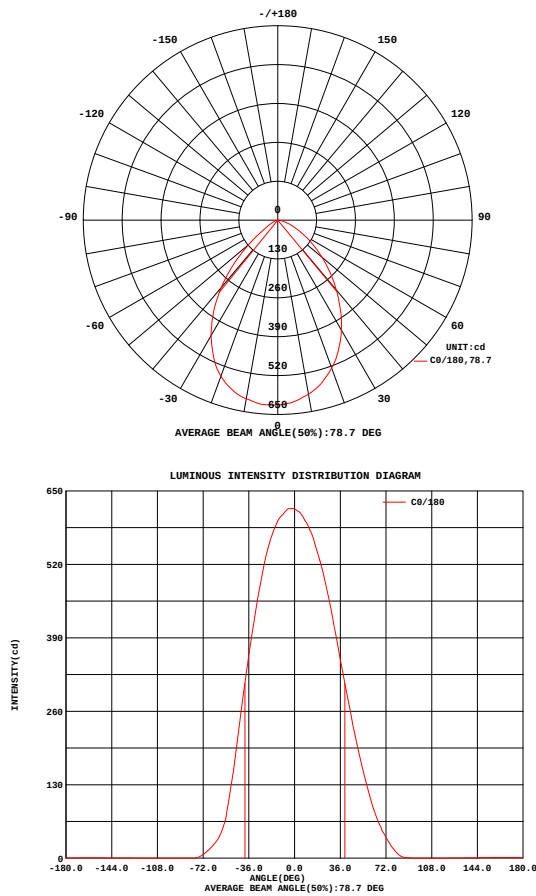


Fig. C0/C180

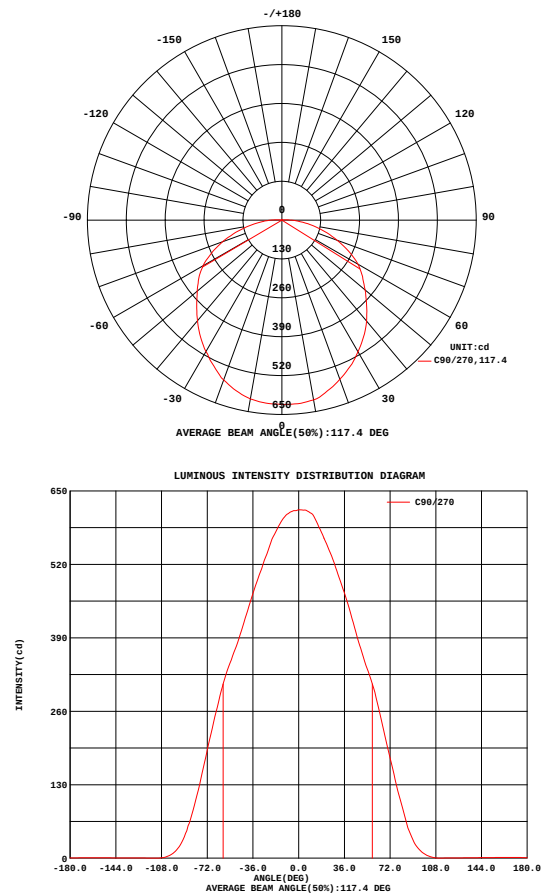


Fig. C90/C270

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-10-09


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.615m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE: 7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 70.27 lm/W
MODEL		I _{max} (cd)	619.5	S/MH(C0/180)	1.10	
NOMINAL POWER(W)	20.27	LOR(%)	100.0	S/MH(C90/270)	1.23	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	1424.2	η UP, DN(C0-180)	0.4, 49.7	
NOMINAL FLUX(lm)	1424.17	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.4, 49.5	
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	230	η down(%)	99.2	CIBSE SHR MAX	1.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

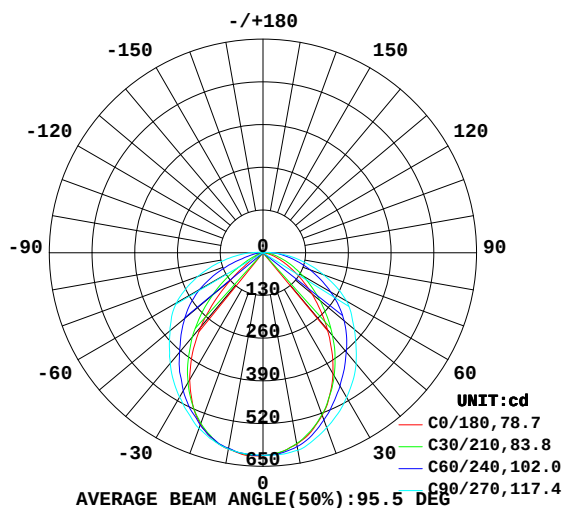

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

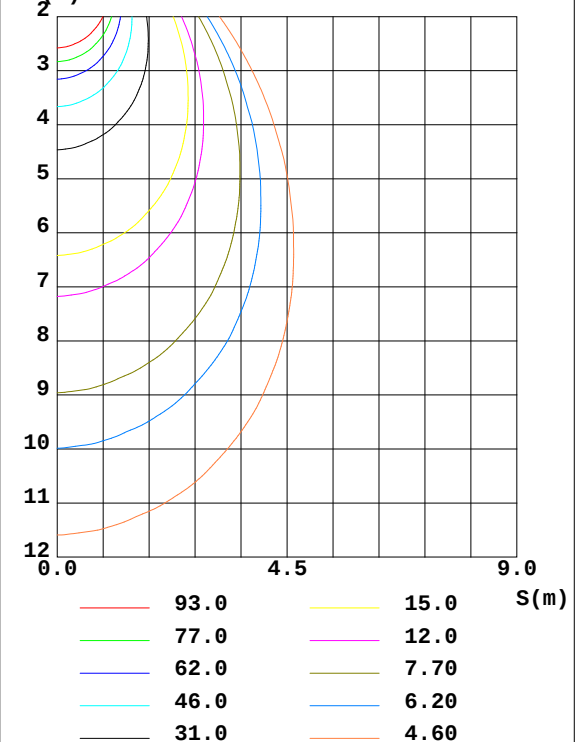

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.615m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	591.5	593.4	610.3	612.7	606.2	604.6	606.8	596.3	0- 10	58.23	58.23	4.09,4.09
20	526.6	529.3	566.4	567.6	555.9	552.8	569.1	536.0	10- 20	163.6	221.8	15.6,15.6
30	425.7	447.7	508.9	479.0	446.4	466.5	507.3	456.9	20- 30	235.2	457.0	32.1,32.1
40	304.5	362.9	440.9	379.0	294.2	362.7	438.9	375.2	30- 40	262.3	719.3	50.5,50.5
50	193.9	273.0	363.2	278.1	128.3	256.7	369.8	294.5	40- 50	246.2	965.6	67.8,67.8
60	103.8	185.2	293.5	174.4	34.84	146.2	304.1	204.2	50- 60	200.4	1166	81.9,81.9
70	45.07	109.9	196.3	72.05	9.806	50.23	210.7	122.7	60- 70	138.6	1305	91.6,91.6
80	10.87	53.49	104.0	20.29	0.0674	16.27	112.1	64.40	70- 80	76.91	1381	97,97
90	0.6576	18.69	32.56	5.486	0.0803	3.544	38.02	23.30	80- 90	31.53	1413	99.2,99.2
100	0.0875	2.287	6.305	0.2706	0.1084	0.1555	6.919	2.958	90-100	8.072	1421	99.8,99.8
110	0.1122	0.1856	0.2634	0.1855	0.1542	0.1687	0.2658	0.1935	100-110	0.9258	1422	99.8,99.8
120	0.2727	0.3243	0.3927	0.3441	0.2172	0.2402	0.2772	0.2251	110-120	0.2235	1422	99.9,99.9
130	0.4970	0.5181	0.5798	0.5567	0.2977	0.3274	0.3628	0.3075	120-130	0.3198	1423	99.9,99.9
140	0.7418	0.7574	0.8042	0.7780	0.4255	0.4471	0.4561	0.4202	130-140	0.3967	1423	99.9,99.9
150	1.026	1.027	1.044	1.040	0.5807	0.6084	0.6236	0.5812	140-150	0.4425	1423	99.9,99.9
160	1.259	1.236	1.238	1.252	0.6846	0.6997	0.6939	0.6859	150-160	0.4138	1424	100,100
170	1.311	1.284	1.283	1.323	0.6832	0.6943	0.6667	0.6513	160-170	0.2816	1424	100,100
180	0.6976	0.6799	0.6869	0.7053	0.6619	0.6527	0.6634	0.6752	170-180	0.0851	1424	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.615m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE: 7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:

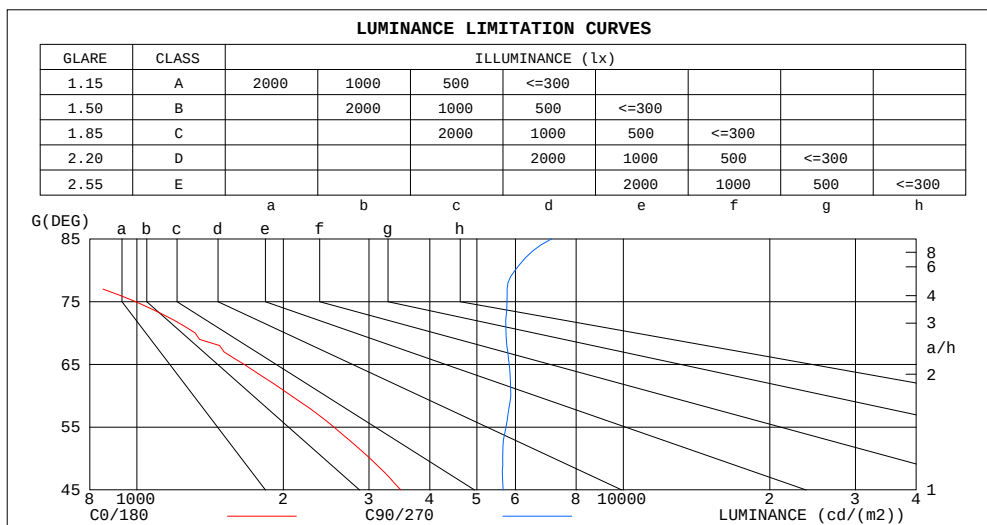

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	268	7124
80	626	5991
75	993	5764
70	1318	5739
65	1660	5828
60	2076	5871
55	2542	5739
50	3016	5650
45	3489	5662

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.615m [K=1.0000]
 Remarks:

```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.615m [K=1.0000]
Remarks:

```

WEC AND CCEC

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE:7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.294	.167	.053	.286	.163	.052	.273	.157	.050	.260	.150	.048	.249	.144	.046		
2.0	.275	.151	.046	.268	.148	.046	.257	.143	.044	.246	.138	.043	.235	.133	.042		
3.0	.255	.136	.041	.249	.133	.040	.239	.129	.039	.229	.125	.038	.220	.122	.038		
4.0	.236	.123	.036	.231	.121	.036	.222	.118	.035	.213	.114	.034	.205	.111	.034		
5.0	.219	.112	.032	.215	.110	.032	.206	.107	.032	.199	.105	.031	.191	.102	.031		
6.0	.204	.102	.029	.200	.101	.029	.192	.099	.029	.186	.096	.028	.179	.094	.028		
7.0	.190	.094	.027	.187	.093	.027	.180	.091	.026	.174	.089	.026	.168	.087	.026		
8.0	.178	.087	.024	.175	.086	.024	.169	.085	.024	.164	.083	.024	.158	.081	.024		
9.0	.168	.081	.023	.165	.080	.023	.159	.079	.022	.154	.077	.022	.150	.076	.022		
10.0	.158	.076	.021	.155	.075	.021	.151	.074	.021	.146	.072	.021	.142	.071	.020		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.185	.162	.142	.158	.139	.122	.108	.096	.084	.062	.055	.049	.020	.018	.016	
2.0	.176	.138	.106	.151	.119	.092	.103	.082	.064	.060	.048	.038	.019	.015	.012	
3.0	.168	.120	.083	.144	.104	.072	.099	.072	.050	.057	.042	.030	.018	.014	.010	
4.0	.160	.107	.066	.137	.092	.058	.094	.064	.041	.055	.038	.024	.018	.012	.008	
5.0	.152	.096	.055	.131	.083	.048	.090	.058	.034	.052	.034	.020	.017	.011	.007	
6.0	.145	.088	.047	.125	.076	.041	.086	.053	.029	.050	.031	.017	.016	.010	.006	
7.0	.138	.081	.041	.119	.070	.035	.082	.049	.025	.048	.029	.015	.015	.009	.005	
8.0	.132	.075	.036	.114	.065	.031	.079	.046	.022	.046	.027	.013	.015	.009	.004	
9.0	.126	.070	.032	.109	.061	.028	.075	.043	.020	.044	.025	.012	.014	.008	.004	
10.0	.121	.066	.029	.104	.057	.026	.072	.040	.018	.042	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.615m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 一体式炫普LED双头摄像头III-EU安防灯						TYPE: 7622220012			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.: A2021100903		
MFR.: EVERFINE						SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		14.0	15.4	14.2	15.6	15.8	18.1	19.5	18.4	19.7	20.0
	3H	14.4	15.8	14.8	16.0	16.3	20.0	21.3	20.3	21.6	21.8
	4H	14.5	15.8	14.9	16.1	16.3	20.9	22.2	21.2	22.4	22.7
	6H	14.5	15.7	14.9	16.0	16.3	21.7	22.9	22.0	23.1	23.4
	8H	14.5	15.6	14.8	15.9	16.2	22.0	23.2	22.4	23.5	23.8
	12H	14.5	15.6	14.8	15.9	16.2	22.3	23.4	22.7	23.7	24.0
4H	2H	15.1	16.3	15.4	16.6	16.8	18.3	19.5	18.6	19.8	20.1
	3H	15.7	16.8	16.1	17.2	17.5	20.4	21.5	20.8	21.8	22.2
	4H	15.9	16.9	16.3	17.3	17.6	21.5	22.5	21.9	22.8	23.2
	6H	16.0	16.9	16.4	17.2	17.6	22.5	23.4	22.9	23.8	24.1
	8H	16.0	16.8	16.4	17.2	17.6	23.0	23.8	23.4	24.2	24.6
	12H	15.9	16.7	16.4	17.1	17.5	23.4	24.2	23.9	24.6	25.0
8H	4H	16.7	17.5	17.1	17.9	18.3	21.6	22.4	22.0	22.8	23.2
	6H	17.0	17.6	17.4	18.1	18.5	22.7	23.4	23.2	23.9	24.3
	8H	17.0	17.6	17.5	18.1	18.5	23.4	24.0	23.8	24.4	24.9
	12H	17.0	17.5	17.5	18.0	18.5	24.0	24.5	24.5	25.0	25.5
12H	4H	16.9	17.7	17.4	18.1	18.5	21.5	22.3	22.0	22.7	23.1
	6H	17.3	17.9	17.8	18.3	18.8	22.7	23.4	23.2	23.8	24.3
	8H	17.4	18.0	17.9	18.4	18.9	23.4	23.9	23.9	24.4	24.9
Variations with the observer position at spacings:											
S = 1.0H		+ 0.4 / - 0.4					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H		+ 0.4 / - 0.8					+ 0.2 / - 0.4				

CIE Pub.117, 1424 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 1.2$)
Area: 0.1 m²

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.615m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE: 7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) × RCR = 5									
k = 0.60	61	50	43	60	50	43	59	49	43	37
0.80	71	60	53	70	59	53	68	59	52	46
1.00	79	68	62	78	68	61	75	69	61	54
1.25	86	76	69	84	75	69	82	74	68	61
1.50	90	81	75	89	80	74	86	78	73	66
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	91	86	94	89	84	76
3.00	103	97	91	101	95	90	97	92	88	80
4.00	107	101	97	104	100	96	100	96	93	84
5.00	109	104	101	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.615m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE: 7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:

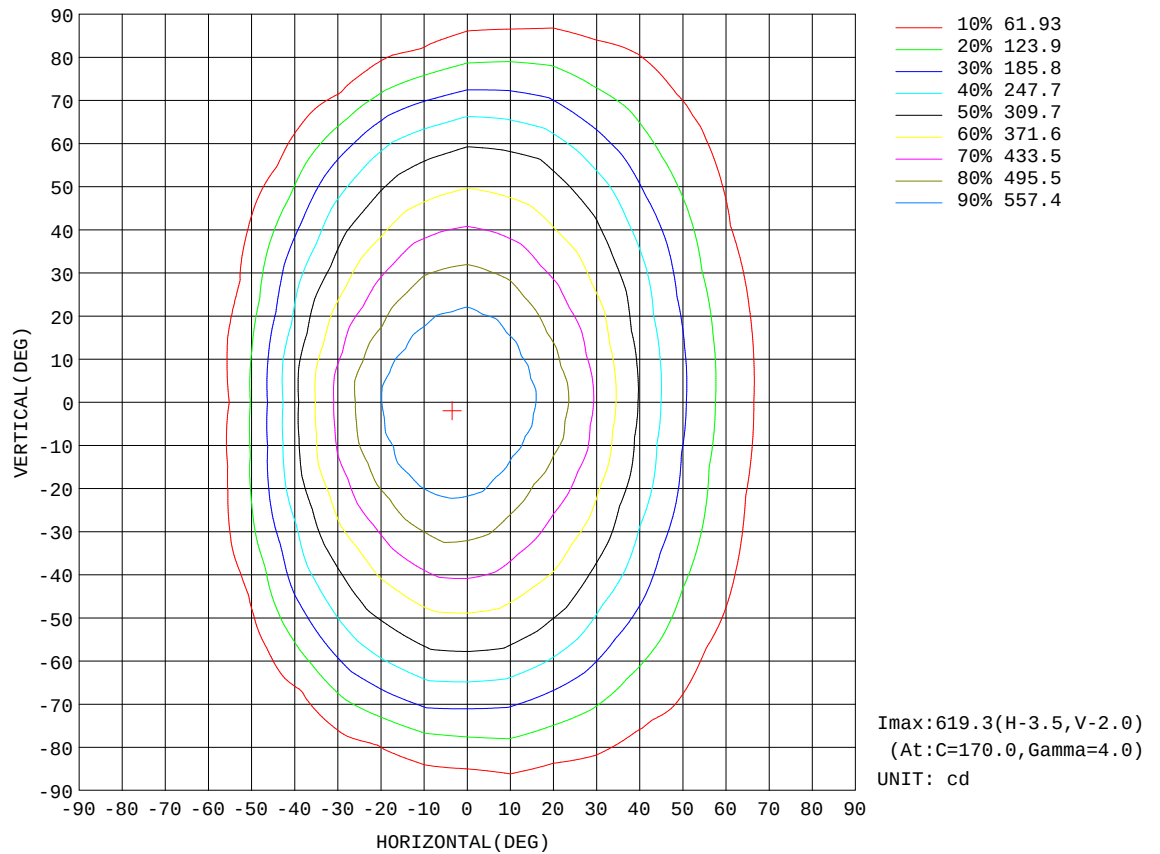


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.615m [K=1.0000]
Remarks:

AAI Figure

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE: 7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:

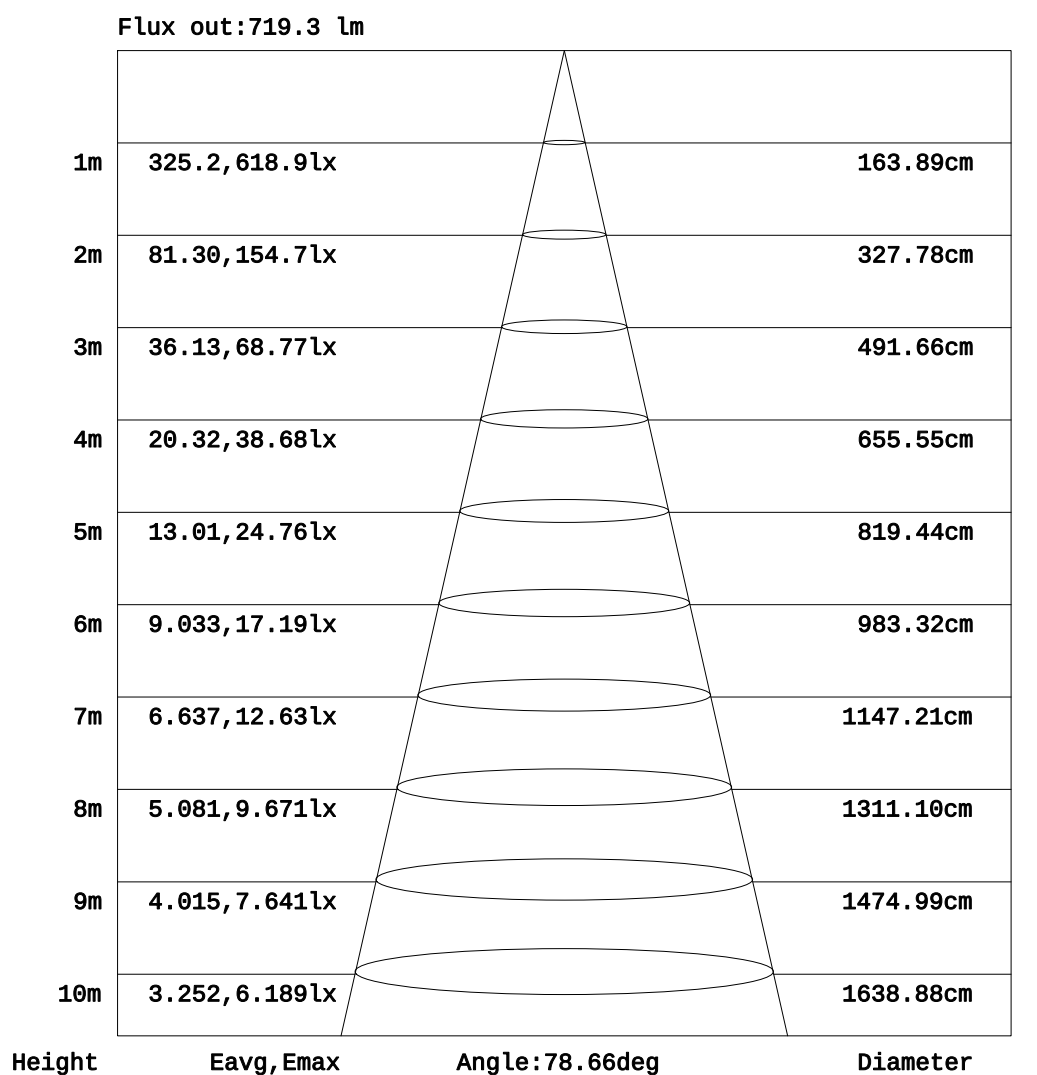


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.615m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE: 7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:

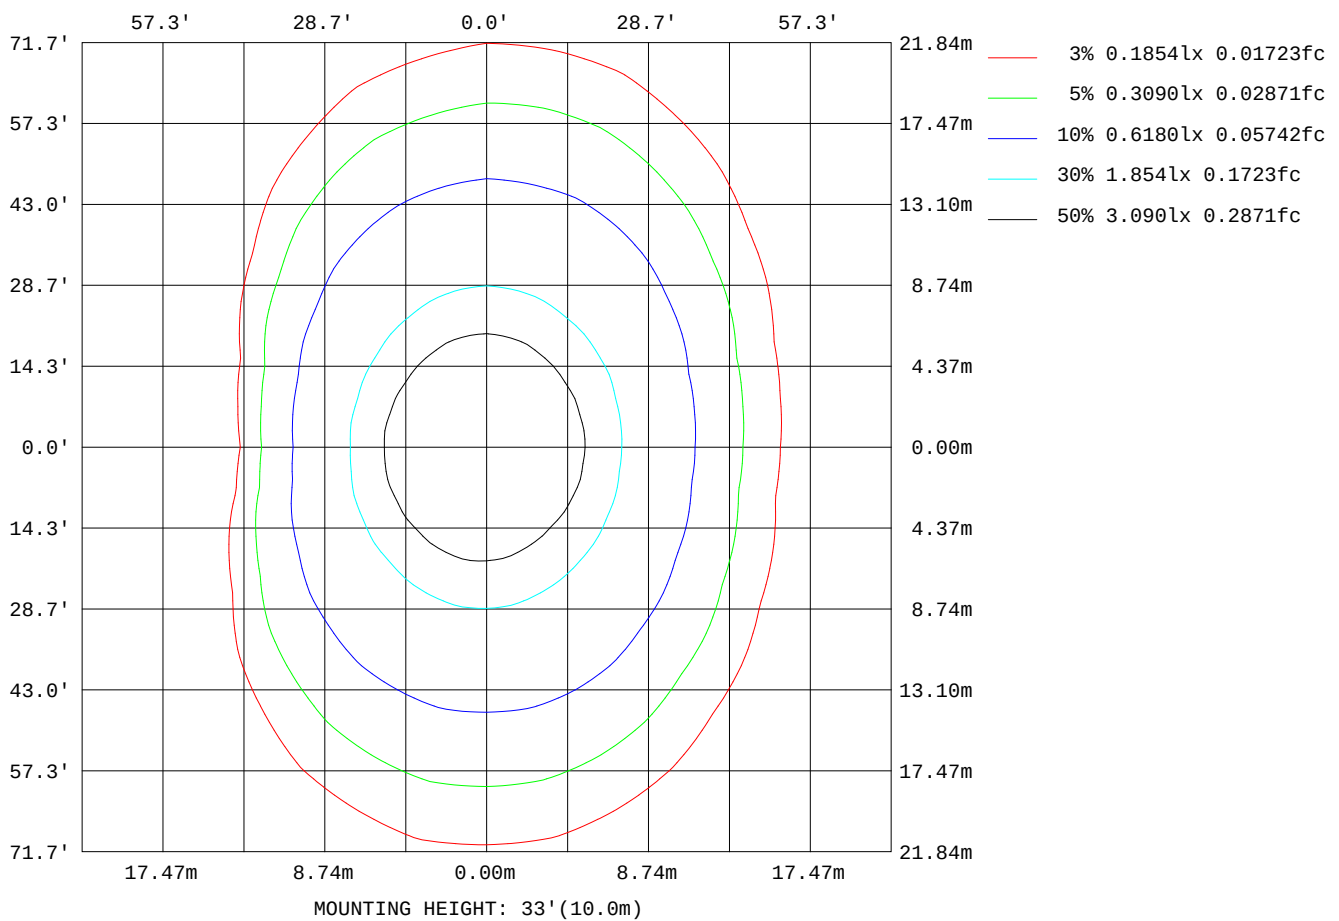

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.615m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE: 7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1074
L_0~180(75)av	541
L_0~180(85)av	137
L_90~270(65)av	5977
L_90~270(75)av	5991
L_90~270(85)av	7565
L_45(65)av	3049
L_45(75)av	2252
L_45(85)av	2755

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.615m [K=1.0000]
 Remarks:

Planar Illuminance Curve

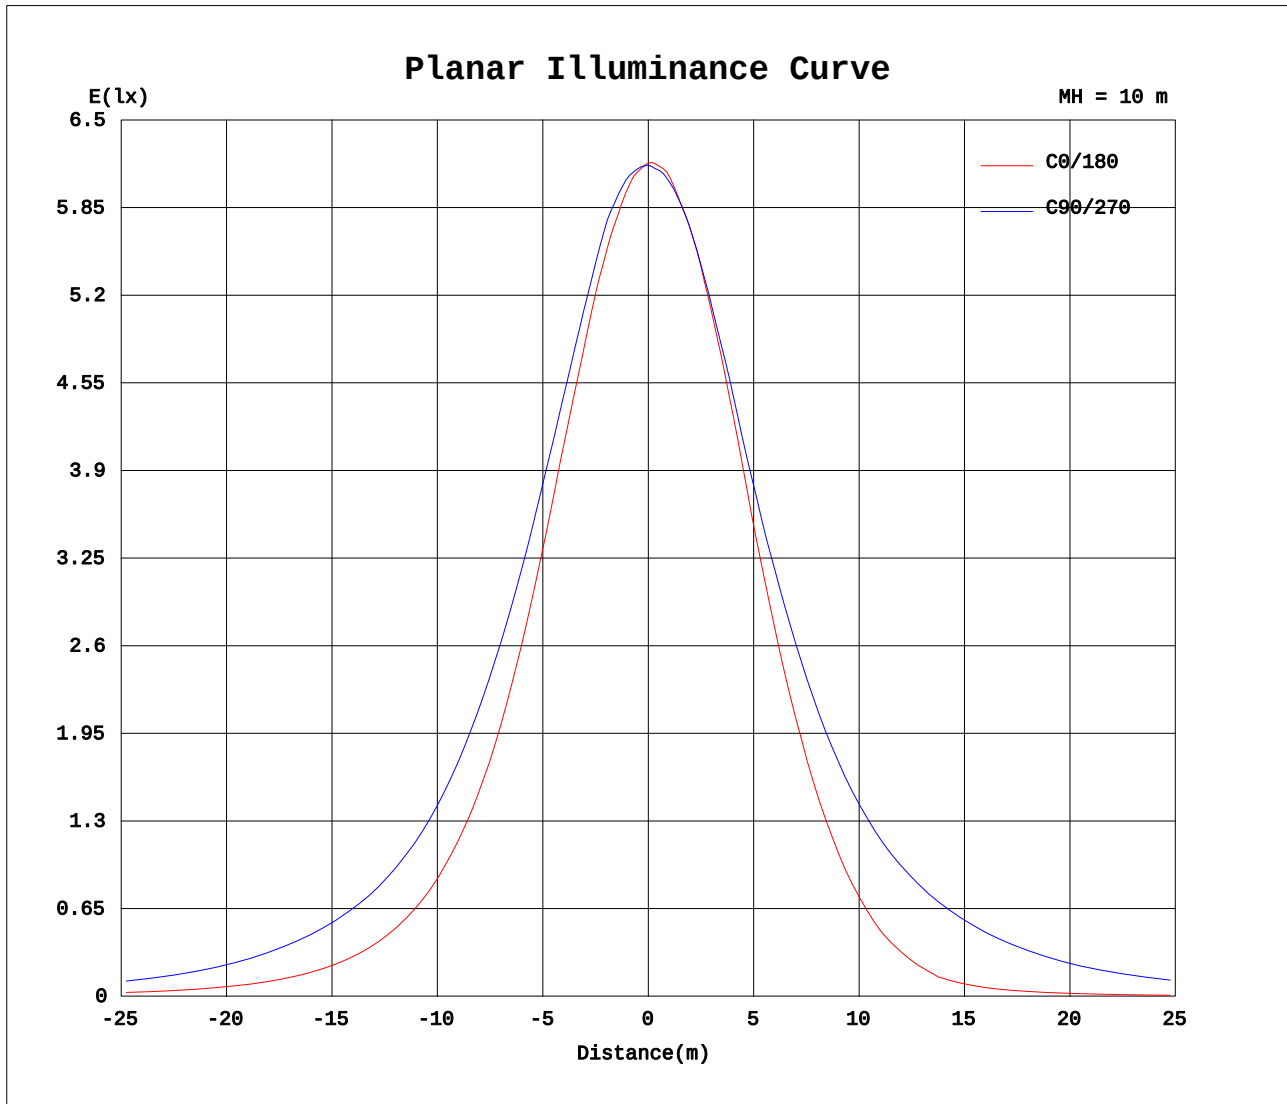

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 1.615m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE:7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	618	618	616	617	617	617	617	617	616	617	616	617	617	617	617	618	618	618	618
5	610	609	610	609	610	609	613	614	615	616	616	617	617	618	619	618	619	618	618
10	591	589	591	589	593	594	599	603	608	610	613	614	615	613	612	610	611	607	606
15	565	561	564	561	565	566	575	580	590	591	597	597	600	597	597	593	593	589	587
20	527	523	528	525	528	530	542	550	563	566	572	572	573	567	568	556	559	553	556
25	480	476	483	480	488	491	505	516	532	540	543	540	539	528	525	513	515	509	507
30	426	422	432	433	445	451	469	482	502	509	514	507	498	482	476	460	461	450	446
35	365	363	376	382	401	411	431	448	468	476	480	470	456	436	425	404	399	381	374
40	305	304	319	329	354	371	394	412	432	441	442	428	412	386	372	344	329	305	294
45	247	246	263	277	307	331	359	375	396	400	402	383	368	339	315	281	255	222	209
50	194	193	211	227	259	287	322	343	360	363	363	348	327	293	263	218	182	141	128
55	146	145	163	180	214	241	282	308	327	329	330	308	285	247	209	156	117	80.1	63.2
60	104	104	121	140	171	199	238	266	289	294	292	268	240	196	153	98.0	65.4	40.0	34.8
65	70.2	71.0	86.9	103	133	158	194	220	243	246	247	220	192	142	97.5	47.2	33.0	22.9	20.6
70	45.1	43.9	58.9	73.2	98.6	121	153	174	196	196	197	170	140	90.2	53.9	25.0	19.0	12.2	9.81
75	25.7	24.5	36.8	47.6	71.2	88.6	114	132	151	149	144	117	89.4	46.7	27.4	15.6	10.9	4.73	2.29
80	10.9	11.0	21.7	30.3	48.0	59.0	79.6	93.0	108	104	96.6	64.4	49.2	24.1	16.4	8.82	4.80	0.24	0.07
85	2.34	3.69	11.2	17.0	29.9	36.7	52.8	57.1	69.8	62.1	58.0	37.0	26.2	13.7	9.45	3.11	0.13	0.06	0.06
90	0.66	0.66	4.02	7.82	16.5	20.9	30.4	31.5	39.6	32.6	30.8	18.4	13.6	7.14	3.83	0.16	0.09	0.07	0.08
95	0.21	0.22	0.67	2.07	7.13	9.63	15.7	15.3	19.3	15.6	15.1	8.77	6.80	2.46	0.66	0.10	0.09	0.08	0.08
100	0.09	0.09	0.22	0.35	1.75	2.82	6.13	5.95	8.27	6.30	6.37	3.36	2.29	0.41	0.13	0.12	0.11	0.10	0.11
105	0.08	0.09	0.12	0.16	0.32	0.48	1.53	1.63	2.73	1.80	1.89	0.71	0.42	0.16	0.14	0.14	0.12	0.13	0.13
110	0.11	0.12	0.12	0.15	0.18	0.20	0.26	0.25	0.42	0.26	0.31	0.22	0.20	0.20	0.17	0.19	0.16	0.16	0.15
115	0.17	0.19	0.18	0.21	0.21	0.23	0.25	0.28	0.26	0.30	0.29	0.29	0.27	0.28	0.25	0.25	0.22	0.23	0.17
120	0.27	0.28	0.26	0.31	0.30	0.35	0.34	0.36	0.36	0.39	0.38	0.39	0.36	0.37	0.32	0.34	0.30	0.33	0.22
125	0.38	0.39	0.38	0.42	0.42	0.44	0.43	0.48	0.46	0.49	0.47	0.48	0.46	0.47	0.43	0.44	0.41	0.43	0.26
130	0.50	0.51	0.49	0.52	0.50	0.53	0.53	0.57	0.55	0.58	0.57	0.58	0.56	0.57	0.54	0.55	0.51	0.54	0.30
135	0.61	0.63	0.61	0.63	0.62	0.66	0.64	0.67	0.66	0.69	0.66	0.70	0.65	0.67	0.64	0.65	0.63	0.65	0.36
140	0.74	0.77	0.74	0.77	0.74	0.77	0.76	0.79	0.77	0.80	0.79	0.80	0.78	0.79	0.76	0.78	0.75	0.77	0.43
145	0.87	0.90	0.88	0.90	0.88	0.91	0.89	0.92	0.90	0.93	0.90	0.92	0.89	0.92	0.89	0.92	0.88	0.91	0.51
150	1.03	1.07	1.02	1.05	1.01	1.04	1.01	1.04	1.02	1.04	1.01	1.06	1.03	1.05	1.03	1.06	1.03	1.05	0.58
155	1.15	1.18	1.15	1.16	1.14	1.16	1.13	1.14	1.13	1.14	1.13	1.15	1.14	1.16	1.14	1.17	1.15	1.18	0.65
160	1.26	1.27	1.25	1.26	1.24	1.24	1.22	1.23	1.21	1.24	1.21	1.25	1.24	1.25	1.25	1.27	1.25	1.29	0.68
165	1.31	1.32	1.31	1.30	1.29	1.29	1.27	1.27	1.27	1.27	1.27	1.30	1.30	1.32	1.32	1.33	1.33	1.33	0.71
170	1.31	1.31	1.30	1.29	1.30	1.27	1.28	1.27	1.28	1.28	1.30	1.30	1.30	1.32	1.33	1.33	1.35	1.34	0.68
175	1.16	1.12	1.16	1.13	1.15	1.12	1.14	1.11	1.16	1.14	1.17	1.14	1.18	1.15	1.18	1.16	1.20	1.16	0.53
180	0.70	0.67	0.69	0.66	0.70	0.66	0.71	0.68	0.72	0.69	0.72	0.70	0.73	0.69	0.72	0.70	0.72	0.67	0.66

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity:65.0%
Test Distance:1.615m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 一体式炫普LED双头摄像头III-EU安防灯	TYPE: 7622220012	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: A2021100903
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C (DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	618	616	617	617	617	617	617	616	617	616	617	617	617	617	618	618	618		
5	618	616	616	615	616	614	615	613	614	613	614	613	612	609	609	608	610		
10	608	604	605	604	605	604	606	605	607	606	604	600	599	594	594	589	592		
15	590	584	587	584	588	586	590	589	591	585	588	579	575	566	566	562	565		
20	558	551	553	549	557	558	565	564	569	561	560	548	543	529	531	522	528		
25	513	505	509	507	520	525	536	535	538	533	529	514	503	490	487	477	482		
30	451	446	456	458	475	485	502	505	507	500	494	477	465	449	442	429	428		
35	382	382	397	405	426	442	462	468	475	466	459	438	425	408	395	376	370		
40	306	309	335	348	377	395	420	432	439	432	422	399	386	365	348	321	311		
45	222	232	267	293	329	353	380	393	403	394	388	367	350	321	298	266	254		
50	140	156	200	234	280	311	343	358	370	364	358	336	313	276	248	214	201		
55	76.1	91.9	137	176	229	270	305	324	339	333	328	303	272	230	199	166	153		
60	41.3	45.6	79.0	117	175	222	264	284	304	301	291	259	225	183	154	123	110		
65	24.0	24.7	41.7	66.1	119	168	216	237	259	256	246	212	179	141	113	85.9	75.4		
70	12.9	14.6	22.6	31.7	68.7	111	162	189	211	208	200	168	140	105	80.3	54.8	47.9		
75	4.78	7.36	14.4	19.5	35.8	59.7	107	136	161	161	156	128	107	76.8	55.7	33.5	28.1		
80	0.55	1.88	7.75	12.1	20.5	30.6	61.6	87.5	112	116	114	93.8	77.0	51.8	36.7	19.8	13.7		
85	0.06	0.06	2.02	5.67	12.6	17.1	32.4	46.0	69.8	74.7	76.2	60.6	52.8	32.2	22.2	10.2	5.40		
90	0.06	0.07	0.09	1.00	6.08	9.37	16.5	22.5	38.0	38.7	43.5	33.6	29.6	17.0	11.1	3.30	1.17		
95	0.08	0.09	0.09	0.09	1.62	3.76	8.40	10.4	17.7	18.1	22.4	15.6	13.9	6.55	3.60	0.61	0.34		
100	0.10	0.11	0.11	0.12	0.19	0.77	3.08	3.99	6.92	6.42	8.55	5.40	4.59	1.32	0.60	0.22	0.15		
105	0.13	0.13	0.13	0.14	0.15	0.17	0.58	0.82	1.93	1.58	2.19	0.99	0.77	0.28	0.22	0.14	0.11		
110	0.14	0.15	0.15	0.17	0.17	0.19	0.20	0.21	0.27	0.21	0.23	0.19	0.21	0.18	0.16	0.14	0.14		
115	0.17	0.18	0.19	0.20	0.21	0.22	0.23	0.24	0.25	0.24	0.23	0.21	0.20	0.19	0.18	0.18	0.15		
120	0.21	0.23	0.21	0.23	0.25	0.27	0.26	0.29	0.28	0.28	0.26	0.26	0.23	0.22	0.21	0.19	0.19		
125	0.25	0.27	0.26	0.28	0.29	0.30	0.31	0.32	0.32	0.32	0.30	0.30	0.27	0.26	0.24	0.24	0.23		
130	0.29	0.31	0.30	0.33	0.32	0.35	0.36	0.36	0.36	0.37	0.34	0.34	0.31	0.30	0.28	0.29	0.28		
135	0.35	0.37	0.37	0.38	0.38	0.40	0.41	0.41	0.41	0.41	0.40	0.40	0.37	0.36	0.33	0.34	0.33		
140	0.42	0.44	0.43	0.45	0.44	0.47	0.46	0.48	0.46	0.47	0.44	0.44	0.42	0.42	0.40	0.40	0.39		
145	0.49	0.52	0.50	0.53	0.53	0.55	0.53	0.56	0.53	0.55	0.53	0.53	0.51	0.51	0.47	0.49	0.47		
150	0.57	0.60	0.59	0.61	0.60	0.62	0.62	0.63	0.62	0.61	0.60	0.61	0.58	0.59	0.57	0.57	0.55		
155	0.64	0.66	0.65	0.66	0.65	0.67	0.66	0.67	0.65	0.67	0.65	0.65	0.63	0.64	0.62	0.64	0.62		
160	0.69	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.69	0.69	0.69	0.69	0.68	0.69	0.68	0.69	0.68		
165	0.71	0.71	0.72	0.72	0.72	0.71	0.71	0.69	0.70	0.69	0.69	0.70	0.69	0.70	0.71	0.71	0.71		
170	0.70	0.69	0.70	0.69	0.70	0.68	0.68	0.65	0.67	0.64	0.66	0.65	0.67	0.64	0.67	0.67	0.69		
175	0.57	0.53	0.57	0.53	0.55	0.51	0.54	0.50	0.53	0.48	0.51	0.49	0.52	0.49	0.53	0.51	0.54		
180	0.62	0.67	0.63	0.66	0.64	0.67	0.65	0.68	0.66	0.68	0.66	0.69	0.65	0.70	0.64	0.67	0.64		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-10-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R3000(2M2D) SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 1.615m [K=1.0000]
Remarks: