


Self-aligning ball bearings, cylindrical and tapered bore, cylindrical bore, unsealed

Principal dimensions			Basic load ratings		Fatigue	Speed ratings		Mass	Designation
d	D	B	dynamic	static	load limit P_u	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
20	47	14	12,7	3,4	0,18	32000	20000	0,12	1204 ETN9

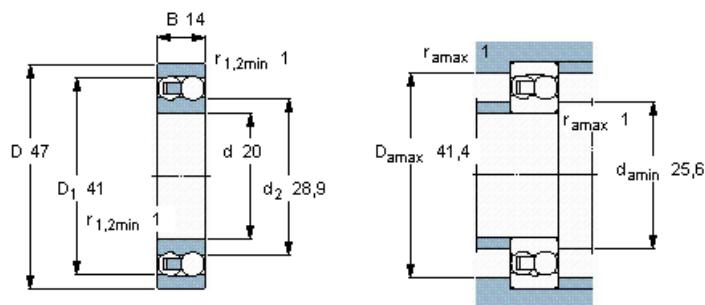

Calculation factors

e 0,3
 Y_1 2,1
 Y_2 3,3
 Y_0 2,2