


Self-aligning ball bearings, cylindrical and tapered bore, cylindrical bore, unsealed

Principal dimensions			Basic load ratings		Fatigue	Speed ratings		Mass	Designation
d	D	B	dynamic C	static C_0	load limit P_u	Reference speed r/min	Limiting speed r/min	kg	-
mm			kN		kN				
35	72	17	19	6	0,31	20000	13000	0,32	1207 ETN9

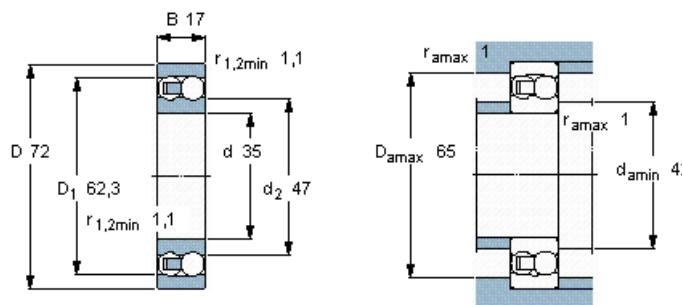

Calculation factors

e 0,23
 Y_1 2,7
 Y_2 4,2
 Y_0 2,8