


# Self-aligning ball bearings, cylindrical and tapered bore, cylindrical bore, seal on both sides



Principal dimensions			Basic load ratings		Fatigue load limit $P_u$	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
17	40	16	8,84	2,2	0,12	-	12000	0,089	2203 E-2RS1TN9

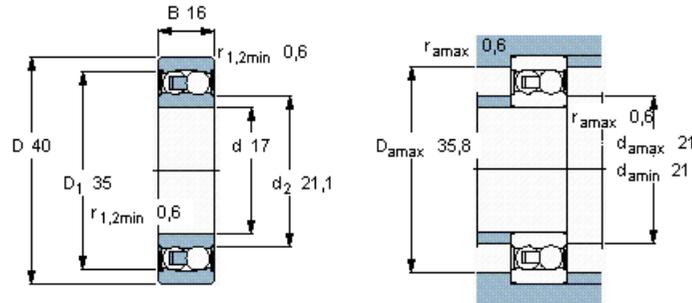

### Calculation factors

- $e$  0,31
- $Y_1$  2
- $Y_2$  3,1
- $Y_0$  2,2