


Self-aligning ball bearings, cylindrical and tapered bore, cylindrical bore, seal on both sides

Principal dimensions			Basic load ratings		Fatigue	Speed ratings		Mass	Designation
d	D	B	dynamic C	static C_0	load limit P_u	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
25	52	18	14,3	4	0,21	-	9000	0,16	2205 E-2RS1TN9

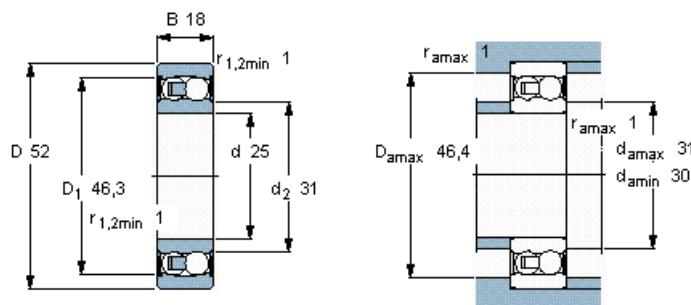

Calculation factors

e 0,28
 Y_1 2,2
 Y_2 3,5
 Y_0 2,5