


Self-aligning ball bearings, cylindrical and tapered bore, cylindrical bore, seal on both sides

Principal dimensions			Basic load ratings		Fatigue	Speed ratings		Mass	Designation
d	D	B	dynamic C	static C_0	load limit P_u	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
60	110	28	31,2	12,2	0,62	-	3800	1,05	2212 E-2RS1TN9

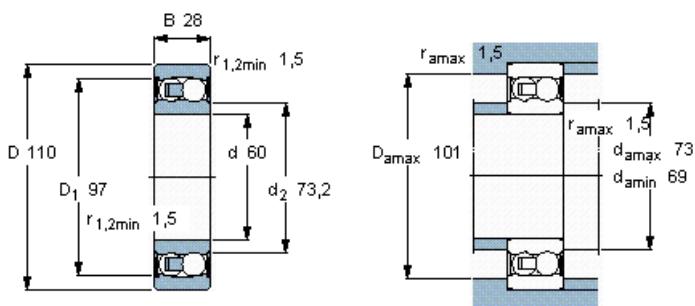

Calculation factors

e	0,19
Y_1	3,3
Y_2	5,1
Y_0	3,6