


Self-aligning ball bearings, cylindrical and tapered bore, tapered bore, unsealed



Principal dimensions			Basic load ratings		Fatigue load limit P_u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C_0	kN	r/min		kg	-
40	90	33	54	16	0,82	14000	10000	0,90	2308 EKTN9

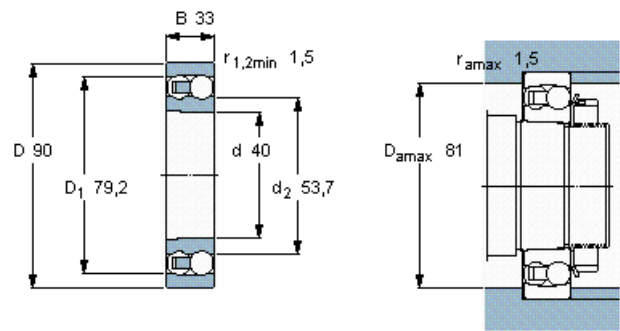

Tapered bore, taper
1: 12

Calculation factors

- e 0,4
- Y_1 1,6
- Y_2 2,4
- Y_0 1,6