


Self-aligning ball bearings, cylindrical and tapered bore, tapered bore, unsealed



Principal dimensions			Basic load ratings		Fatigue load limit P _u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C ₀	kN	r/min		kg	-
55	120	43	76,1	24	1,25	11000	7500	2,00	2311 K

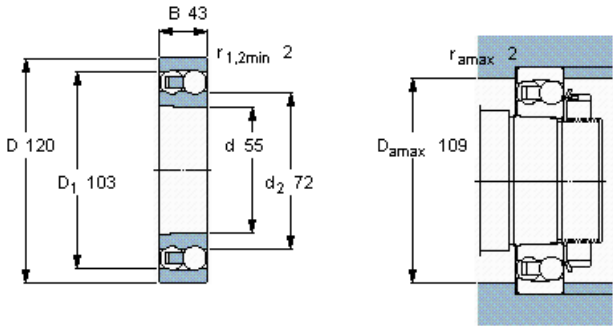

Tapered bore, taper
1: 12

Calculation factors

- e 0,4
- Y₁ 1,6
- Y₂ 2,4
- Y₀ 1,6