


Self-aligning ball bearings, cylindrical and tapered bore, tapered bore, unsealed



Principal dimensions			Basic load ratings		Fatigue load limit P _u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C ₀	kN	r/min		kg	-
60	130	46	87,1	28,5	1,46	9500	7000	2,50	2312 K

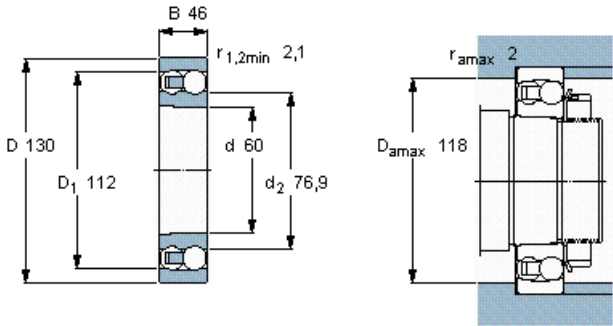

Tapered bore, taper
1: 12

Calculation factors

- e 0,33
- Y₁ 1,9
- Y₂ 3
- Y₀ 2