


Deep groove ball bearings, single row, low-friction seal on both sides



Principal dimensions			Basic load ratings		Fatigue load limit P_u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C_0	kN	r/min		kg	-
15	28	7	4,36	2,24	0,095	56000	28000	0,016	61902-2RZ

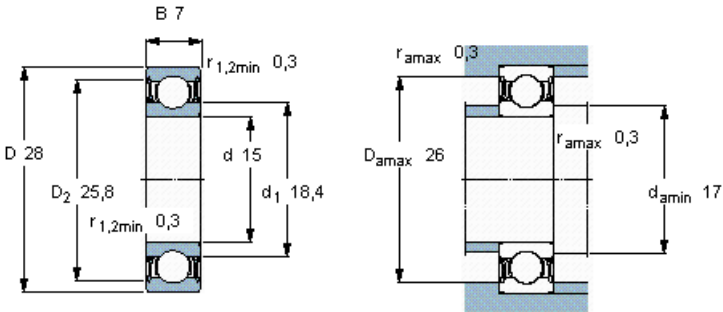

Calculation factors

k_f 0,02
 f_0 14