


Deep groove ball bearings, single row, low-friction seal on both sides



| Principal dimensions |    |   | Basic load ratings |        | Fatigue load limit<br>$P_u$ | Speed ratings   |                | Mass  | Designation |
|----------------------|----|---|--------------------|--------|-----------------------------|-----------------|----------------|-------|-------------|
| d                    | D  | B | dynamic            | static |                             | Reference speed | Limiting speed |       |             |
| mm                   |    |   | kN                 | $C_0$  | kN                          | r/min           |                | kg    | -           |
| 20                   | 37 | 9 | 6,37               | 3,65   | 0,156                       | 43000           | 20000          | 0,038 | 61904-2RZ   |

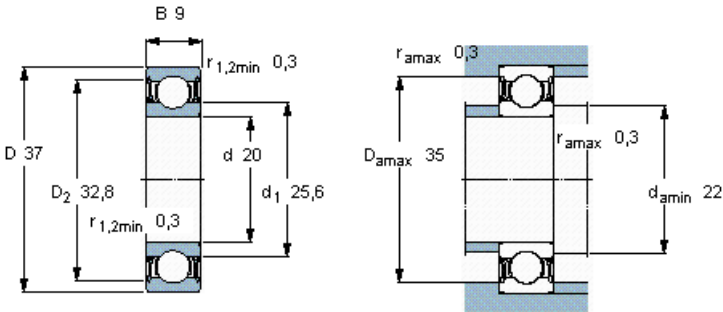

Calculation factors

$k_f$  0,02  
 $f_0$  15