


Deep groove ball bearings, single row, low-friction seal on both sides



Principal dimensions			Basic load ratings		Fatigue load limit P_u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C_0	kN	r/min		kg	-
25	42	9	7,02	4,3	0,193	36000	18000	0,045	61905-2RZ

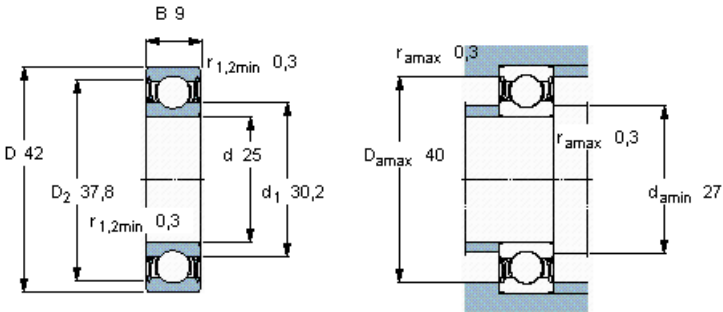

Calculation factors

k_f 0,02
 f_0 15