


Deep groove ball bearings, single row, shield on both sides



Principal dimensions			Basic load ratings		Fatigue load limit P_u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C_0	kN	r/min		kg	-
90	140	24	60,5	50	1,96	10000	5000	1,15	6018-2Z

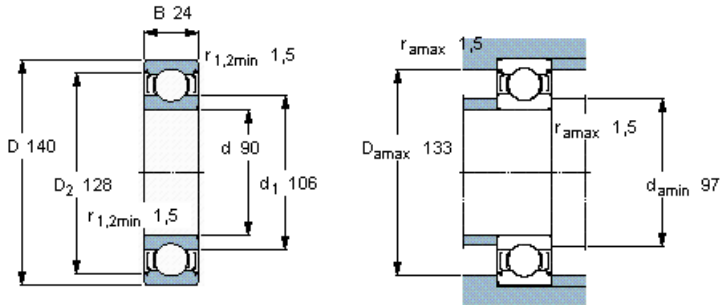

Calculation factors

k_f 0,025
 f_0 16