


Deep groove ball bearings, single row, shield on both sides



Principal dimensions			Basic load ratings		Fatigue load limit P_u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C_0	kN	r/min		kg	-
80	170	39	130	86,5	3,25	8500	4300	3,60	6316-2Z

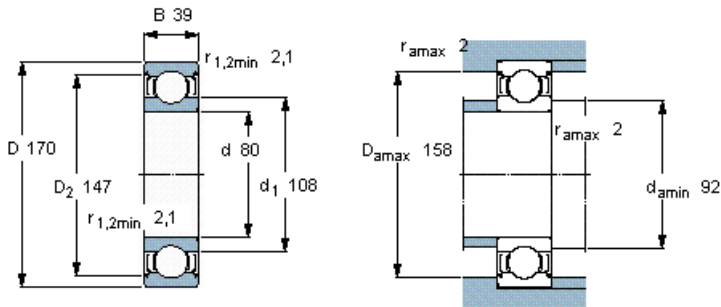

Calculation factors

k_f 0,03
 f_0 13