




HC ... Series (GE..KRRB)

Normal Duty

Eccentric Collar Lock

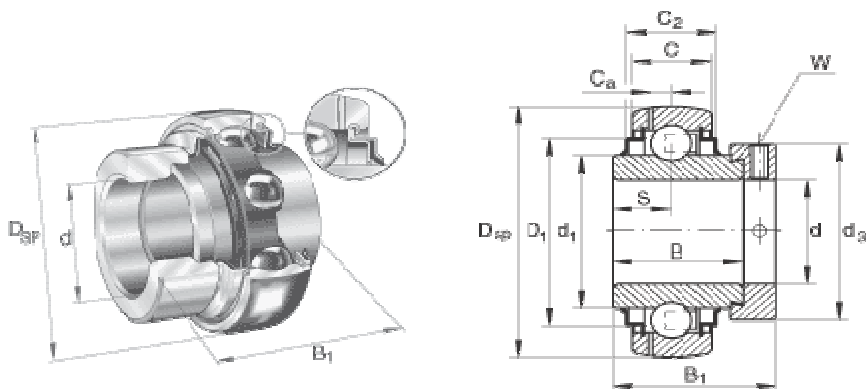

Bearing No.	Dimensions(mm)												Basic load rating (N)		Weight (kg)
	d	D _{SP}	B ₁	B	C	C ₂	C _a	D ₁	d ₁	d _{3 max}	S	W	Dynamic Cr	Static Cor	
HC203	17	40	37,3	27,8	14	16,6	3,5	31,6	23,9	28,6	13,9	3	9600	4750	0,16
HC204	20	47	43,5	34,0	16	16,6	4,4	37,4	27,6	33,3	17,0	3	12800	6600	0,20
HC205	25	52	44,3	34,8	17	16,7	4,3	42,5	33,8	38,1	17,4	3	14000	7800	0,25
HC206	30	62	48,3	36,4	19	20,7	5,0	52,0	40,2	44,5	18,2	4	19500	11300	0,38
HC207	35	72	51,1	37,6	20	22,5	5,8	60,3	46,8	55,6	18,8	5	25500	15300	0,55
HC208	40	80	56,3	42,8	21	23,5	6,3	68,3	52,3	60,3	21,4	5	32500	19800	0,74
HC209	45	85	56,3	42,8	22	26,4	6,8	72,3	57,9	63,5	19,0	5	32500	20400	0,81
HC210	50	90	62,7	49,2	23	26,4	6,5	77,3	62,8	69,9	19,0	5	35000	23200	1,00
HC211	55	100	71,3	55,4	25	29,0	7,2	85,9	69,8	76,2	27,7	5	43500	29000	1,42
HC212	60	110	77,7	61,8	27	29,0	8,2	94,5	76,5	84,2	25,4	5	52000	36000	1,84
HC213	65	125	66,1	48,5	28	32,0	8,9	109,0	85,2	96,0	21,5	6	62000	44000	2,71
HC214	70	125	66,1	48,5	28	32,0	8,9	109,0	85,2	96,0	21,5	6	62000	44000	2,45
HC215	75	130	67,1	49,5	28	30,5	8,5	113,0	90,0	100,0	21,5	6	62000	44500	2,65
HC216	80	140	71,0	53,2	30	38,0	8,8	120,0	97,0	108,0	23,4	6	72000	54000	2,95
HC218	90	160	69,5	52,0	32	35,0	10,0	138,0	109,4	118,0	23,0	6	96000	72000	3,72
HC220	100	180	75,0	57,5	36	39,0	11,2	155,5	122,2	132,0	25,5	6	122000	93000	4,65
HC224	120	215	81,0	63,5	40	45,0	12,9	186,5	146,4	152,0	28,5	6	155000	131000	6,93