



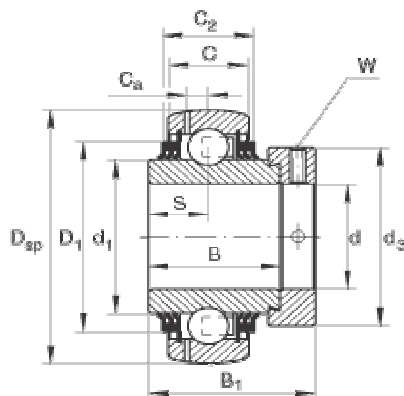

HC ... R3 Series (GE..KPPB-3)

Normal Duty

Eccentric Collar Lock with R3 seals

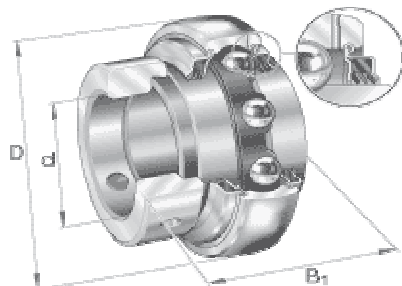

Bearing No.	Dimensions(mm)												Basic load rating (N)		Weight (kg)
	d	D _{SP}	B ₁	B	C	C ₂	Ca	D ₁	d ₁	d _{3 max}	S	W	Dynamic Cr	Static Cor	
HC204 R3	20	47	43,7	34,1	14	16,6	3,7	37,4	27,6	33,0	17,1	3	12800	6600	0,20
HC205 R3	25	52	44,4	34,9	15	20,2	3,9	42,5	33,8	37,5	17,5	3	14000	7800	0,25
HC206 R3	30	62	48,4	36,5	18	20,7	5,0	52,0	40,2	44,0	18,3	4	19500	11300	0,39
HC207 R3	35	72	51,1	37,7	19	22,4	5,7	60,3	46,8	51,0	18,8	5	25500	15300	0,56
HC208 R3	40	80	56,5	42,9	21	28,1	6,2	68,3	52,3	58,0	21,4	5	32500	19800	0,77
HC209 R3	45	85	56,5	42,9	22	26,4	6,4	72,3	57,9	63,0	21,4	5	32500	20400	0,86
HC210 R3	50	90	62,7	49,2	22	26,4	6,9	77,3	62,8	69,0	24,6	5	35000	23200	1,06
HC211 R3	55	100	71,4	55,5	25	29,0	7,0	85,9	69,8	76,0	27,8	5	43500	29000	1,42
HC212 R3	60	110	77,8	61,9	24	29,0	7,6	94,5	76,5	84,0	31,0	5	52000	36000	1,84
HC213 R3	65	120	66,1	48,5	28	32,0	8,9	109,0	85,2	96,0	21,5	6	62000	44000	2,71
HC214 R3	70	125	66,1	48,5	28	32,0	8,9	109,0	85,2	96,0	21,5	6	62000	44000	2,45
HC215 R3	75	130	67,1	49,5	28	30,5	8,5	113,0	90,0	100,0	21,5	6	62000	44500	2,65
HC216 R3	80	140	71,0	53,2	30	38,0	8,8	120,0	97,0	108,0	23,4	6	72000	54000	2,95