

■ Non-insulated receptacles with lateral conductor connector 0.5 - 2.5 mm²

- For fine and superfine stranded conductors

Characteristics



- Non-insulated

Material

- CuZn (brass)

Surface

- tin plated



Nominal cross section mm ²	Part No.	Type	Tab Thickn.	Tab Width	Dimension mm							Weight/ 100 pcs. ~ kg	pcs.
					l1	l2	l3	l4	a1	a2	s		
0.5-1	3720	B	0.8	6.3	12.50	7.4	4.0	7.2	11.0	3.0	0.38	0.080	100
0.5-1.5	3725	C	0.8	6.3	11.00	7.4	4.0	7.2	7.5	4.0	0.45	0.085	100
1.5-2.5	3735	B	0.8	6.3	13.50	7.0	4.0	7.2	11.0	3.0	0.38	0.085	100

► Tool: see chart page 185

■ Non-insulated tabs 0.5 - 6 mm²

- For fine and superfine stranded conductors

Characteristics


- Non-insulated

Material

- CuZn (brass)

Surface

- tin plated

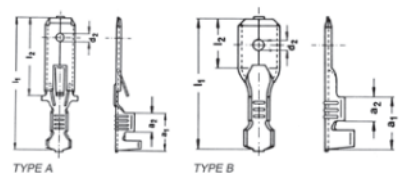

Nominal cross section mm ²	Part No.	Nominal size to DIN	Type	Tab Thickn.	Tab Width	Dimension mm					Weight/ 100 pcs. ~ kg	pcs.
						d2	l1	l2	a1	a2		
0.5-1	2235	DIN 46244	A	0.8	2.8	1.30	22.5	12.7	6.0	3.2	0.045	100
	2220	DIN 46343 B 6.3 - 1 part 3	A	0.8	6.3	1.65	28.0	16.0	8.2	4.0	0.085	100
1.5-2.5	1830	DIN 46248 A 6.3 - 2.5 part 3	B	0.8	6.3	1.65	20.0	8.0	9.0	4.5	0.065	100
	2230	DIN 46343 B 6.3 - 2.5 part 3	A	0.8	6.3	1.65	28.0	16.0	8.2	4.0	0.090	100
4-6	2250	DIN 46343 B 6.3 - 6 part 3	A	0.8	6.3	1.65	28.0	16.0	8.2	4.0	0.100	100

► Tool: see chart page 185