

■ Insulated parallel compression joints 0.1 - 6 mm²

- For fine and superfine stranded conductors

Characteristics


- Insulation sleeve: PA, free of halide
- Colour-coding for cross-section assignment

Material

- Cu-ETP

Surface

- tin plated

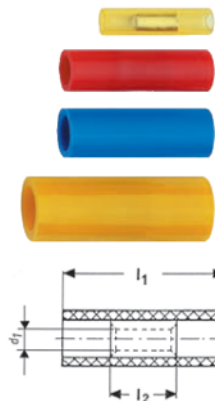

Nominal cross section mm ²	Part No.	Colour	Dimension mm			Weight/ 100 pcs. ~ kg	pcs.
			d1	l1	l2		
0.1-0.4	769	■	1.2	13	5	0.020	100
0.5-1	770	■	1.6	17	7	0.030	100
1.5-2.5	780	■	2.3	17	7	0.035	100
4-6	790	■	3.6	21	7	0.105	100

► Tool: see chart page 184

■ Non-insulated receptacles 0.5 - 6 mm²

- For fine and superfine stranded conductors

Characteristics

- Manufactured to DIN 46247, part 1 – 3 and similar versions
- Non-insulated

Material


- CuZn (brass)

Surface

- tin plated

Order info

- * = This part is available in nickel-plated steel; part number appendix "ST"

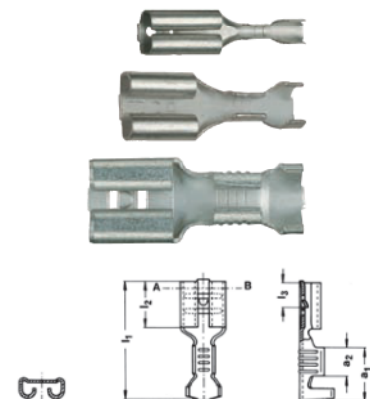

Nominal cross section mm ²	Part No.	Nominal size to DIN	Tab Thickn.	Tab Width	Dimension mm						Weight/ 100 pcs. ~ kg	pcs.
					l1	l2	l3	a1	a2	s		
0.5-1	18251	--	0.5	2.8	12.5	5.0	3.3	5.0	2.8	0.30	0.025	100
	18251A	--	0.8	2.8	12.5	5.0	3.3	5.5	2.5	0.30	0.025	100
	18201A	B 2.8 – 1	0.8	2.8	14.0	6.3	3.3	5.5	2.5	0.25	0.025	100
	18202	--	0.5	4.8	15.6	6.0	3.8	6.0	3.4	0.35	0.050	100
	18203	4.8 – 1	0.8	4.8	15.6	6.0	3.8	6.0	3.4	0.35	0.050	100
	1720	6.3 – 1	0.8	6.3	19.0	7.4	4.0	8.5	4.5	0.45	0.085	100
1.5-2.5	18303	4.8 – 2.5	0.8	4.8	15.6	6.0	3.8	6.0	3.4	0.35	0.055	100
	*1730	6.3 – 2.5	0.8	6.3	19.0	7.4	4.0	8.5	4.5	0.45	0.082	100
4-6	*1750	6.3 - 6	0.8	6.3	19.0	7.4	4.0	8.5	4.5	0.45	0.100	100

► Tool: see chart page 185