



■ Non-insulated receptacles, multiple type 0.5 - 2.5 mm²

■ For fine and superfine stranded conductors

Characteristics


■ Manufactured to DIN 46247, part 1 – 3 and similar versions

Material

■ CuZn (brass)

Surface

■ tin plated

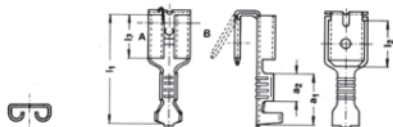

Nominal cross section mm²	Part No.	Tab Thickn.	Tab Width	Dimension mm						Weight/ 100 pcs. ~ kg	pcs.
				I1	I2	I3	a1	a2	s		
0.5-1	18203AZ	0.8	4.8	15.6	7	6.0	6.0	3.4	0.38	0.09	100
1.5-2.5	18303AZ	0.8	4.8	15.6	7	6.0	6.0	3.4	0.38	0.09	100
	1730AZ	0.8	**6,3	19.2	8	7.5	8.5	4.5	0.38	0.13	100

► * = according to DIN 46345

► Tool: see chart page 185



■ Non-insulated receptacles 0.5 - 6 mm²

■ For fine and superfine stranded conductors

Characteristics

■ Manufactured to DIN 46340, sheet 3


■ With latch to engage in housing

Material

■ CuZn (brass)

Surface

■ tin plated

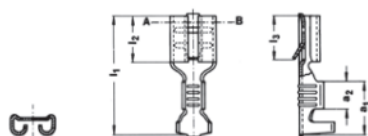

Nominal cross section mm²	Part No.	Tab Thickn.	Tab Width	Dimension mm						Weight/ 100 pcs. ~ kg	pcs.
				I1	I2	I3	a1	a2	s		
0.5-1	2720	0.8	6.3	19.2	7.4	7	8.5	4.5	0.38	0.070	100
1.5-2.5	2730	0.8	6.3	19.2	7.4	7	8.5	4.5	0.38	0.075	100
4-6	2750	0.8	6.3	19.2	7.4	7	8.5	4.5	0.38	0.090	100

► Tool: see chart page 185