


Product datasheet (2012-08-13)

AS segment ankers

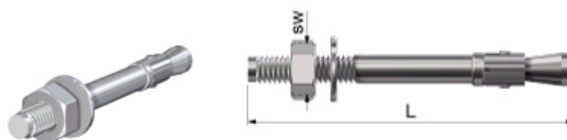

Type	Aansluiting	Afmetingen		Boor- diameter [mm]	Boor- diepte [mm]	Max. werk- belasting (kN) *	Trek [kN] *		Code- nummer
		L. [mm]	Sleutel- wijdte (SW)						
AS 8 x 75 **	M 8	75	13	8	65	5,31	4,84	100	82035
AS 8 x 50	M 8	50	13	8	40			100	82030
AS 8 x 90	M 8	90	13	8	65	5,31	4,84	100	82036
AS 8 x 115	M 8	115	13	8	65	5,31	4,84	100	82037
AS 10 x 90	M 10	90	17	10	70	8,19	6,03	100	82040
AS 10 x 120	M 10	120	17	10	70	8,19	6,03	50	82041
AS 10 x 150	M 10	150	17	10	70	8,19	6,03	50	82042
AS 12 x 110	M 12	110	19	12	85	11,77	9,29	50	82045
AS 12 x 150	M 12	150	19	12	85	11,77	9,29	50	82046
AS 12 x 160	M 12	160	19	12	85	11,77	9,29	50	82047

* In ongescheurd beton C20/25, -5 °C - 50 °C.

** Standaard voorzien van S 8s 8 x 28 carrosseriering.



Wij behouden ons het recht voor om ontwerpen en technische specificaties van onze producten te wijzigen.