


Deep groove ball bearings, single row, low-friction seal on both sides

Product information



Tolerances , see also text
Radial internal clearance , see also text
Recommended fits
Shaft and housing tolerances

Principal dimensions			Basic load ratings		Fatigue load limit P_u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C_0	kN	r/min		kg	-
20	42	12	9,95	5	0,212	38000	19000	0,069	6004-2RSL *

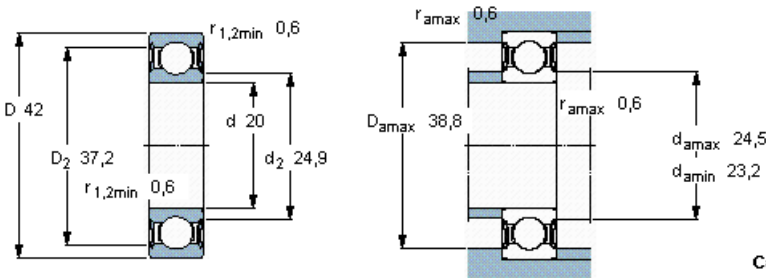

Calculation factors

k_f 0,025
 f_0 14