




DATA SHEET ILC VEHICLE CHARGER

MODEL	ILC
Product description	Single vehicle charger
Certification	e17*72/245*2006/28*0124*02
Input voltage	12...24VDC
Charging temperature	0°C ... +40°C
Charge current	800mA
Trickle charge current	100mA
Enclosure	High impact PA / Aluminium
Weight	485 g
Dimensions	Approx. 153 mm (L) x 138 mm (W) x 88 mm (H)
Mounting	Wall mounted vertical or horizontal
Compatible product	IL-600, IL-6000 GT, IL-60, IL-80 ATEX LED, IL-800
Charging time	11 h: IL-60 NiMH, IL-600 NiMH, IL-6000 GT NiMH 9,0A 7 h: IL-60 NiCd, IL-600 NiCd 6 h: IL-80 ATEX LED NiMH, IL-800 NiMH
Charging features	Sophisticated recharge and battery protection: Charging curve control Ambient temperature control
Accessories	MICA IL-2 mains adapter MICA CR-13 power supply for max. 3 ILC chargers MICA CR-15 power supply for max. 5 ILC chargers MICA VAC-VDC changeover unit from car battery MICA cigarette lighter cable

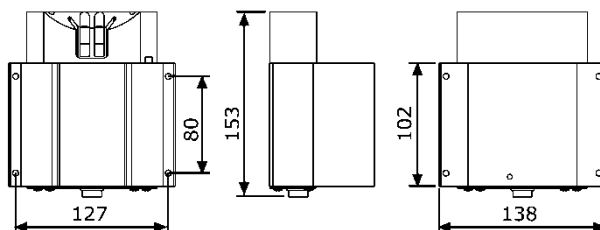

Made in Finland by ATEXOR Oy

05/03/2014

Tel: +358 207 343250, E-mail: info@atexor.com www.atexor.com

ATEXOR Oy prepared this information herein in good faith but makes no representation as to its comprehensiveness or accuracy. ATEXOR Oy reserves the right to make changes to specifications and product descriptions at any time without notice. Ask for more technical data from our sales support.