


## NULG Pre-insulated Connector

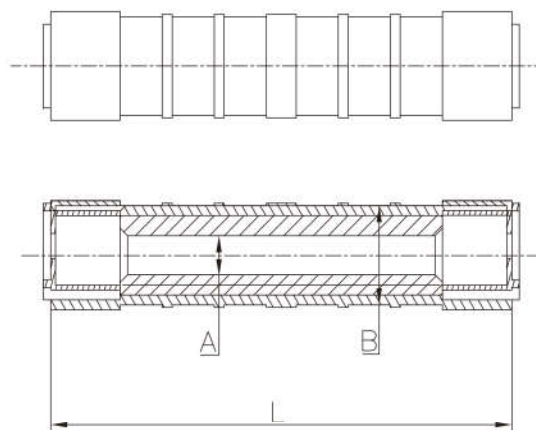

- The NULG pre-insulated connector is designed for service and lighting cables.
- Cross-section of conductor can be easily identified by the color code of rings
- Elastomeric ring and pre-filled grease enable super waterproof performance
- Watertightness test carried out at 6kV for 1 minute under water
- Insulation tube is made of weather and UV resistant polymer
- Standard: EN 50483-4 , NFC 33-021

Item No.	Cable Size(mm <sup>2</sup> ) A	Plastic sleeve Diameter(mm) B	Length L(mm)	Package (pcs)	Gross weight (kg)
NULG 16/16	16	16	70.5	200	5.5
NULG 25/25	25	16	70.5	200	7.5
NULG 35/35	35	20	98.5	200	12
NULG 50/50	50	20	98.5	200	12
NULG 54.6/54.6	54.6	20	98.5	200	10
NULG 70/70	70	20	98.5	200	10
NULG 95/95	95	20	98.5	200	10

Note: we can also customize for you according to your cable size