

שעוני פיקוד מכניים שבועיים

להתקנה על פס דין, למתח עבודה 16A/230V 50/60 Hz

מק"ט	תיאור המוצר	מגעים	סוללות גיבוי	רוחב מודול	זמן מיתוג	דגם
108024	שבועי + מפסק 1-Auto	מגע פתוח	100 שעות	1	2 שעות	ELO-W
108025	שבועי ורטיקלי + מפסק 1-0-2	מגע מחליף	100 שעות	2	2 שעות	BIO-W
108026	שבועי + מפסק 1-0-2 + מחוגים	מגע מחליף	200 שעות	2	3 שעות ו-30 דקות	DUET-W
108027	שבועי + מפסק 1-0-2 + מחוגים	מגע מחליף	200 שעות	3	2 שעות	ARVO-W
108017	יומי שבועי + מפסק 1-0-2 + מחוגים. 2 תצוגות - שבועית ויומית	מגע מחליף	200 שעות	5	15 דקות ושעתיים	AIKO-DW

■ תקנים: CE, IEC, CEE, UL ■ הערות: סוללת גיבוי מסוג ליטיום (Lithium) ■ מנגנון קוורץ



108024



108025



108026



108027



108017

א.ר. אסקו יבוא ושיווק בע"מ

יבוא ושיווק חומרי חשמל לתעשייה | טל. 072-2114114 | פקס. 03-9641744 | WhatsApp. 054-4433230

שד' גן רווה 1, א.ת. צפוני יבנה, ת.ד. 13078 מיקוד 8122202

Electromechanical time switches

ARVO

DIMENSIONS (mm)

CONNECTION DIAGRAM


Electromechanical time switches with daily or weekly programming by trippers for household use. The NiMH battery allows a charge reserve of 150 hours and it can be replaced once depleted by opening the front cover of the instrument.




- 1 Trippers for the programming of activation time
- 2 Switch for the choice of the operating mode
- 3 Dial for time and minutes regulation
- 4 Sealable cover
- 5 Container: 2.5 DIN modules
- 6 Battery drawer (for replacement)




Front view

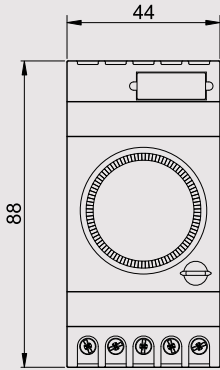

Side view

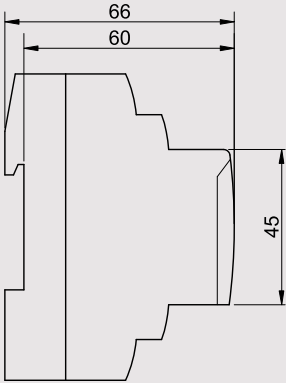

Diagram

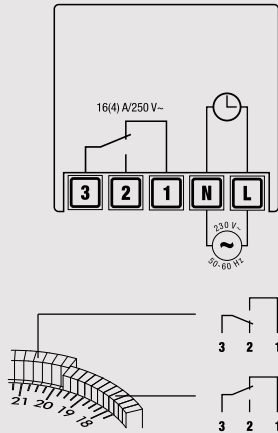

TIME AND MANAGEMENT

DAILY/WEEKLY TIME SWITCHES

- Power supply: 230Vac (-15% ÷ +10%)
- Output relays capacity: 16(4) A / 250 Vac
- Operating mode:
 - O** always OFF
 - A** automatic (according to the set programming with the trippers)
 - I** always ON
- NiMH battery (V80H type) rechargeable and replaceable by the front cover of the instrument
- Charge reserve of 150 hours



ARVO-D

- daily programming
- 24 hours quadrant with 96 trippers
- every tripper covers 0.25 hours (15 minutes)



ARVO-W

- weekly programming
- 7 days quadrant with 84 trippers
- every tripper covers 2 hours (120 minutes)

TECHNICAL INFORMATION

GENERAL CHARACTERISTICS

Power supply	V AC	230 (- 15% ÷ +10%)
Frequency	Hz	50 / 60
Absorption	W	0.5
Output relays capacity		16(4) A / 250 Vac
Operating precision		± 1 second/day at 23°C
Quadrant type	- ARVO-D	96 trippers
	- ARVO-W	84 trippers
Minimum intervention time:	- ARVO-D	15 minutes
	- ARVO-W	2 hours (120 minutes)
Intervention precision:	- ARVO-D	±5 minutes
	- ARVO-W	± 30 minutes
Charge reserve	h	150 (NiMH battery rechargeable and replaceable)
Operating temperature		-10 °C ÷ +50 °C
Class of protection		II
Degree of protection		IP20
Container		2.5 DIN module

REFERENCE STANDARDS

Compliance with Community Directives: 2014/35/EU (LVD) • 2014/30/EU (EMCD) is declared with reference to the following Harmonized Standards: EN 60730-2-7

CONNECTABLE LOADS

Incandescent		3000 W
Fluorescent (neon)		1200 VA
Low voltage halogen		2000 VA
Halogen (230 V~)		3000 W
Low consumption (CFL)		1000 VA
Low consumption (CFL)		900 VA
Led		200 VA

Code	Model	Description
VP882500	ARVO-D	Daily electromechanical time switch
VP883300	ARVO-W	Weekly electromechanical time switch