

Serie | 6 Hoods

**DID106T50 brushed steel**  
**Ceiling hood**  
**100 cm wide**  
**Appliance colour: brushed steel**



**Suspended ceiling hood: in recirculation mode.**

- **Suspended ceiling hood:** for an easy installation in the ceiling.
- **Extraction rate in recirculation:** at 850 m3/h, it quickly ensures optimal kitchen air quality.
- **LED lighting:** for an indirect lighting at extremely low energy consumption.
- **Intensive speed setting with reset:** automatically resets the hood to normal speed setting after 6 min..

**Technical Data**

Typology :	Traditional
Approval certificates :	CE
Length electrical supply cord (cm) :	0
Net weight (kg) :	27.0
Type of control :	Electronic
Number of speed settings :	3
Maximum output air extraction (m3/h) :	0
Boost position output recirculating (m3/h) :	850
Maximum output recirculating air (m3/h) :	780
Number of lights :	2
Diameter of air outlet (mm) :	150
Grease filter material :	Washable aluminium
Odour filter :	Yes
Operating Mode :	Recirculating air only
Delay Shut off modes :	30M
Optional accessories :	DHZ5418, DSZ500P
Total power of the lamps (W) :	12
Grease filter type :	Kassette
Connection Rating (W) :	192
Current (A) :	16
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	no plug
Installation typology :	Half-integrated
Material body :	Lacquered, Stainless steel
Approval certificates :	CE
Plug type :	no plug
Dimensions of the product, with chimney (if exists) (in) :	/ x x
Dimensions of the packed product (in) :	16.53 x 57.08 x 37.00
Net weight (lbs) :	60
Gross weight (lbs) :	103
Motor location :	Integrated motor in hood body
No-return airflow flap :	No
Length electrical supply cord (cm) :	0
Dimensions of the product, with chimney (if exists) (mm) :	243 x 1000 x 700
Net weight (kg) :	27.0
Gross weight (kg) :	47.0



**Optional accessories**

- DHZ5418 : cable guidance frame  
DSZ500P : Active carbon filter

## Serie | 6 Hoods

**DID106T50 brushed steel**

**Ceiling hood**

**100 cm wide**

**Appliance colour: brushed steel**

**Suspended ceiling hood: in recirculation mode.**

**Variant:**

**Design:**

**Operating and power:**

**Environment and safety:**

**Comfort:**

**Measures:**

- Appliance colour: brushed steel
- Ceiling mounted hood
- Suitable for recirculated operation
- For recirculated extraction charcoal filter (accessory) needed
- Prolonged filter life-time due to a multiple regeneration of the charcoal filter
- Charcoal filter included at first delivery
- 2 high-performance blowers
- Capacitor motor
- RimVentilation
- Filter cover stainless steel
- Metal grease filter, dishwasher safe
- Saturation indicator for metal and charcoal filter
- Lighting: 2 x LED bar 6W
- Light dimmer function
- Colour Temperature: 4000 K
- Electronic controls via remote control
- Infrared remote control
- Push button controls with Electronic display
- 3 speeds plus intensive setting
- Automatic revert
- Interval operation
- 30 min
- Extraction rate in recirculation mode:  
Max. normal use: 780 m<sup>3</sup>/h  
Intensive: 850 m<sup>3</sup>/h
- Noise levels in recirculation mode:  
Max. normal use: 70 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)  
Intensive: 72 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Max. extraction rate: 850 m<sup>3</sup>/h
- Dimensions in recirculation mode (HxWxD): 243 x 1000 x 700 mm
- Power rating: 192 W


## Serie | 6 Hoods

**DID106T50 brushed steel**


**Ceiling hood**

**100 cm wide**

**Appliance colour: brushed steel**

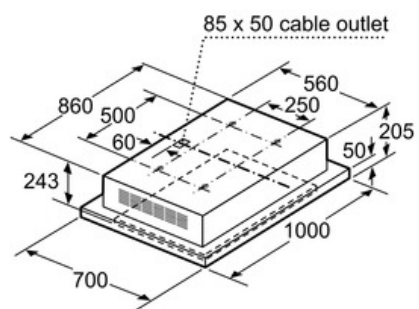

measurements in mm

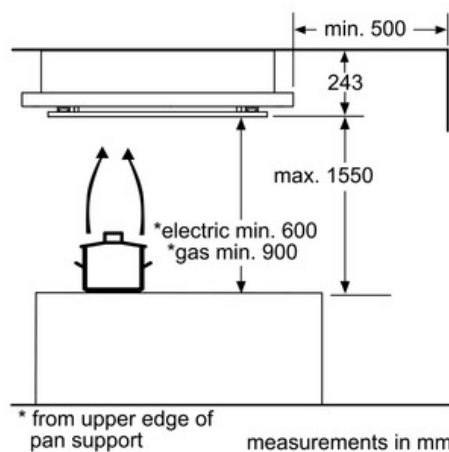

measurements in mm