

# MX-INDIGO 5000







## YG-LED623

www.sspworld.com

**MX-INDIGO 5000** is on target to replace the MSR575 and HMI575 discharge spot fixtures in many different kinds of applications. Combining multiple LED sources and unique optics, the MX-INDIGO 5000 is an economic and compact solution for small to medium productions or installations. The MX-INDIGO 5000 is another leap forward for LED in its occupation of the entertainment lighting market.

### Specifications

- Output**
  - Lux@2m: 34.000+ (using standard optic)
- Light Source**
  - LED Qty. : 3 x WHITE (60W)
  - Drive Current: 12A
- Electrical**
  - Input Voltage: 100~240 VAC
  - Power Consumption: 300W max. at full output
- Control**
  - On-board: Display for Static Color/ Auto/ Custom control
  - Control Protocol: DMX512
  - Control Personality: Advanced (18chs) / Basic (13chs)
- Optical System**
  - Dimmer: 0-100%
  - Strobe: 0-20Hz
  - Focus: Electronic Focus
  - Beam Angle: 18°
  - Rotating 3-facet prism
  - Pan: 540°
  - Tilt: 270°
- Movement**
  - Pan/tilt Resolution: 8-16 bit
  - Special: Pan/Tilt movement blackout
  - User-selectable pan/tilt ranges
- Gobo & Colors**
  - Rotating Gobo: 6pcs
  - Static Gobos: 7 Metal Gobos
  - Colors: 7dichroic filters + white
- Physical**
  - Dimensions: 408 x 296 x 634mm
  - Weight: 19.5Kg
  - Housing: Flame-retardant plastic (V0)
  - Color: Black
  - Fixture Connection: Data in/out, Power in
  - Cooling: Forced Convection
- Certification and Safety**
  - Certification: CE ,cETL
  - Max. ambient Temp: 45°C
  - Environment: Dry location

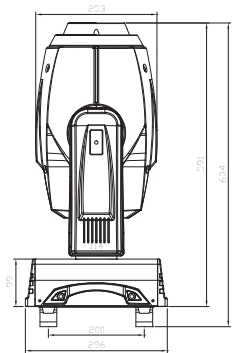

Illuminance at a Distance	Center Beam LUX		Beam Width	
	LUX	Beam Width	Beam Width	Beam Width
1.7m	14710.41 LUX	0.6m	0.6m	
3.3m	3677.61 LUX	1.0m	1.1m	
5.0m	1634.49 LUX	1.6m	1.7m	
6.7m	919.41 LUX	2.0m	2.2m	
8.3m	588.42 LUX	2.6m	2.7m	
10.0m	408.63 LUX	3.0m	3.2m	

■ Vert. Spread: 18°   ■ Horiz. Spread: 18°