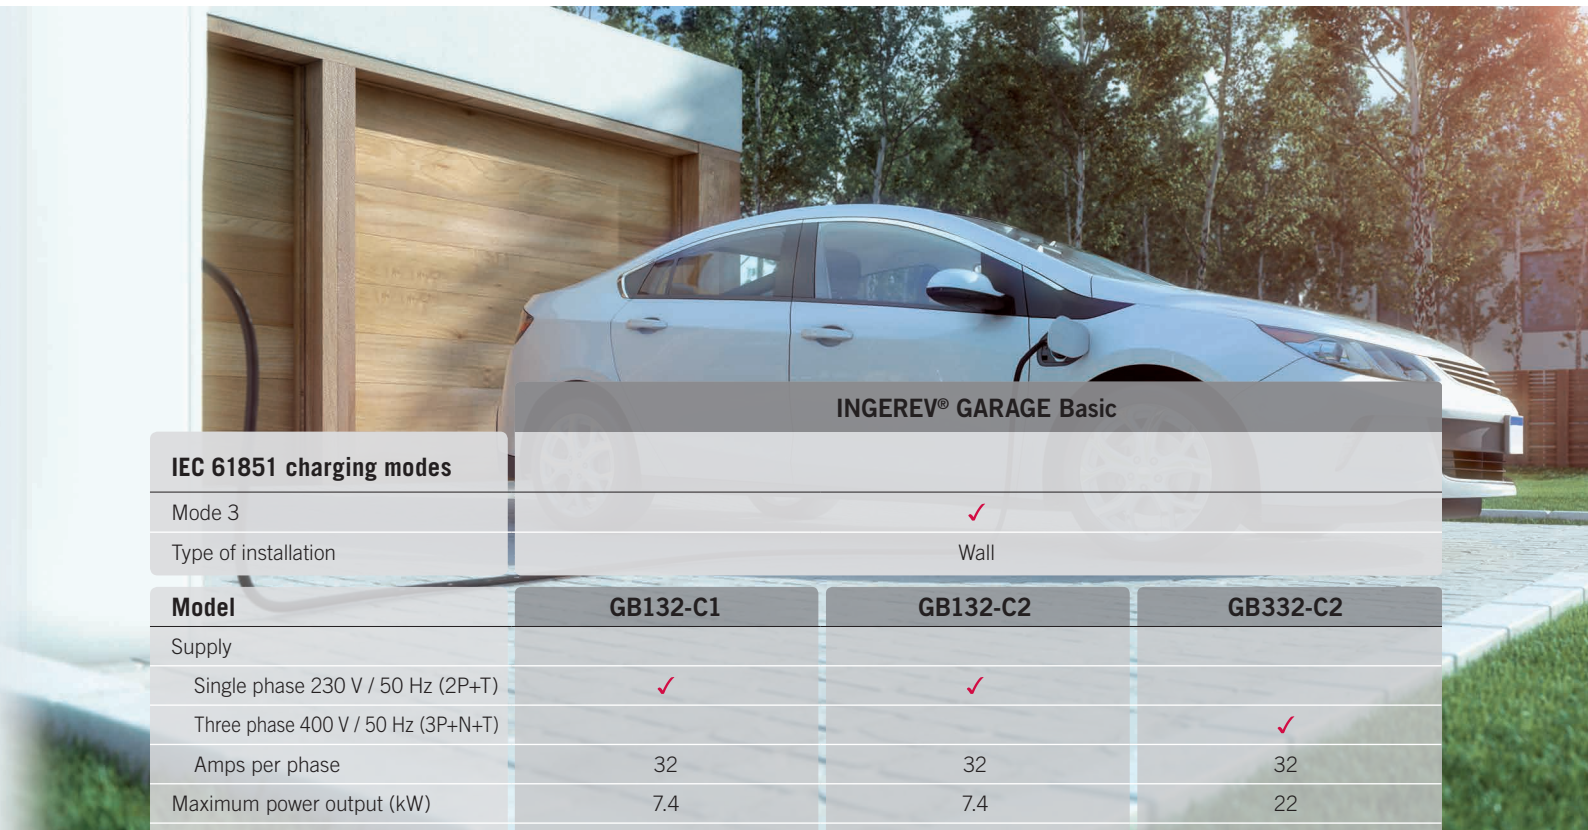


INGEREV**GARAGE Basic****ΙΔΑΝΙΚΟΣ ΦΟΡΤΙΣΤΗΣ ΑΥΤΟΚΙΝΗΤΩΝ
Για εταιρείες και οικίες****INGEREV® GARAGE Basic****IEC 61851 charging modes**

Mode 3

✓

Type of installation

Wall

Model	GB132-C1	GB132-C2	GB332-C2
Supply			
Single phase 230 V / 50 Hz (2P+T)	✓	✓	
Three phase 400 V / 50 Hz (3P+N+T)			✓
Amps per phase	32	32	32
Maximum power output (kW)	7.4	7.4	22
Connector			
IEC 62196-2 - Type 1 (5 m cable)	✓		
IEC 62196-2 - Type 2 (5 m cable)		✓	✓
Type of connection IEC 61851	C Connection		
Power meter	MID approved wattmeter		
Operating temperature	-25 °C to +50 °C		
Relative humidity	<95%		
Environmental protection rating	IP54 connector covered/ IP44 connector uncovered		
Configuration and data access	Via USB		
Vandal-proof class	IK10		
Directives	Low Voltage: 2014/35/EU EMC: 2014/30/EU		
Housing	Galvanized steel: RAL9003 Cast aluminum front		
Dimensions (height x width x depth)	472 x 360 x 166 mm (excluding cable)		
Weight	10 kg		
Optional Equipment*			
Differential current protection	30 mA Class A		
Protection against over-currents	C Curve Thermal Magnetic Circuit Breaker		
Communications	RS-485, Ethernet, 3G		
HMI	RFID (Mifare Classic 1K&4K, MifareDesFire WV1, NFC)		

Notes: * Check availability according to model.