

2. μ : 1. μ μ 96% μ IK10. μ
3. Το φωτιστικό έχει αναβαθμισμένα χαρακτηριστικά χρησιμοποιώντας 6.2W ηλιακό πάνελ και άριστης ποιότητας μπαταρία λιθίου LifePO4 3.2V 12AH. Προσφέρει συνεχόμενο φως για όλη τη νύχτα και εφεδρεία 3-4 ημερών σε περίπτωση συννεφιάς.
4. Στηρίζεται σε ιστό αλουμινίου που δεν διαβρώνεται, περιλαμβάνει ανοξείδωτες βίδες στήριξης και με μπουτόν αλλάζει το χρώμα φωτός 3.000-6.000K

Product Picture


- White RAL 9016
- Grey RAL 7045
- Black RAL 9011





NORATEX A.B.E.E.




 3~4 ημέρες αυτονομίας

 Ολονύκτια λειτουργία

 Μεγάλη φωτεινότητα

 Σε οποιοδήποτε χρωματισμό

 360°
3
8




Solar LED Bollard Light



Specification Sheet

Dimensions	38cm 60cm 90cm	38cm 60cm 90cm
Solar Panel	6.2W 5V	6.2W 5V
Battery	3.2V 12AH	3.2V 12AH
LED Source	2.2W SMD5050 51pcs	1.0W~2.5W SMD5050 36pcs
Luminous flux	>400lm (cool white)	>400lm (cool white)
LED CHIP	3000K + 6000K ● ●	3000K~6000K+ RGB ● ● ● ● ●
Control method	Press button to change color	2.4G Touch screen remote control
Remote control	NO	Yes
Charging time	5 hours	5 hours
Discharging time	>24 hours	>24 hours
Working Temp.	-15 °C ~ +70 °C	-15 °C ~ +70 °C
Enclosure Rating	IP65 + IK10	IP65 + IK10
Housing Material	Polycarbonate + aluminium	Polycarbonate + aluminium
Housing Color	White / Grey / Black	White / Grey / Black

Dimensions

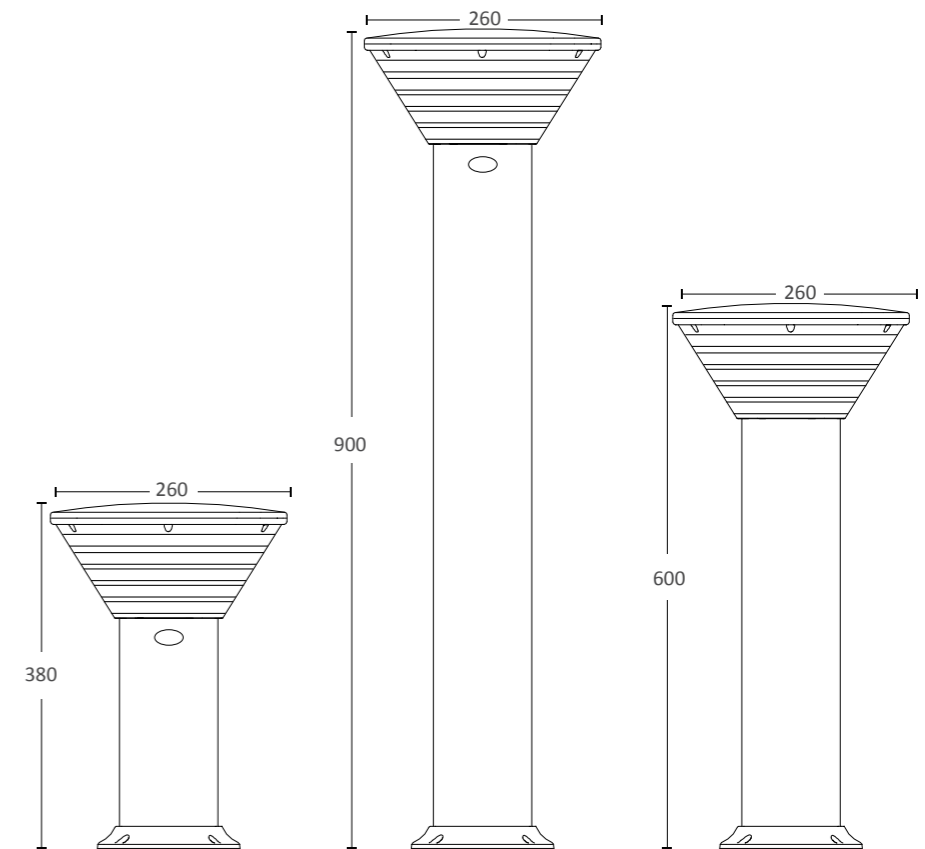

Application

