


### Specifications


SW-1	Push button
Current rating at 250V	Nominal 5A
	Thermal 12A
Material	Stainless steel 304, mat polished
Dimensions	250 * 75 * 15mm (L * W * H)
Operating temperature	0°C to +85°C
Protection degree	IP 66
Mechanical lifecycle	ca. 2 million switches
Warranty	2 years
Cable	3 x 0.75 mm, 500 mm length filled waterproof
Accessories	3 stickers

The specifications herein are subject to change without prior notice due to improvements.

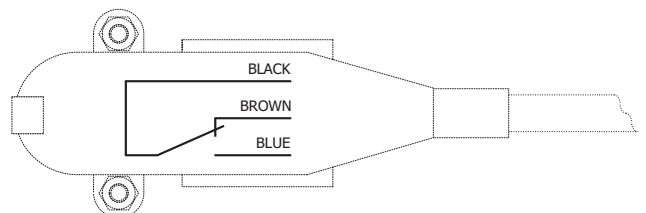

### OPTEX Technologies B.V.


Henricuskade 17  
2497 NB The Hague  
The Netherlands  
TEL.: +31 (0)70 419 41 00  
E-MAIL: info@optex.eu  
WEBSITE: www.optex.eu

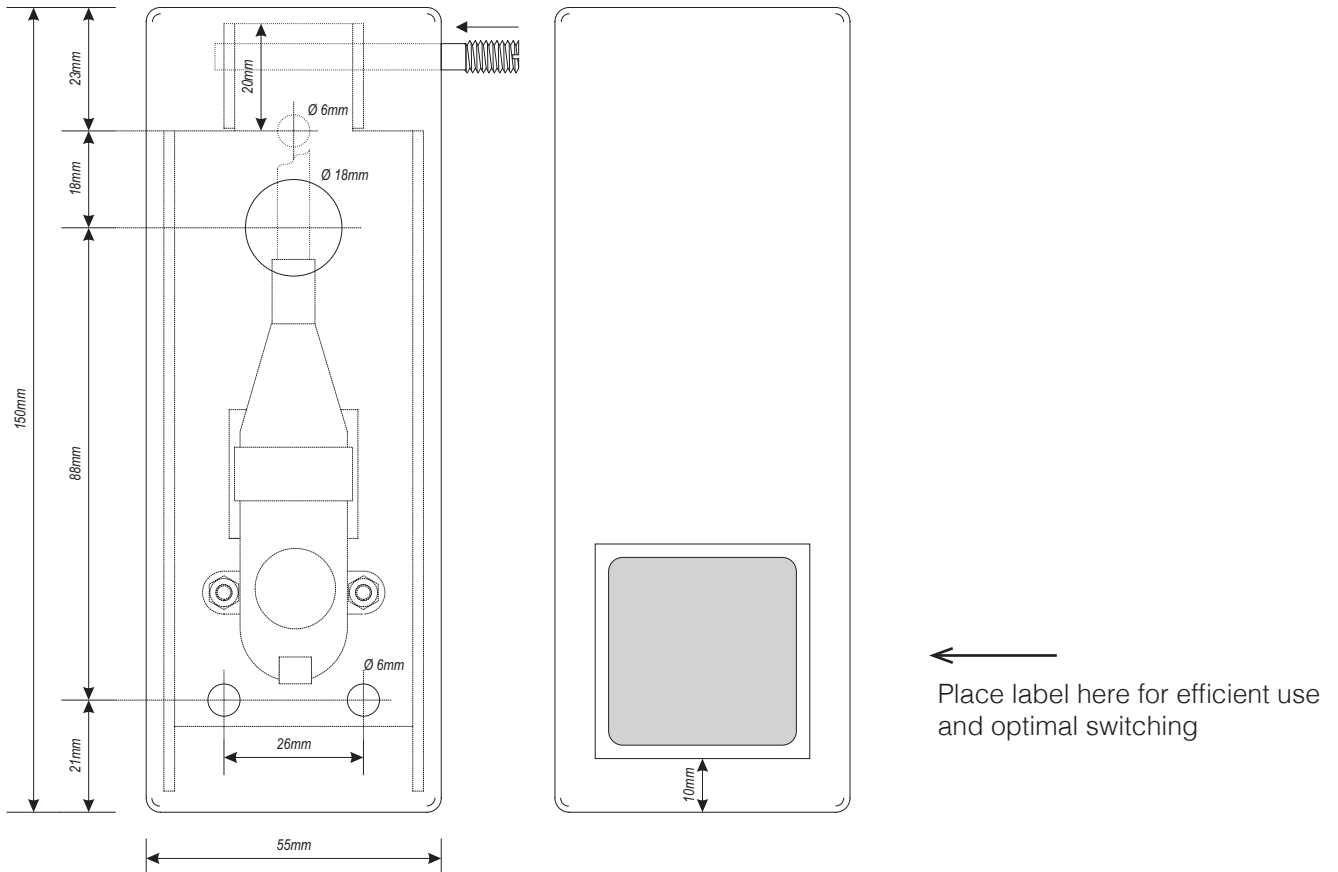

### Specifications

SW-2	Push button
Current rating at 250V	Nominal 5A Thermal 12A
Material	Stainless steel 304, mat polished
Dimensions	150 * 55 * 15mm (L * W * H)
Operating temperature	0°C to +85°C
Protection degree	IP 66
Mechanical lifecycle	ca. 2 million switches
Warranty	2 years
Cable	3 x 0.75 mm, 500 mm length filled waterproof
Accessories	3 stickers

The specifications herein are subject to change without prior notice due to improvements.

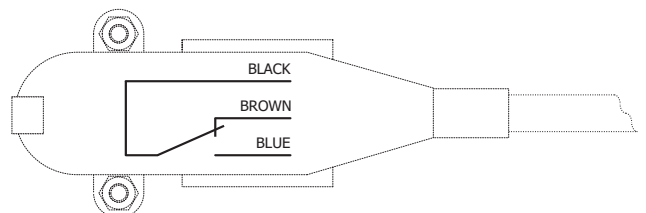

### OPTEx Technologies B.V.

Henricuskade 17  
2497 NB The Hague  
The Netherlands  
TEL.: +31 (0)70 419 41 00  
E-MAIL: info@optex.eu  
WEBSITE: www.optex.eu