

Evaluating the performance of Ni catalyst supported on $\text{La}_2\text{O}_3\text{-MgAl}_2\text{O}_4$ for dry reforming of methane in a packed bed dielectric barrier discharge (DBD) plasma reactor

Asif Hussain Khoja^{†,‡}, Muhammad Tahir[†], Nor Aishah Saidina Amin^{†}*

[†]Chemical Reaction Engineering Group (CREG), School of Chemical & Energy Engineering, Faculty of Engineering, Universiti Teknologi Malaysia (UTM), 81310 Skudai, Johor Bahru, Malaysia

[‡]Fossil Fuels Laboratory, Department of Thermal Energy Engineering, US-Pakistan Centre for Advanced Studies in Energy (USPCAS-E), National University of Sciences & Technology (NUST), Sector H-12 Islamabad (44000), Pakistan

*Corresponding Author's Email: noraishah@cheme.utm.my

Supplementary information

Article No: AF-2019-022364

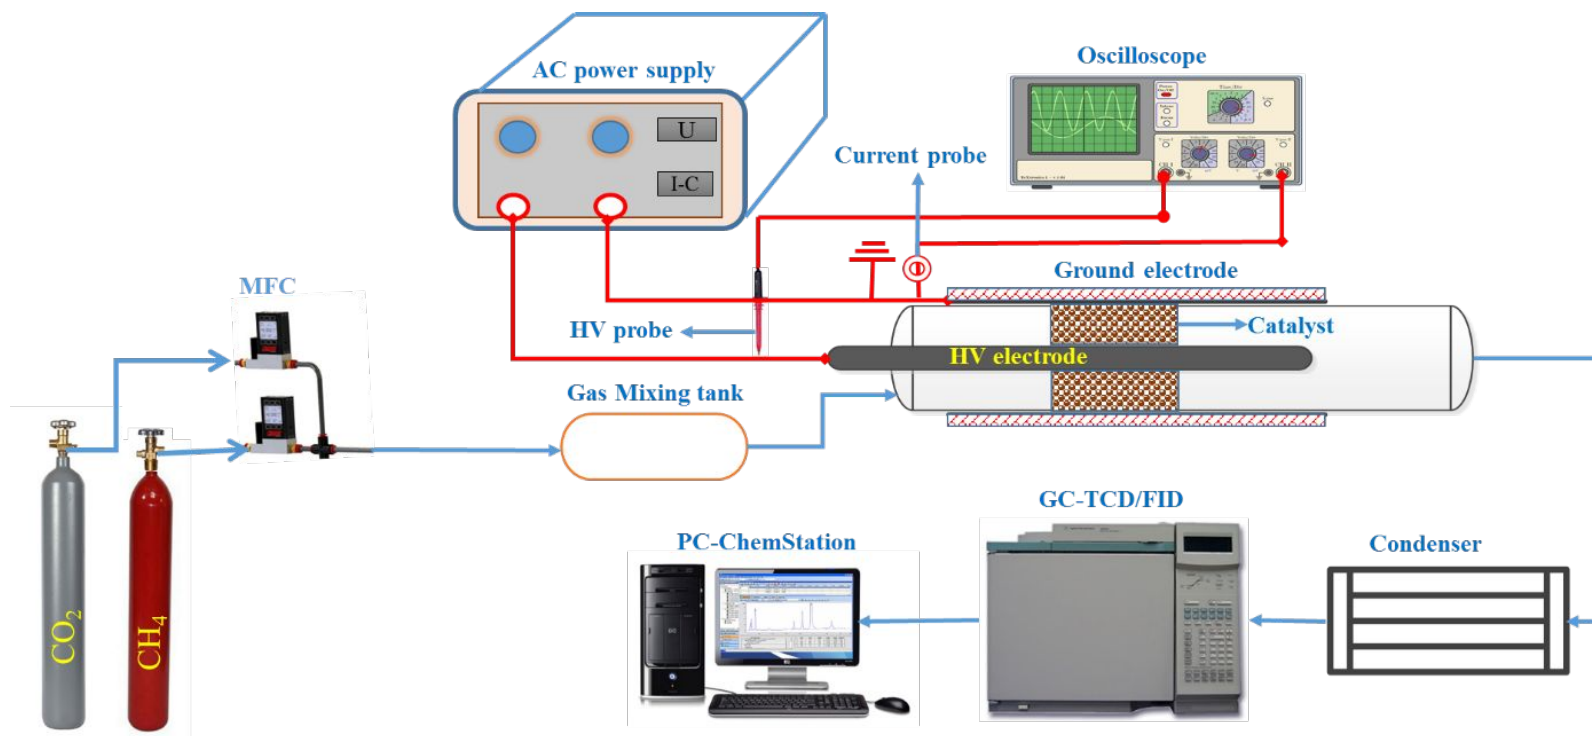


Figure S1: Schematic diagram of catalytic DBD plasma reactor.

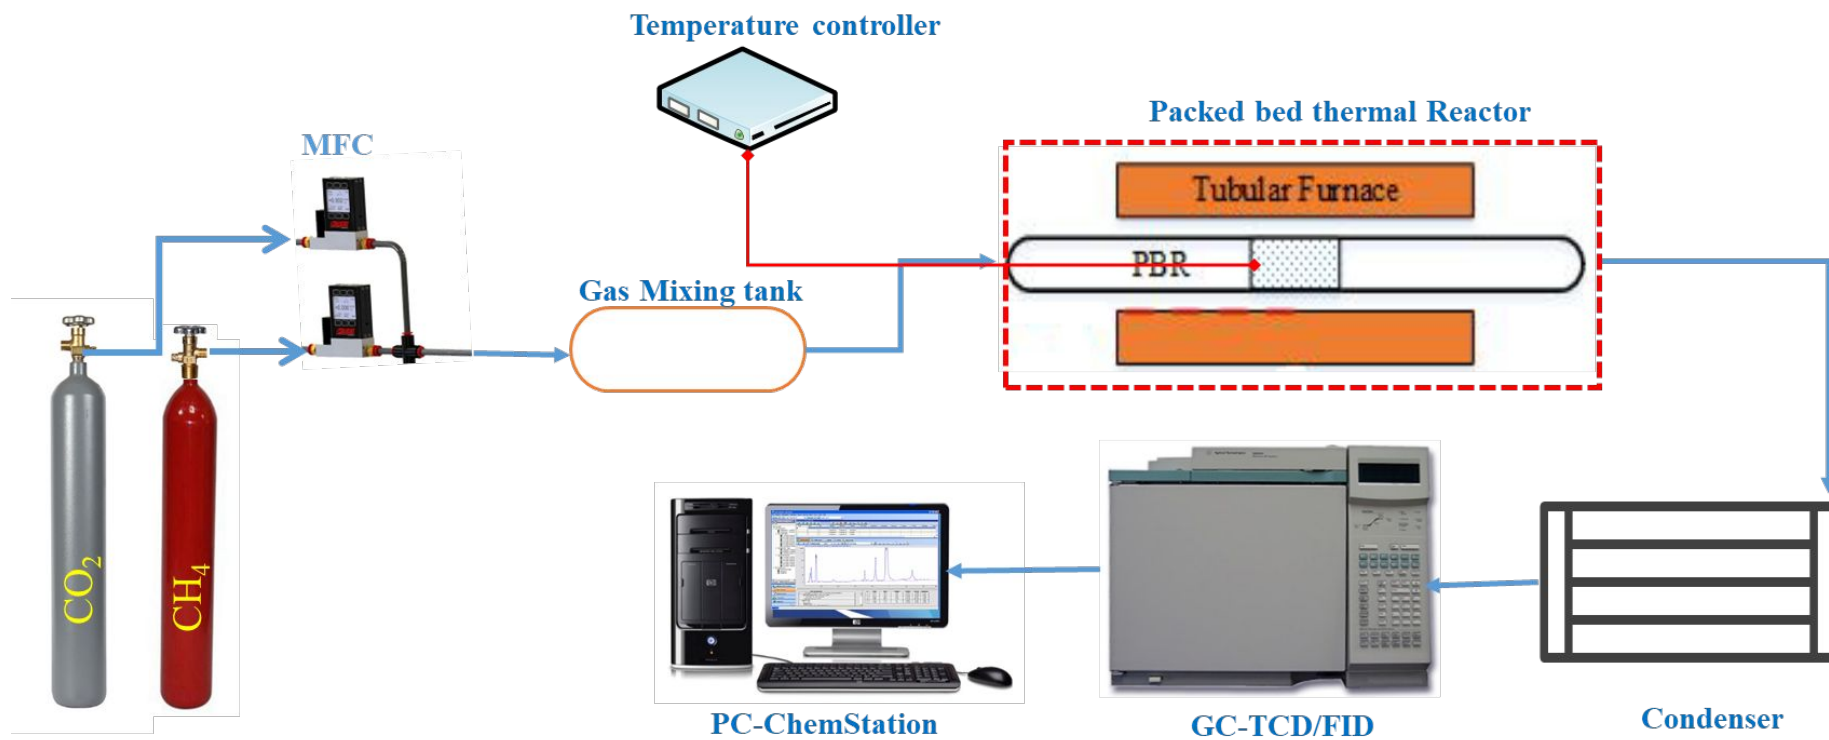


Figure S2: Experimental setup for thermal catalytic dry reforming of methane