

Supplementary Material


High-Performance Perovskite Solar Cells Based on Low-Temperature Processed Electron Extraction Layer

Shun-Hsiang Chan^a, Yin-Hsuan Chang^a and Ming-Chung Wu^{a,b,c*}


- a. Department of Chemical and Materials Engineering, Chang Gung University, Taoyuan 33302, Taiwan
- b. Green Technology Research Center, Chang Gung University, Taoyuan 33302, Taiwan
- c. Division of Neonatology, Department of Pediatrics, Chang Gung Memorial Hospital, Linkou, Taoyuan 33305, Taiwan

*Corresponding authors.

Ming-Chung Wu: E-mail, mingchungwu@cgu.edu.tw; phone, +886 3 2118800 #3834; fax, +886 3 3775580

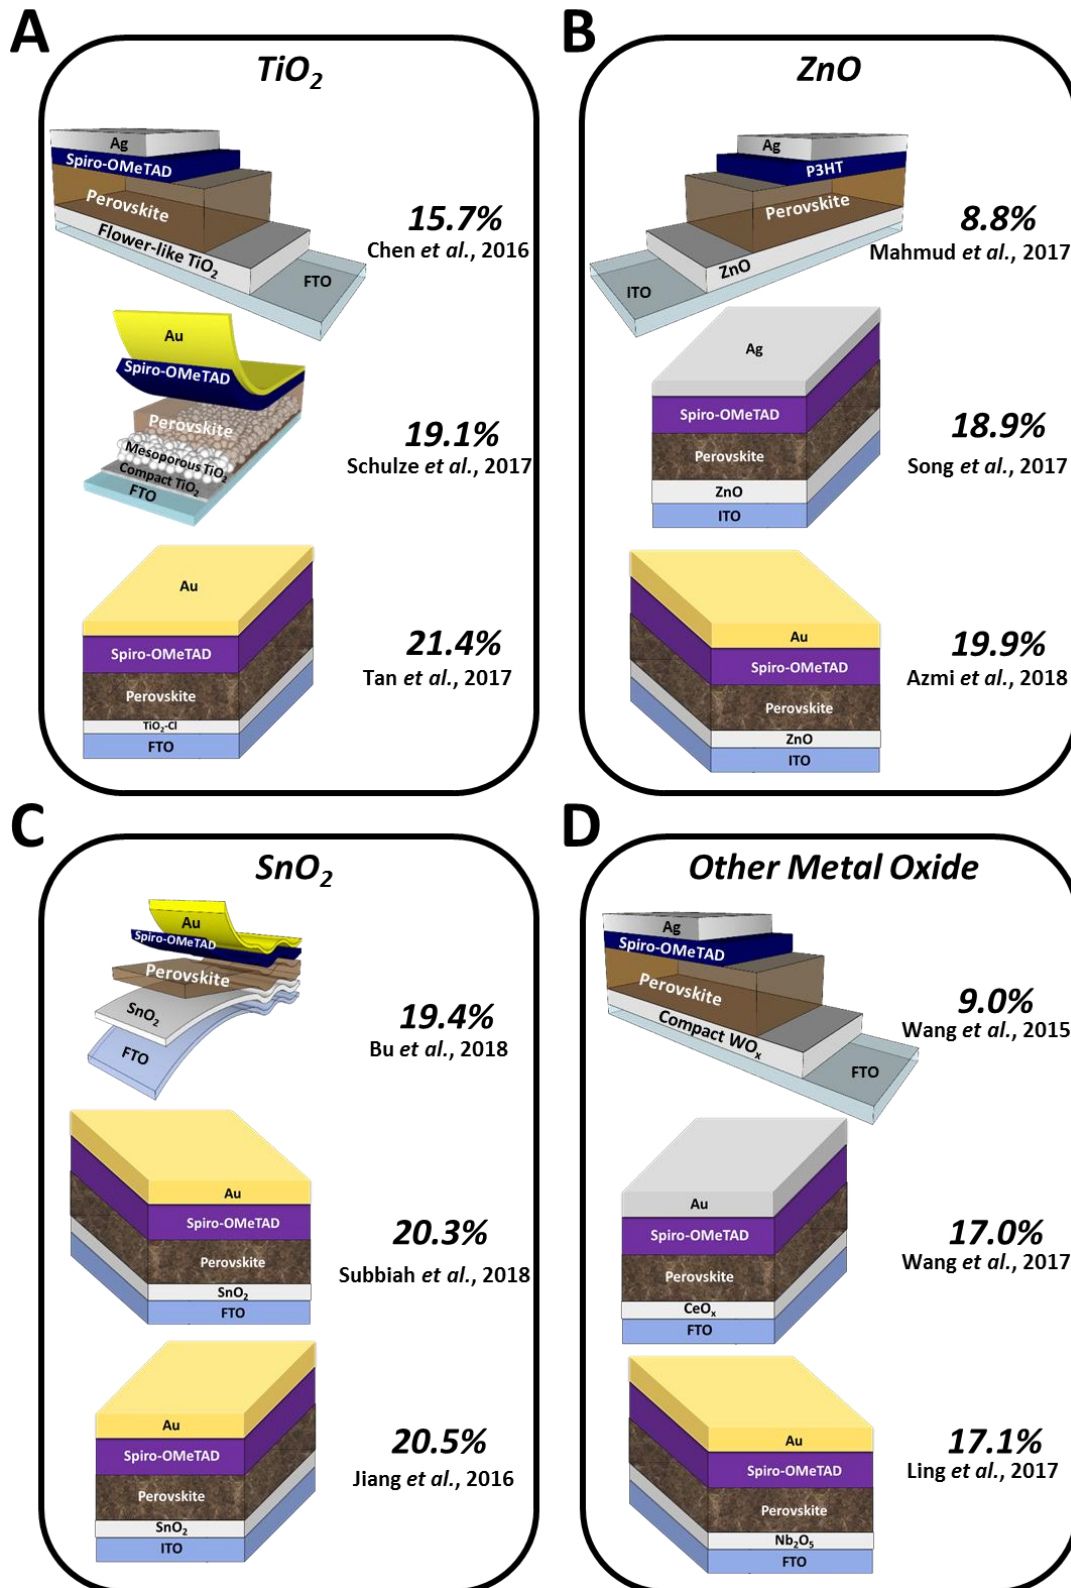

Supplementary Figure 1. Schematic diagram and corresponding PCE of n-i-p perovskite device with different EEL. (A) TiO_2 , (B) ZnO , (C) SnO_2 , and (D) other metal oxide.

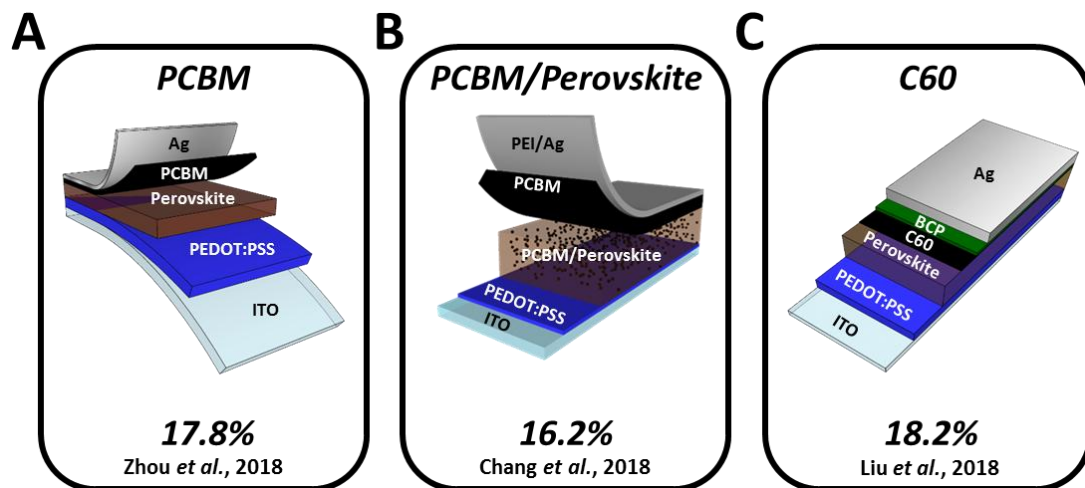

Supplementary Figure 2. Schematic diagram and corresponding PCE of p-i-n perovskite device with different EEL. (A) PCBM, (B) PCBM/perovskite BHJ, and (C) C60.